


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 20, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/3/00 Placed a 3/4" X 24" IRON ROD WITH DNR SURVEY MARKER CAP
DATE
DOWN 0.3' ON CL E-W GRAVEL ROAD +/- 66' W OF EDGE SWAMP

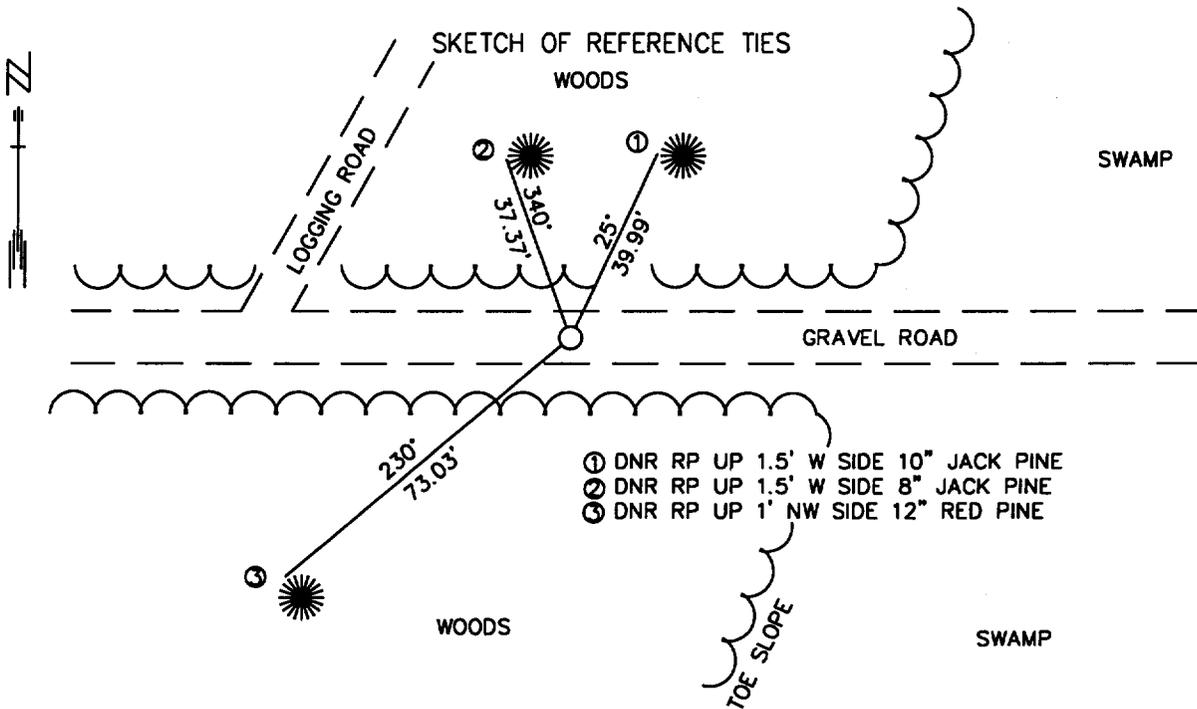

1983 CASS COUNTY SOUTH
COORDINATE SYSTEM
N= 225092.54
E= 431508.88

Statement of evidence relative to this corner location is on back of page.

JULY 2000
FOM01868

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 4/5/01
SIGNATURE DATE

License Number 16098

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER 434528
County of Cass

I hereby certify that this document was filed in the Co. Recorders Office at 2:35 P. M. on the 11th day of April A.D., 2001
County Recorder Kathryn M. Norby
By K. J., Deputy
DOCUMENT NO. 434528

Northeast Corner Section 20, Township 135 North, Range 32 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
 Cass County Surveyor
 Widseth, Smith and Nolting of Brainerd
 Landecker and Associates of Pequot Lakes
 Landecker and Associates of Walker
 Central Minnesota Surveying

1866 In October, the US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Black Pine 4" N 82.5 ° E 19 links (12.5')
 Black Pine 4" S 25.5 ° E 27 links (17.8')
 Black Pine 4" S 64.5 ° W 33 links (21.8')
 Black Pine 5" N 74 ° W 17 links (11.2')

1920 E.B. Horst found all four Government bearing tree stumps. He measured 2708.2' to the North Quarter Corner Section 20 and 2612.9' to the North Quarter Corner Section 21. Set 2" x 48" iron with new ties.

Jack Pine 10" S21 ° 45' W 47.7'
 Jack Pine 12" N 30 ° 30' E 58.5'
 Jack Pine 6" S 66 ° 15' ? 98.4'
 Jack Pine 5" N 49 ° 30' W 57.1'

2000 In March, the DNR survey crew searched for the corner and bearing trees. No evidence of corner was found. The corner was computed at a proportion between the North Quarter Corner Section 20 and the North Quarter Corner Section 21 using Horst's distances and holding the center line of the east-west road for north-south control. In May, a 3/4" x 24" iron rod with a MN DNR SURVEY MARKER top was set at the above location.

North Quarter Corner Section 20 - S 89 ° 58' 40" W 2711.17'
 North Quarter Corner Section 21 - N 89 ° 22' 51" E 2615.76'
 East Quarter Corner Section 20 - S 01 ° 20' 05" E 2672.29'
 East Quarter Corner Section 17 - N 01 ° 15' 33" W 2656.45'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401