

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Alvin A. Pauluk
Date: 4/5/03 License No: 17008

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:05 o'clock P.M. on the 9th day of May, 2003 A.D.

County Recorder Kathryn M. Morbey
By: de, Deputy
DOCUMENT NO. 466361

NORTH QUARTER Corner of Section 23, Township 134, Range 30, 5th P.M.

On Jan. 29, 2003 found a 3" SQUARE ALUMINUM CAP STAMPED "CASS COUNTY SURVEYOR" WITH CORRESPONDING SECTION NUMBERS 1.0 FEET ABOVE GROUND


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

decl: 5' E (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

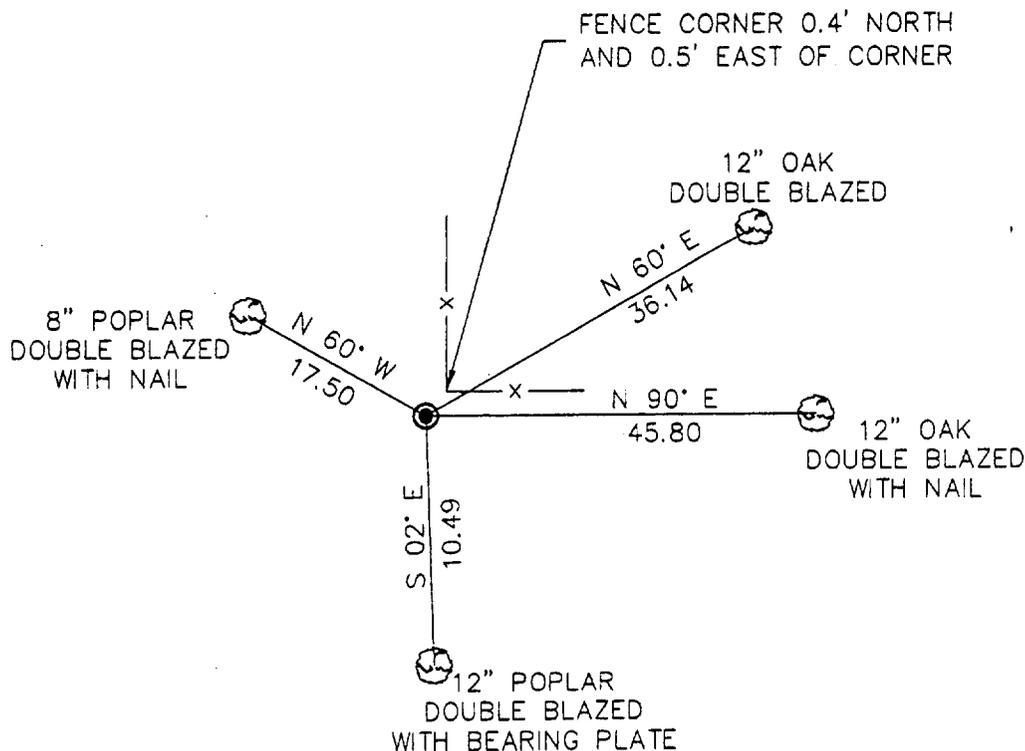

NOTE: DISTANCES SHOWN AS MEASURED TO FACE OF TREE OR TO NAIL IN SIDE OF TREE.

Statement of evidence for this corner position is on the back of this page

North Quarter corner, Section 23, Township 134 North,
Range 30 West, Cass County, Minnesota.

- 1868 Nathan Butler originally established this corner position while subdividing Township 134 North, Range 30 West. A wood post was set to mark the corner with the following witness: A 8" Oak, South 15 degrees West, 100 links.
- 1996 Landecker and Associates, Inc. found a 1/2" iron pipe with cap from Rieke, Carroll, Muller Associates, Inc. stamped "12204". Placed a 2" x 2" steel post with 3" square aluminum cap stamped "Cass County Surveyor" with corresponding section numbers over existing 1/2" iron pipe. Established the following witnesses: A 18" Poplar, North 2 degrees East, 28.10 feet; a 12" Oak, North 60 degrees East, 36.35 feet; a 18" Poplar, South 89 degrees East, 40.87 feet; a 12" Poplar, South 2 degrees East, 10.49 feet. Bearing plates were placed in the face of these four witnesses.
- 2003 Landecker and Associates, Inc. found the 3" square aluminum capped monument and the following two witnesses: A 12" Oak, North 60 degrees East, 36.14 feet; a 12" Poplar with bearing plate, South 2 degrees East, 10.49 feet. Established the following two ties: A 12" Oak, North 90 degrees East, 45.80 feet; a 8" Poplar, North 60 degrees West, 17.50 feet. This corner was accepted as the perpetuation of the original corner.