

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Alvin J. Lusk
Date: 4/5/05 License No: 17008

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:10 o'clock P.M. on the 9th day of May, 2003 A.D.

County Recorder Kathryn M. Morby
By: de, Deputy
DOCUMENT NO. 466362

NORTHEAST Corner of Section 23, Township 134, Range 30, 5th P.M.

On Jan. 29, 2003 found a 3" SQUARE ALUMINUM MONUMENT STAMPED "CASS COUNTY SURVEYOR" WITH CORRESPONDING SECTION NUMBERS


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

decl: 5° E (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

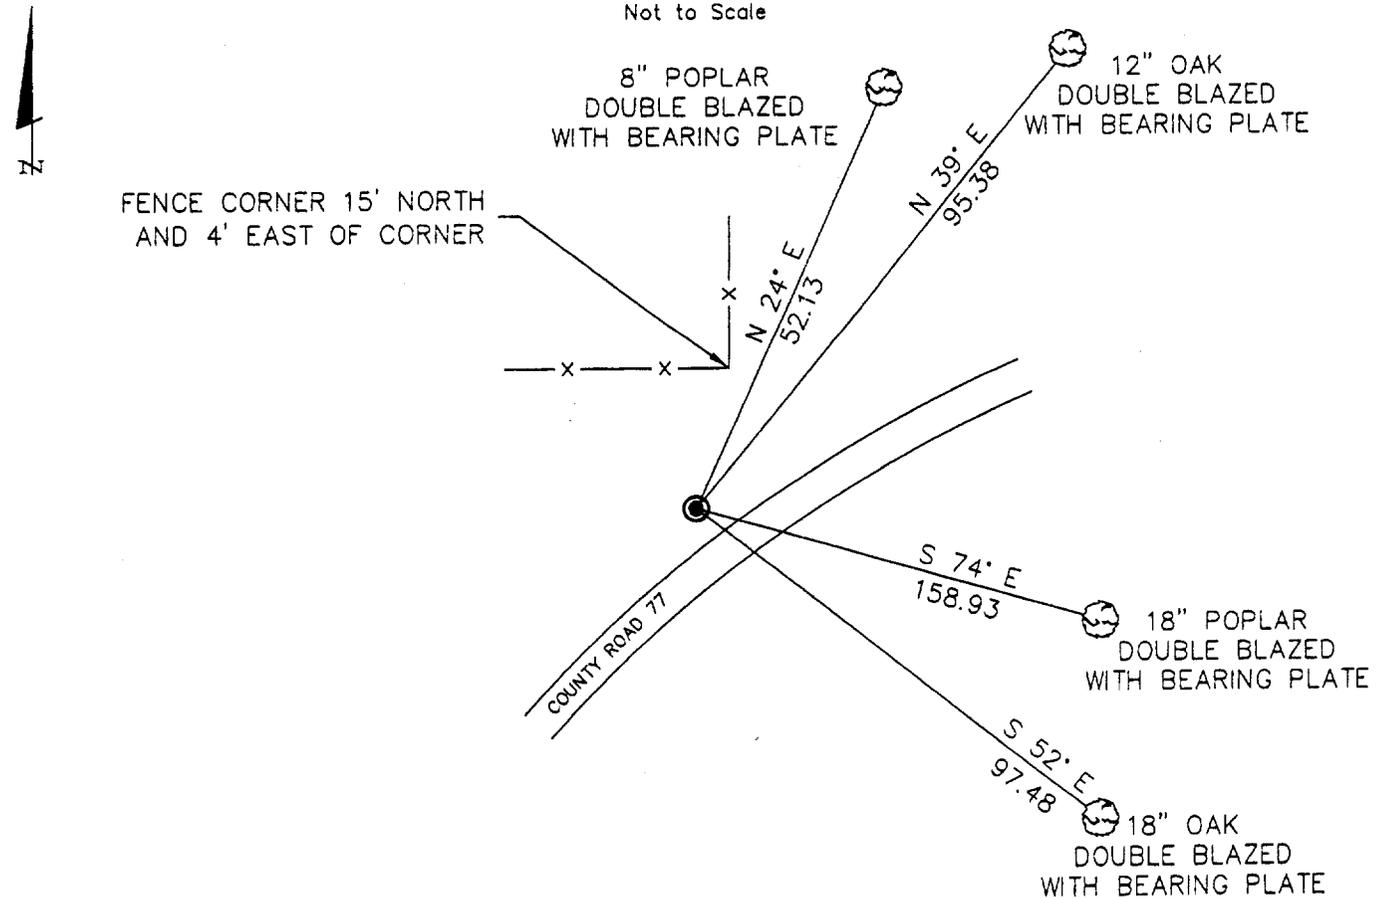

NOTE: DISTANCES SHOWN AS MEASURED TO FACE OF TREE.

Statement of evidence for this corner position is on the back of this page

Statement of Evidence

Index No. N-21

Northeast corner, Section 23, Township 134 North,
Range 30 West, Cass County, Minnesota.

- 1868 Nathan Butler originally established this corner position while subdividing Township 134 North, Range 30 West. A wood post was set to mark the corner with the following witnesses: A 22" N.Pine, North 78 1/2 degrees East, 54 links; a 20" N.Pine, South 48 degrees East, 102 links; a 24" N.Pine, South 31 1/2 degrees West, 102 links; a 24" N. Pine, South 31 1/2 degrees West, 147 links.
- 1967 County Highway Department found a 2" iron pipe.
- 1971 Dean Anderson, RLS 3091, found an iron pipe (size and type not noted). Established the following witnesses: A 5" Birch, Northwest, 91.66 feet; a 12" R. Oak, Northeast, 73.90 feet; a 6" W.Oak, 97.70 feet.
- 1985 Cass County Survey Office found a 2" iron in road ditch and the Nw and SE B.T.'s from 1971 and established the the following witnesses: A 12" W. Oak, South 50 degrees East, 97.70 feet; a 10" R.Oak, 95.85 feet; an electric junction numbered "V4414", North 19 degrees West, 21.65 feet.
- 1996 Landecker and Associates, Inc. searched the area and found no evidence of corner. With use of data from Minnesota Department of Natural Resources and information from a survey worksheet completed by Rieke, Carroll, Muller and Associates Inc. which shows the location of a 2" pipe in place. Set a 2" x 2" steel post with 3" square aluminum cap stamped " Cass County Surveyor" and corresponding section numbers. Established the following witnesses: A 8" Poplar, North 24 degrees East, 52.13 feet; a 12" Oak, North 39 degrees East, 95.38 feet; a 18" Poplar, South 74 degrees East, 158.93 feet; a 18" Oak, South 52 degrees East, 97.48 feet. Bearing plates were placed in the face of the four witnesses.
- 2003 Landecker and Associates, Inc. found the 3" aluminum capped monument and the four witnesses from the 1996 recovery. The corner was accepted as a perpetuation of the original corner position.