

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

 DAVID S. LANDECKER

Date: 8/24/04 License No: 17008

 17008

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
 DOCUMENT NO. _____

East Quarter _____ Corner of Section 36, Township 134, Range 30, 5th P.M.

On _____ found a _____

left monument as found, lowered monument, removed monument (explain)


On 03/24/04 placed a SET 1 INCH IRON PIPE WITH PLASTIC CAP 17008

deci:

SKETCH OF REFERENCE TIES

CORNER INDEX X-25

Not to Scale

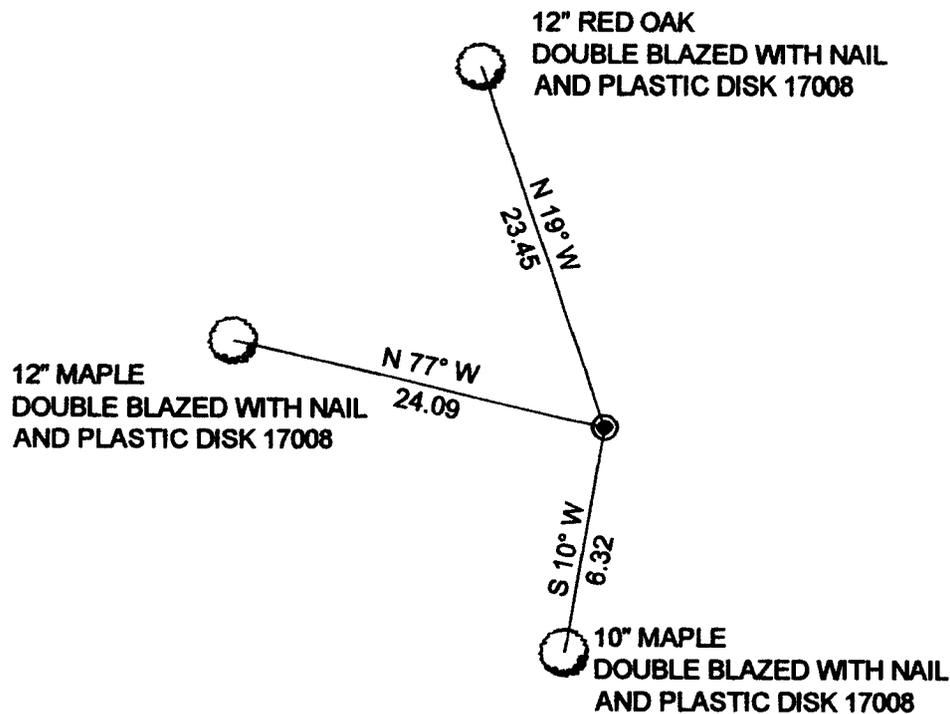

NOTE: DISTANCES SHOWN AS MEASURED TO NAIL IN SIDE OF FACE.

Statement of evidence for this corner position is on the back of this page.

Statement of Evidence: (X-25)

East Quarter Corner, Section 36, Township 134 North, Range 30 West, Cass County, Minnesota

1858 – E.N. Darling, deputy U.S. Surveyor, in accordance with U.S. Government contract, surveyed the boundaries of Township 134 North, Range 30 West, 5th Principle Meridian and was subsequently approved by the U.S. Surveyor General. Whereby the referenced Government corner was set from which:

9" Bl. Oak	S 65° W	10 Lks
8" Aspen	N 25° E	27 Lks

1972 – Robert F. Schneider RLS 5740, Cass County Surveyor, in private practice, made an extensive survey in Sections 25, 26, 35 and 36, T134N, R30W, Cass County, Mn. and in Sections 30 and 31, T134N, R29W, Crow Wing County, Mn.. Consulting with, then Crow Wing County Surveyor, Dean Anderson, RLS 3091 and referring to the records of both offices.

Notes of the field work and Corner ties are recorded Schneider's field book #33 pages 6, 9, 18, 19, 30, 31, 32 and 37. The field book, composite drawings of Section breakdowns and much of the materials used in said surveys are also on file in the Walker office of Landecker & Associates Inc..

2004 – Mark Crenshaw, surveyor with Landecker and Associates Inc., under the direction of David S. Landecker, Licensed Land Surveyor # 17008, searched extensively for evidence of the original corner and bearing trees for said Corner. Set a 1 inch iron pipe with plastic cap 17008 in the location indicated by Schneider above and the following witnesses established:

10" Red Oak	N 77° W	24.09 Feet
12" Red Oak	N 10° W	23.45 Feet
10" Maple	S 10° W	6.32 Feet

A000488143

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
08/24/2004 12:30:01PM

AS DOC #: A000488143
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby DEPUTY
HW