

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 TERRY L. FREEMAN

Date: 4/11/05 License No: 21367

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
 DOCUMENT NO. _____

WITNESS CORNER TO MEANDER CORNER #48 Corner of Section 7,8, Township 142, Range 31, 5TH P.M.


- On 4/11/05 found a 1 1/2 INCH IRON PIPE DOWN 3 INCHES±
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. G-H-5

Not to Scale

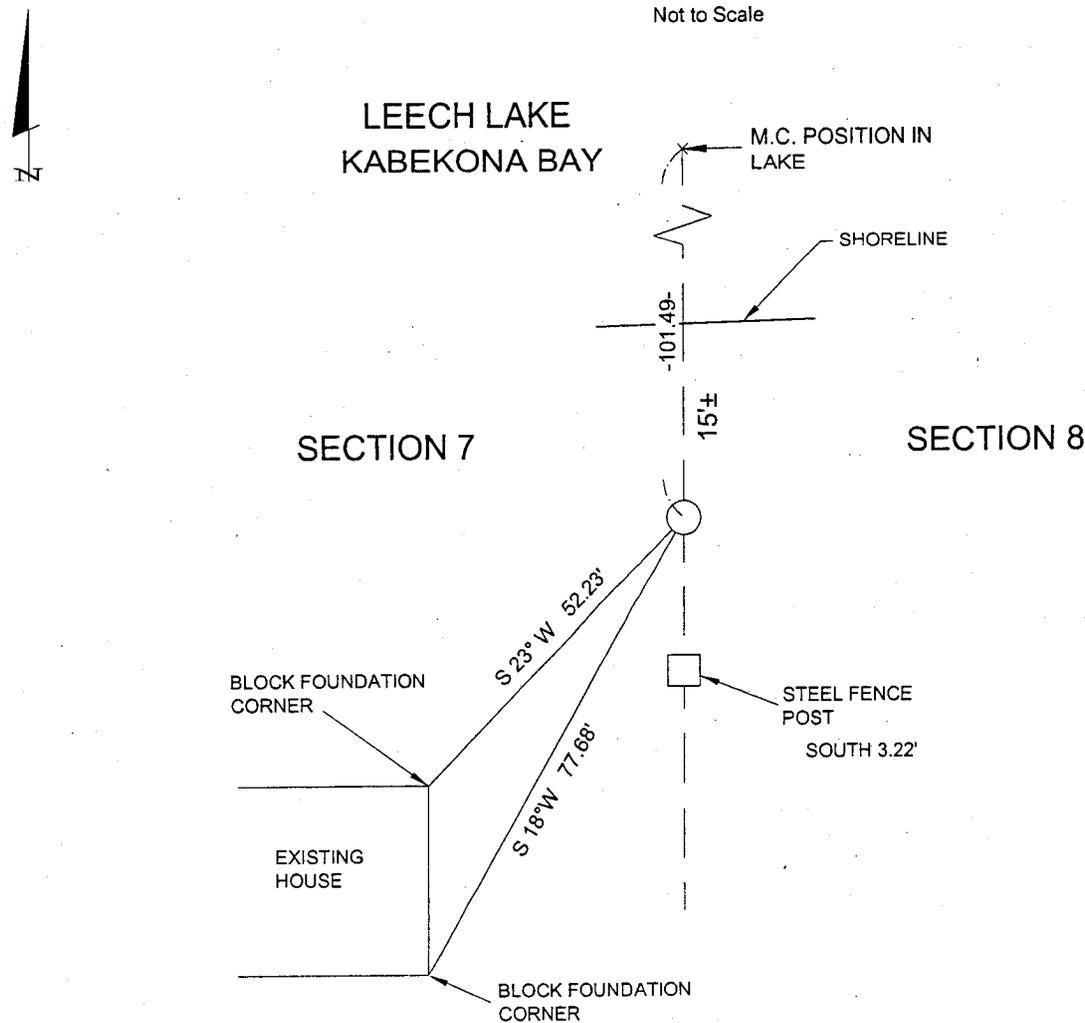

Statement of evidence for this corner position is on the back of this page

Witness Corner to Meander Corner #48, Section 7, 8,
Township 142 North, Range 31 West, Cass County,
Minnesota

- 1873 P.H. Conger, U.S. Deputy Surveyor, originally established this Meander corner position while surveying the interior subdivision lines of Township 142 North, Range 31 West. A wood post was set for the Meander corner position with the following witnesses: A 4 inch Balsam, North 68 degrees East, 23 links; A 7 inch Black Ash, South 21 degrees West, 20 links.
- 1915 John Curo, Cass County Surveyor, found that the original Meander corner position now fell in the lake. He set a 2 ¼ inch by 48 inch iron monument as a witness corner to the Meander corner. Recorded as County Resurvey Plat E-57.
- 1927 A survey by John Greene, recorded as County Resurvey Plat E-58, shows an iron monument.
- 1968 R.F. Schneider, RLS#5740, set an iron monument for the Meander corner position.
- 1986 Walter Curo, RLS#11395, found the iron monument set by Schneider and accepts it as the Meander corner position.
- 1997 A Landecker and Associates, Inc. survey crew found a 1 ½ inch iron pipe set by R.F. Schneider and accepts it as a witness to the Meander corner position.
- 2005 A Landecker & Associates, Inc. survey crew found the 1 ½ inch iron pipe down ±3 inches and established the following witnesses: A steel fence post, South 3.22 feet; the Northeast Foundation corner of an existing house, South 23 degrees West, 52.23 feet; the Southeast Foundation corner of an existing house, South 54 degrees East, 90.38 feet.

A000497250
 OFFICE OF COUNTY RECORDER
 CASS COUNTY MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON
 04/15/2005 12:29:17PM

AS DOC #: A000497250
 PAGES: 2
 REC FEES: \$0.00

KATHRYN M. NORBY
 COUNTY RECORDER

BY Kathryn M. Norby DEPUTY