

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

[Signature]

Date: 5/19/05 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO. _____

NORTHEAST Corner of Section 35, Township 140, Range 27, 5TH P.M.

On _____ found a _____

left monument as found, lowered monument, removed monument (explain)


On 5/2/05 placed a 3/4 INCH IRON PIPE WITH PLASTIC CAP

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. V-21

Not to Scale

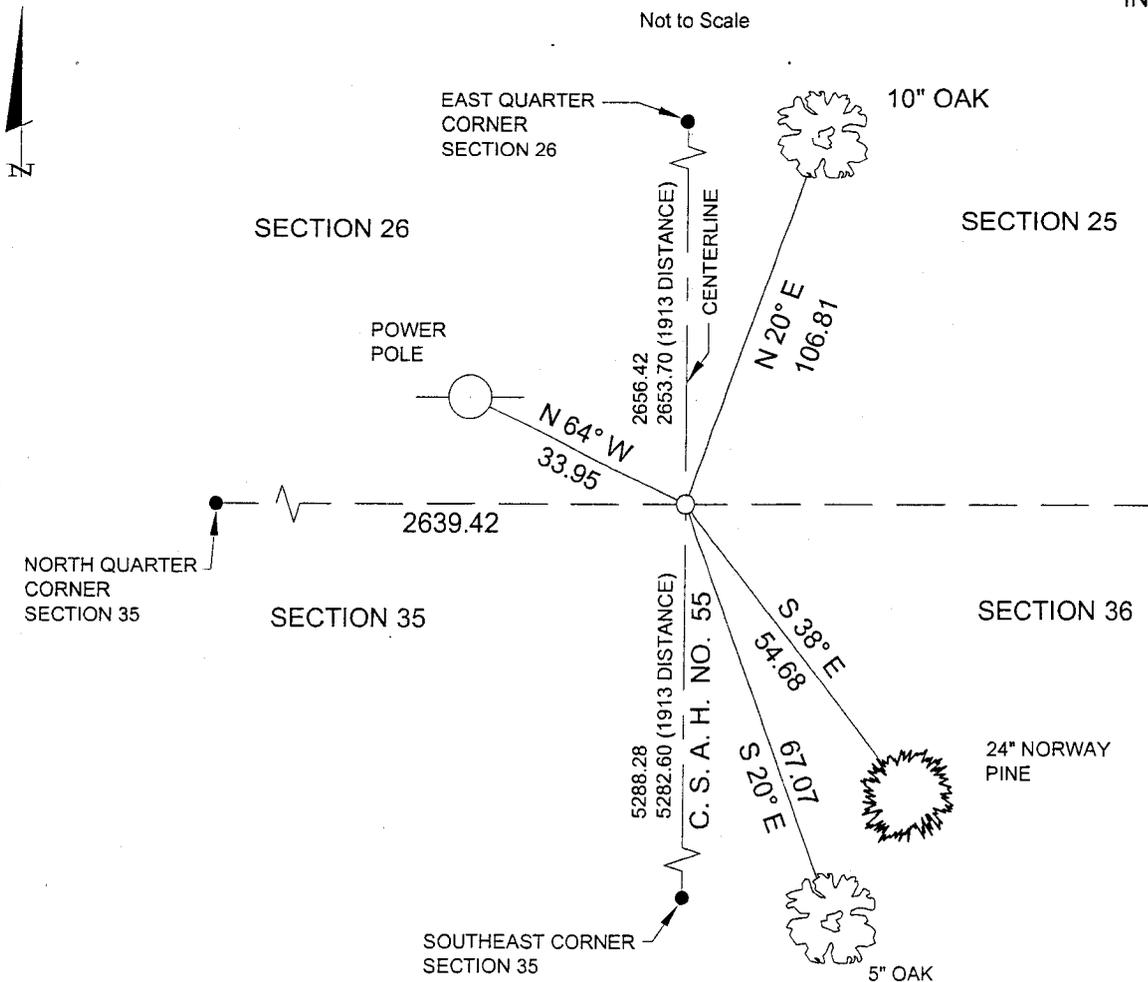

ALL DISTANCES ARE HORIZONTAL TO
DOUBLE-HEADED NAIL AT BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. V - 21.

Northeast Corner, Section 35, Township 140 North,
Range 27 West, Cass County, Minnesota.

- 1871 Fendall G. Winston, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 140 North, Range 27 West. A wood post was set for the corner position with the following witnesses: An 8 inch Birch, North 59 degrees West, 12 links; A 12 inch White Pine, North 64 degrees East, 11 links; A 12 inch Aspen, South 47 degrees West, 22 links; A 6 inch White Pine, South 17 degrees East, 31 links.
- 1913 Harry S. Todd, Deputy County Surveyor of Cass County, found the Southeast bearing tree fallen but plainly marked and the stumps of the other original bearing trees. A 3x3x24 inch stake was set over the old stake and the following witnesses were established: A Pine Stub, North 35 degrees East, 52.50 feet; A 4 inch Norway Pine, North 35 degrees 53 minutes West, 38.85 feet; A 3 inch Norway Pine, South 53 degrees 45 minutes West, 41.00 feet; A 3 inch Norway Pine, South 47 degrees 36 minutes East, 55.05 feet.
- 1991 A Landecker & Associates, Inc. survey crew searched for and found no evidence of the Section corner position or bearing trees.
- 2005 A Landecker and Associates, Inc. survey crew searched again for corner evidence and located corners North and South along with the road centerline. Distances match well with the 1913 Todd survey. At the obliterated position using the road centerline and proportional distance North and South, they set a 3/4 inch iron pipe with plastic cap to mark the Section corner position. The following witnesses were established: A 10 inch Oak, North 20 degrees East, 106.81 feet; A 24 inch Norway Pine, South 38 degrees East, 54.68 feet; A 5 inch Oak, South 20 degrees East, 67.07 feet; A Power Pole, North 64 degrees West, 33.95 feet.

A000509695
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON
 02/08/2006 11:46:34AM

AS DOC #: A000509695
 PAGES: 2
 REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby
 HV DEPUTY