

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA CONTAINED HEREIN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

Ronald L. Carnell Sr. Aug. 15, 2005

RONALD L. CARNELL SR.
MN PLS NO. 43415


- LAND SURVEYOR PROFESSIONAL ENGINEER
- COUNTY SURVEYOR COUNTY ENGINEER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WC to MC#13 CORNER OF SECTION 16, TOWNSHIP 143N, RANGE 31 W, 5TH PRINCIPAL MERIDIAN
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:
ON JAN 19, 2005 FOUND A(N) GLO BRASS MONUMENT IN PLACE
 LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
ON _____, 2005 PLACED A(N) _____

SKETCH OF
REFERENCE TIES

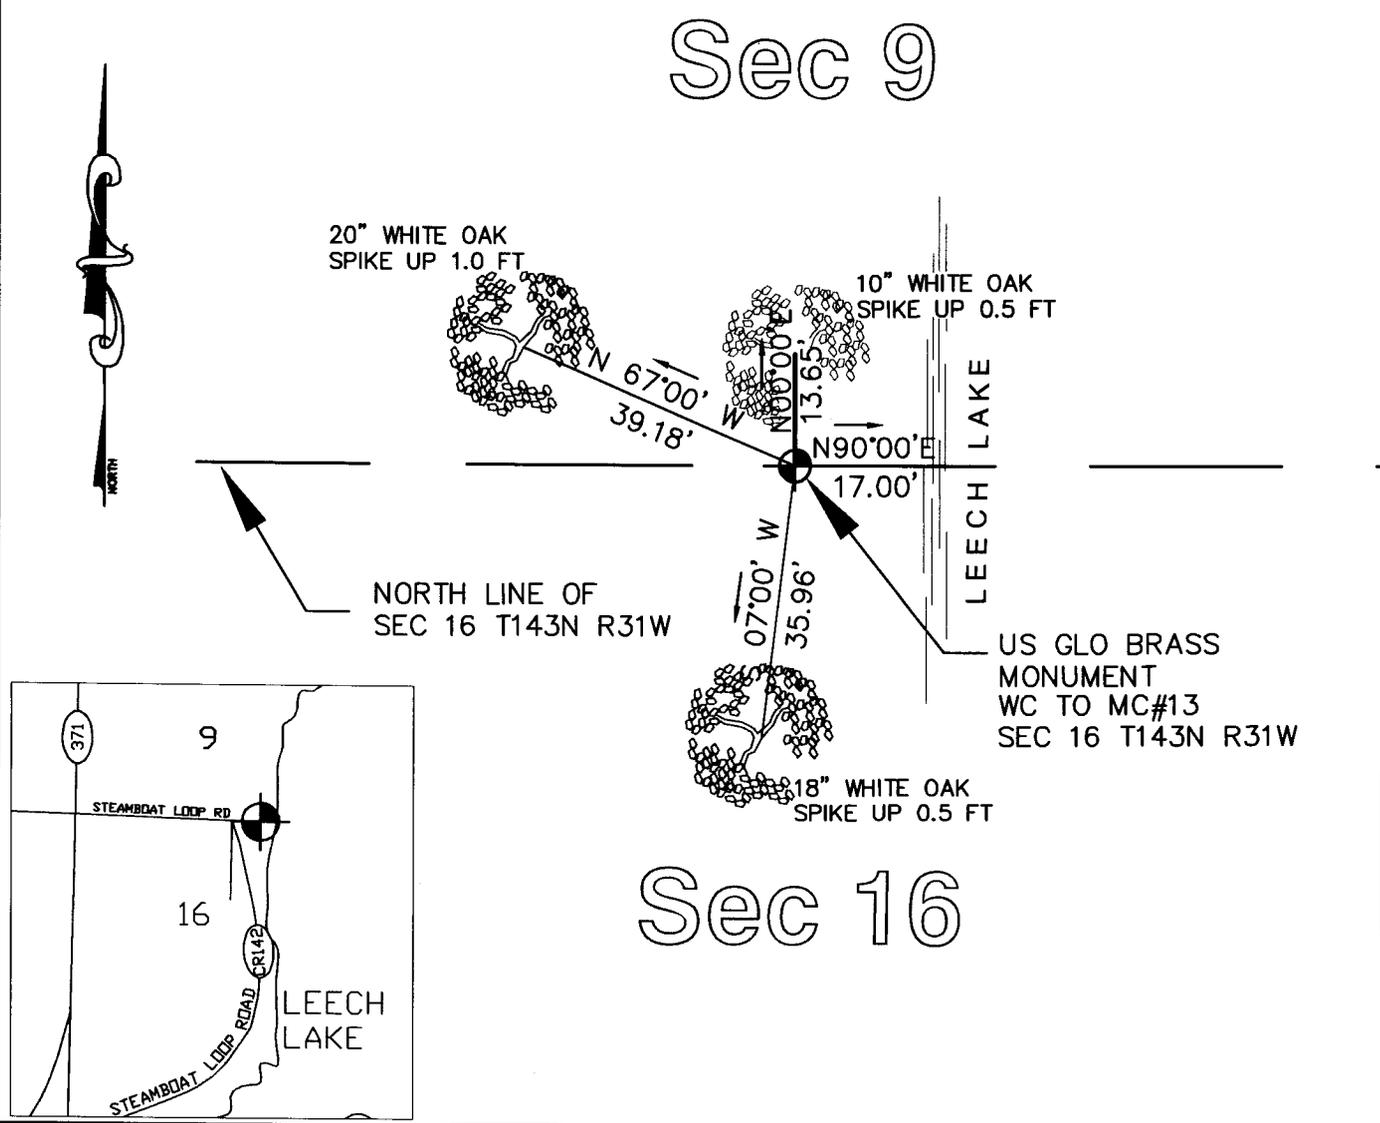

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

Statement of Evidence

Witness Corner for M.C. No. 13, Section 16, Township 143 North Range 31 West

The original corner was established and monumented by the General Land Office. In 1919 a 36"x1" iron post with brass cap marked was set 27.65 chains east of the Quarter Corner and 2.28 chains west of Meander Corner No. 13. The witness corner was Referenced to two bearing trees described as follows: A 24" white oak bears S 60 degrees W-48 links and a white oak 28" bears N 46 1/2 degrees W-57 links.

On May 24, 1976, the D.N.R. Engineering Bureau contacted the Cass County offices of Recorder, Auditor, Engineer, Surveyor and the Minnesota Department of Transportation.

A Plat of Survey in Government Lot 5, Section 9, Township 143 North Range 31 West recorded on May 31, 1966, by R.F. Schneider, R.L.S., is tied into the corner for a survey of the South 250 feet of Government Lot 5 lying Easterly of the Railroad.

It seems quite obvious to the D.N.R. that the monument has been moved West as the 1976 distance between the Quarter Corner and the Witness Corner is 1808.59 verses the 1919 G.L.O. distance of 1824.9. The D.N.R. measured 16.31 feet East of the W.C. to the probable tied original monument location; then measured S 60 degrees W 48 links to a scarred white oak which looks to be the 1919 B.T. Due to the shifting waters edge of Leech Lake, the monument has undoubtedly been moved West by someone. But it is on the East-West fence line

On January 19, 2005 Emmons and Olivier Resources located the corner. After analysis of all information the corner was accepted as marking the location.

A000509702

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
02/08/2006 11:46:41AM

AS DOC #: A000509702
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby DEPUTY
HIV