

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 17, Township 135, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,     lowered monument,     removed monument (explain)
- On 7/7/98 Placed a 3/4" X 18" Iron rod with plastic cap marked "DNR Survey  
DATE Marker", down 0.2'

### SKETCH OF REFERENCE TIES

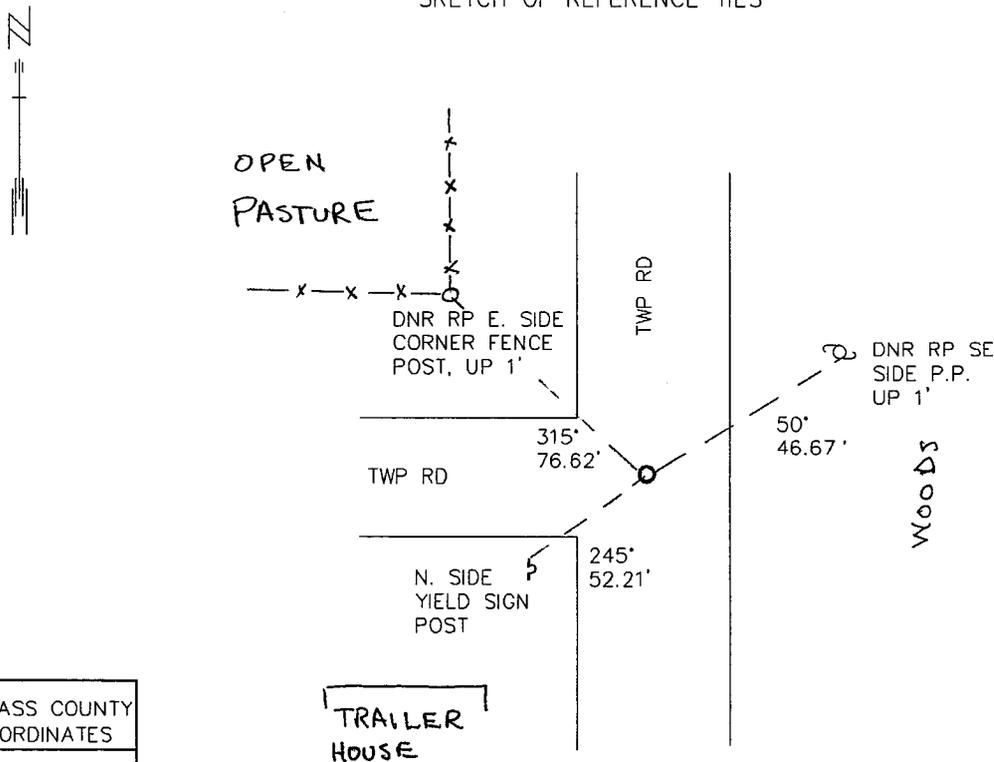

CASS COUNTY COORDINATES  
N 230644.93  
E 497676.49

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

2/18/2000  
FOM01856

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker      4/30/07  
SIGNATURE      DATE

License Number 16098

- Land Surveyor,     Professional Engineer  
 County Surveyor,     County Engineer

OFFICE OF THE COUNTY RECORDER  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19\_\_\_\_

County Recorder \_\_\_\_\_  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

**Northeast Corner Section 17, Township 135 North, Range 30 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
 Cass County Surveyor  
 Widseth, Smith and Nolting of Brainerd  
 Landecker and Associates of Pequot Lakes  
 Landecker and Associates of Walker  
 Central Minnesota Surveying

1869 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Maple 10" S 40° E 23 links (15.18')  
 Oak 7" N 50° E 18 links (11.88')  
 Oak 5" N 68° W 27 links (17.82')  
 Oak 6" S 25° W 10 links (6.60')

???? The survey of State Rural Highway No. 80 shows stationing at this corner. The distance to the East Quarter Corner Section 17 is 2607.8', to the East Quarter Corner Section 8 is 2593.9' and to the Northeast Corner Section 8 is 5233.2'.

1914 John Curo found a stone in the centerline of the road set in place of stake set years ago by Co. Surveyor B.B. Bartlett. No bearing tree evidence could be found.

1998 In February, the DNR survey crew located the centerline intersection of roads north-south and west. The approximate quarter corner (centerline road and fence south) to the west, the centerline of the north-south road to the east, the quarter corner to the south and the section corner to the north were located. Using the GLO proportion between the corners fit the centerline intersection. In July, a hole 2' square and 3.5' deep was dug at the intersection, but nothing was found. A MNDNR Survey Marker was set at the intersection to mark the obliterated location of the corner and ties taken. Distances were measured to the following corners:

East Quarter Corner Section 17 - S 00°12'01"E 2612.57'  
 Approx. North Quarter Corner Section 17 - S 88°04'33"W 2632.94'  
 Northeast Corner Section 16 - S 89°49'06"E 5224.03'  
 Northeast Corner Section 8 - N 00°12'19"W 5225.14'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

A000549044

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
05/12/2009 03:29:18PM

AS DOC #: A000549044  
PAGES: ~~X~~ 3 *mw*  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY *Kathryn M Norby* DEPUTY  
*mw*