

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 29, Township 135 N, Range 31 W, 5TH P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 08/10/08 found a 3/4" iron rod with MNDNR cap
Date
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
Date



SKETCH OF REFERENCE TIES

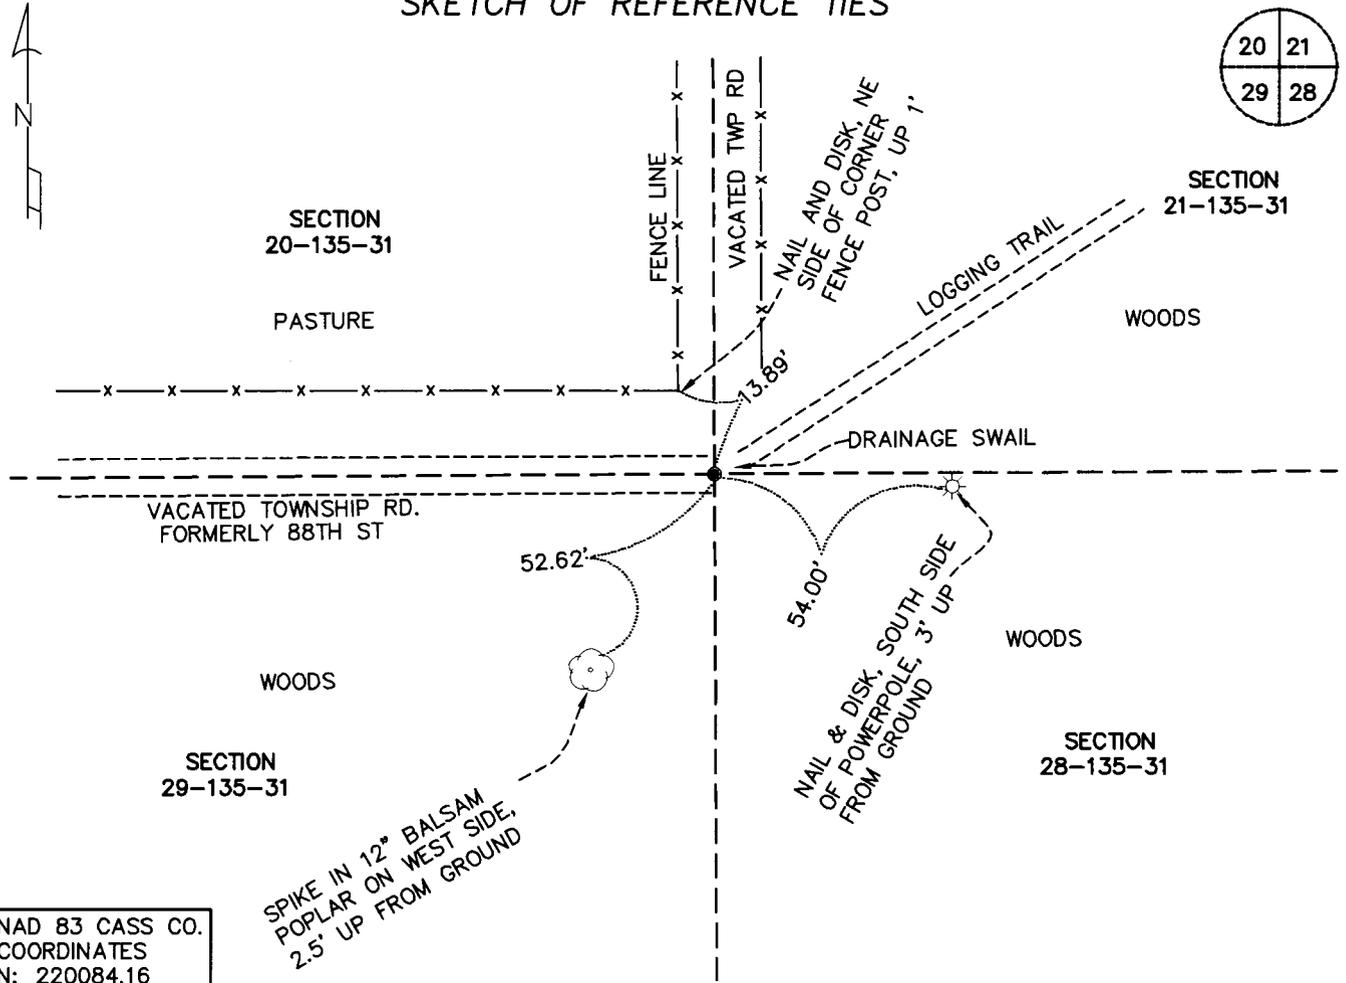

NAD 83 CASS CO. COORDINATES
N: 220084.16
E: 465620.15

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Timothy D. Larson 6/28/10
Timothy D. Larson, PLS Date

Registration No. 43809

- Land Surveyor Professional Engineer
- County Surveyor County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorders office at _____ o'clock ____ M. on the _____ day of _____, 20____.

County Recorder _____

Document Number _____

Statement of Evidence:

Northeast Corner of Section 29, Township 135 North, Range 31 West,
Meadowbrook Township, 5th Principal Meridian, Cass County, Minnesota.

1870

The original government survey for the subdivision lines were ran by Richard Cronk and the original notes show a wood post set with the following bearing trees:

| | | |
|-----------|-----------|----------|
| 12" ELM | N 57° E | 85 Links |
| 8" ELM | S 84° W | 57 Links |
| 7" ELM | N 53° W | 23 Links |
| 6" W. ASH | S 64.5° E | 87 Links |

1998

John D. Walker, PLS # 16098 notes the Dept of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Assoc of Pequot Lakes
Landecker and Assoc of Walker
Central MN Surveying

The DNR survey crew searched for this corner at the intersection of old roads west and north. No monument was found. A MNDNR Survey Marker was set at the intersection and was accepted as the obliterated location of the corner. For more information on this survey in this area contact MN DNR, Bureau of Engineering, Survey Section, 1601 MN Drive, Brainerd, MN 56425.

September 10, 2008

Timothy D. Larson, PLS # 43809, while surveying in Section 29 found a 3/4" capped rod set by the MNDNR in July of 1998. The reference ties from the previous certificate of location prepared by John Walker were either slightly moved due to swampy ground or obliterated. We were confident this was the same monument set in 1998. We accepted the location as previously certified and measured new reference ties.

A previously recorded Certificate of Location prepared by John Walker, recorded as Doc. No. 441851, was utilized as evidence.

A000561671
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
07/07/2010 3:25:18 PM
AS DOC #: A000561671
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER