

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH-1/4 Corner of Section 29, Township 136, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On 5/4/12 found FOUND IRON PIPE WITH RLS# 11865 FLUSH WITH BITUMINOUS

left monument as found, lowered monument, removed monument (explain)

On _____ PLACED _____
DATE

SKETCH OF REFERENCE TIES

SECTION 20

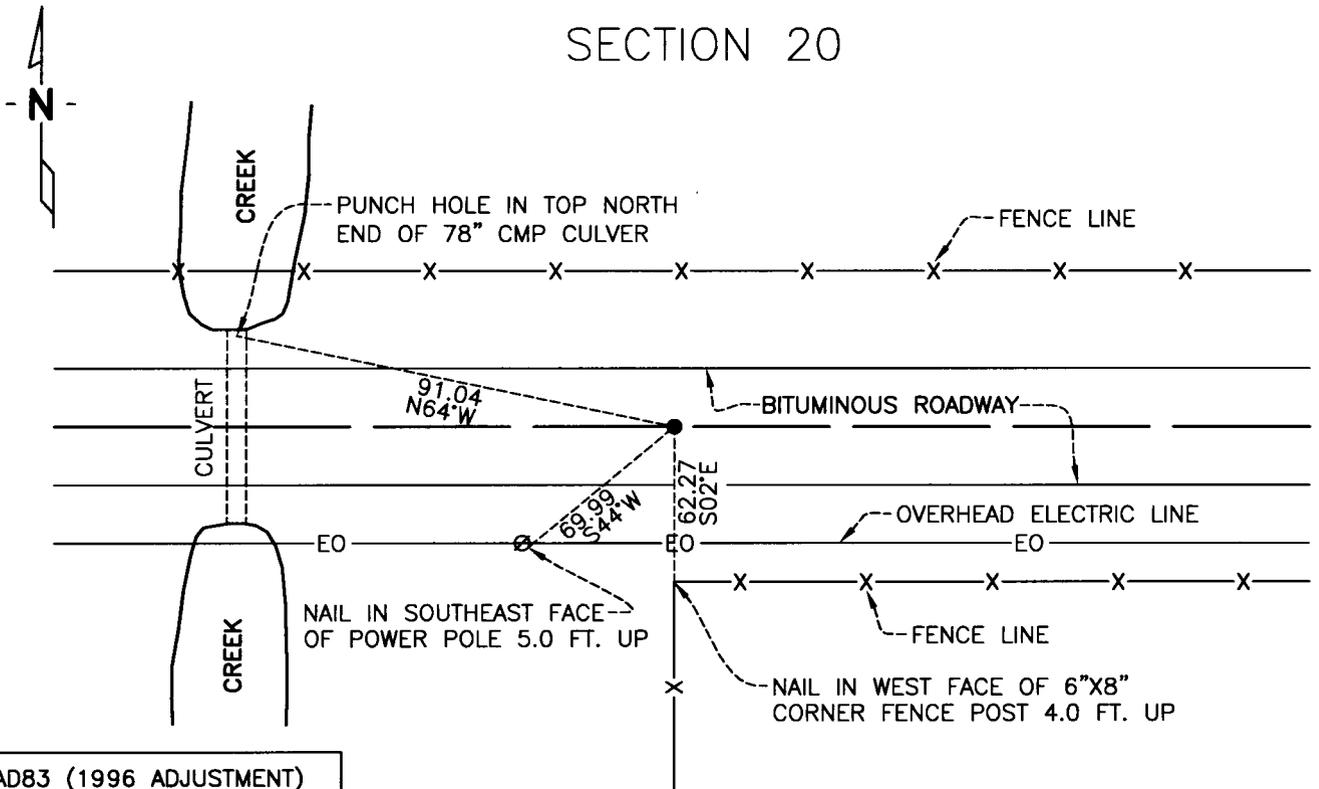

NAD83 (1996 ADJUSTMENT)
CASS COUNTY SOUTH DATUM

N= 251,723.809
E= 494,866.502

SECTION 29

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Craig Johnson 05/15/2012
SURVEYOR DATE
CRAIG JOHNSON
Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____



Statement of Evidence:**North Quarter corner of Section 29, Township 136 North, Range 30 West**

- Oct. 1870 R. Cronk, GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:
7" Aspen S60°E 175 links (116.73 feet)
- Oct 1870 R. Cronk measured 1.53 chains (100.98 feet) between the N 1/4 corner of Section 29 to the west edge of a creek 25 links wide to the west of the corner. (According to GLO notes).
- 19?? James M. Canfield (County Surveyor) measured 5253 feet between the NW and NE corners of section 29. (He makes no mention of the N 1/4 corner of section 29. (Road Calendar A, Page 68)
- 2001 James Nielsen, LS 11865, while surveying in Section 29, set this corner at the intersection of the centerline of the road and a north/south fence line.
- Jan. 2004 John Walker, LS 18098, used Nielsen's position for the North 1/4 corner of Section 29 during a survey of the Stoney Brook Fisheries Management Area for the Minnesota DNR, (DNR file no. FMA00508).
- May 2012 Craig E. Johnson, LS, CFedS, 44530, while surveying in Section 32, found Nielsen's 1/2" pipe capped 11865, Johnson accepted Nielsen's pipe as the corner and set reference ties as depicted on the face of this certificate. (Johnson measured 100+/- feet from the corner to the west edge of a creek (GLO notes meas. 100.98 feet)

A000580964
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
05/31/2012 10:45:04 AM
AS DOC #: A000580964
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER