

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Ref. to Meander Corner #31 of Section 20, Township 143 N., Range 25 W., 5th P.M.
 State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 12-03-2012 found a 2-1/2" iron pipe with a 3" cap, 20" above ground level.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES (NOT TO SCALE)

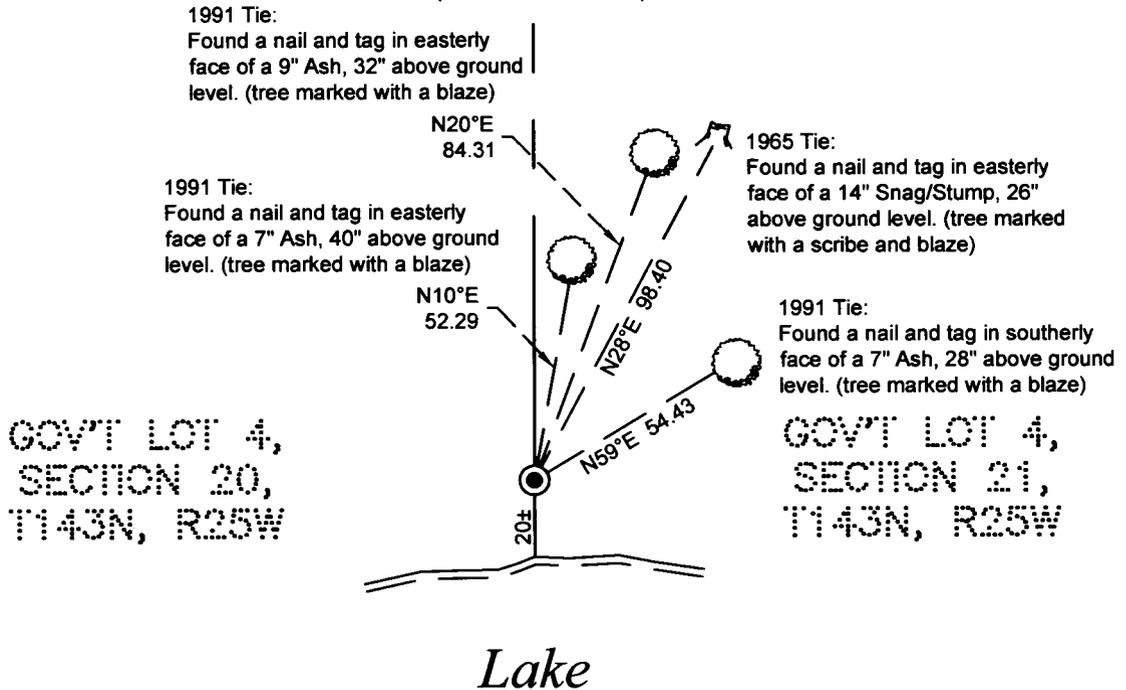

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this united States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 1/2/13

MN License No. 21367



A000589941

**OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON**

2/26/2013 8:25:08 AM

AS DOC #: A000589941

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR Dep

STATEMENT ON EVIDENCE

Reference Monument to Meander Corner 31 of Sections 20 & 21, Township 143 North, Range 25 West of the 5th Principal Meridian.

In 1872, Hayward & Griffin, U.S. Deputy Surveyors set a wood post to mark the corner location and established bearing tree as follows: a 3" Spruce N 28° E 315 links.

In 1900, U.S. Army Corp of Engineers map of the Pokegama Reservoir shows corner found by Surveyor Horace Dunaway. A copy of the map is on file in the Cass County Survey Department.

In 1913, Cass County Surveyor's Record #239, Book B, pages 4-11, shows a survey by John Curo. He found remains of the original BT and set a post on the shore on a projected line from the NE Corner through the East Quarter corner.

In 1965, In November, James Ekstrom, U.S. Forest Service personnel, searched for corner and found a 2" iron pipe. In December, William Okerman, USFS Surveyor set a 2"x60" iron pipe with stamped brass Cap and witnesses: 17" White Pine N 28° E 98.4 feet and 6' long steel sign post N 88° W 5.5 feet. In 1979, Milo Stefan, USFS Surveyor filed a Certificate of Location of Government Corner as Doc. # 246211. In 1989, Rob Main, USFS personnel, used this corner as part of a survey in Section 28. Information on file in the U.S.F.S. Cass Lake Office T143N R25W Book 2, page 24.

In 1976, Louis D. Gilbert, U.S. Surveyor for the BLM, made a dependent resurvey of part of the township and found the 2"x60" iron pipe for the meander corner and the 1965 Pine BT. Information on file in the Cass County Surveyors Office.

In 1988, Gary Stevenson, RLS #12684, performs a survey in Section 20 and shows a found USFS monument.

In 1991, Walter E. Curo, RLS #11395, found a brass cap monument and files a Certificate of Location of Government Corner as a reference Monument for the Meander Corner.

In 1996, Terry L. Freeman, (Landecker & Assoc.) RLS #21367, performs a survey in Section 20 and shows a found USFS monument.

In 1998, Terry L. Freeman, (Landecker & Assoc.) RLS #21367, plats VERMILLION LAKE ACRES and shows a found USFS monument.

In 2007, Milo E. Stefan, RLS #12261, performs a survey in Section 20 and shows a found USFS monument.

In 2009, Laverne Leuelling, (Northern Lights Surveying & Mapping) RLS #16089, performs a survey in Section 20 and shows a found USFS monument.

On December 3, 2012, a Northern Engineering & Consulting survey crew found the 3" capped USFS monument and the snag/stump of the 1965 BT and (3) 1991 ties as shown on front of this certificate. I accept the found USFS monument as a perpetuation of the reference monument to the original meander corner.

County Coordinates (Cass County North)

Northing 237641.260
Easting 588678.768