



A000591537

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/15/2013 10:53:07 AM

AS DOC #: A000591537

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Signature: James Kramer
James Kramer

Date: 3-19-2013

Reg. No. 23668

NAD 1996 (HARN) CASS COUNTY COORDINATES
N= 238335.155 E= 426149.352

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. C-5, East Quarter CORNER OF SECTION 6, TOWNSHIP 135, RANGE 32,
STATE OF MINNESOTA, COUNTY OF CASS


AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON _____ DATE FOUND A(N) _____
- LEFT MONUMENT AS FOUND. LOWERED MONUMENT. REMOVED MONUMENT (EXPLAIN)
- ON 3-19-2013 DATE PLACED A(N) 60"x1/2" capped pipe, up 1.0'

SKETCH OF REFERENCE TIES

Magnetic Declination Assumed 6°30'
Sketch Not to Scale

MONUMENT MARKED:

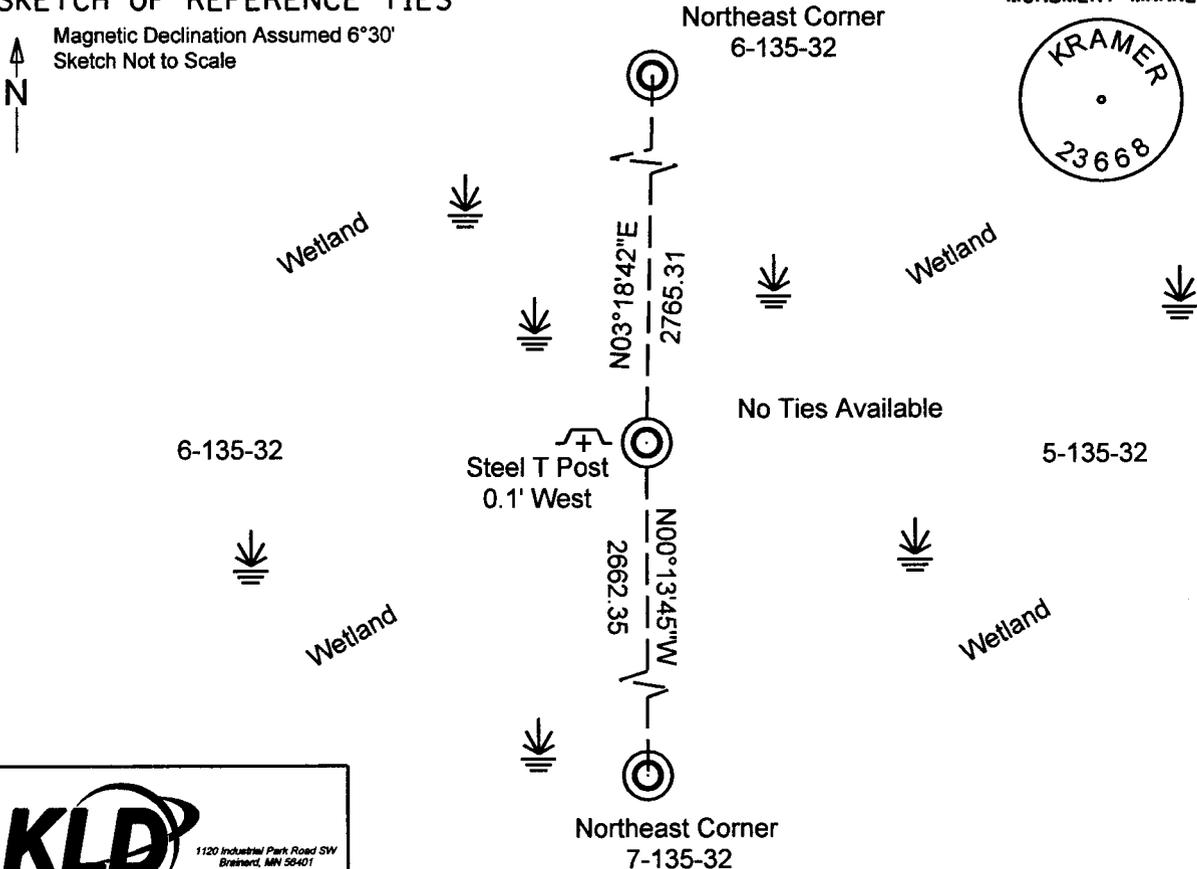

KLD
1120 Industrial Park Road SW
Brainerd, MN 56401
218-829-6333

KRAMER LEAS DELEO
SURVEYING • ENGINEERING • PLANNING
BRAINERD ST. CLOUD

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

Page 1 of 2
A000591537





Index No. C-5

Statement of Evidence

East Quarter Corner of Section 6, T135N, R 32 W, Cass County, Minnesota

- 1866 The Original Government Survey was run and a post was set to mark the corner. Ties were made to two Tamarack.

- 1962 The Minnesota Department of Natural Resources while completing survey work in the area assumed the corner position at a fence intersection. Notes indicate an iron pipe being set.

- 2012 The Minnesota Department of Natural Resources while completing survey work in the area did not recover the iron pipe set in 1962. The corner position was held at the 1962 position. No monument was set.

- 2013 Crews from Kramer Leas Deleo searched the area and found no evidence of the corner or accessories, a steel T-post was recovered at the previous DNR position. A 60" x 1/2" pipe with RLS cap 23668 was set at the location previously computed by the DNR in 1962, and held in 2012. The area of the corner is wetland with small willow brush, no bearing ties were available.

- 2013 On February 19, 2013, James Kramer, PLS #23668, analysis of record and survey information indicates the set 1/2" pipe to be the perpetuation of the original corner.