



A000592108

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/2/2013 11:50:39 AM

AS DOC #: A000592108

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER
BY SR _____ Dep

Page 1 of 2 A000592108


Index No. J-13

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 16, Township 134, Range 32
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE _____
- left monument as found, lowered monument, removed monument (explain)
- On 5/16/11 Placed a 1" X 48" INSIDE DIAMETER IRON PIPE WITH CAP STAMPED
DATE
"MN DNR LS 47461" UP 0.5' ON FIELD AND WOODS DIVISION

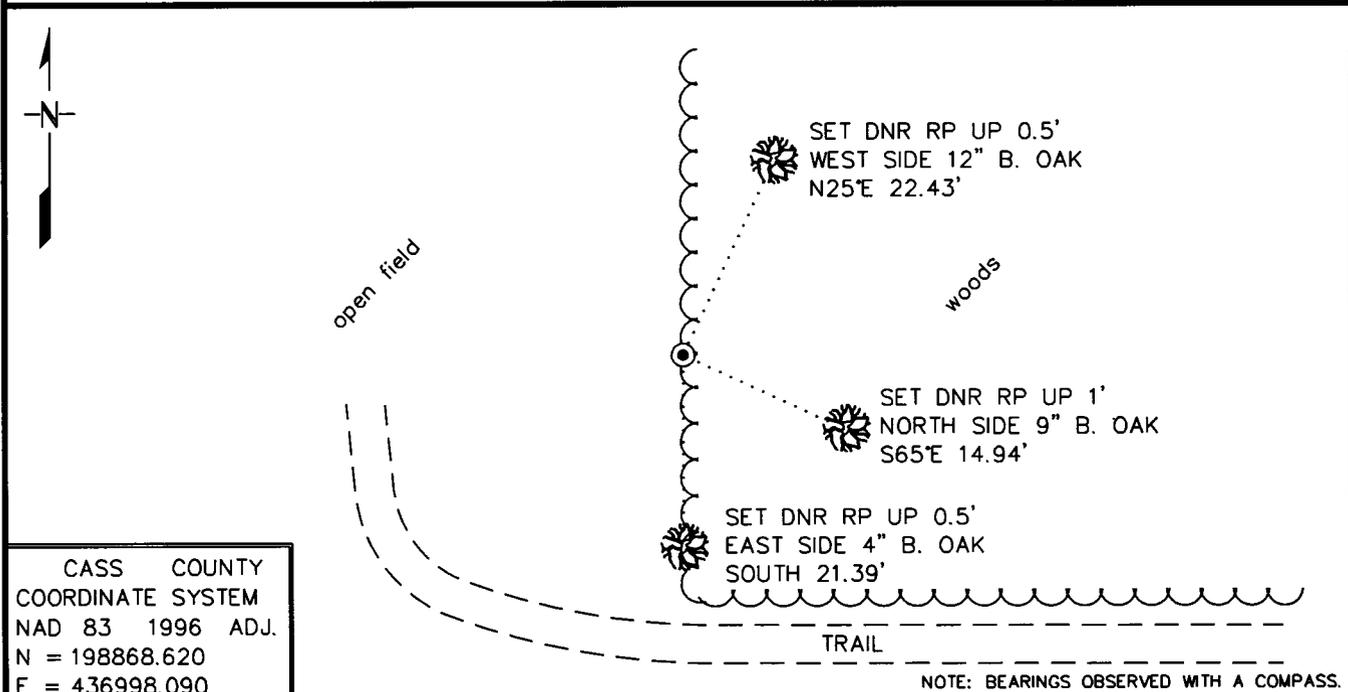

Statement of evidence for this corner location is on back of this page.

RAL - JUNE 2011
FOM01910.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE *Kathryn M. Norby* DATE 4/24/13 License Number 47461

Title: Land Surveyor County Surveyor

STATEMENT OF EVIDENCE**Northeast Corner of Section 16, Township 134 North, Range 32 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

Cass County Recorder
 Cass County Surveyor
 Cass County Highway Dept.
 Westwood Professional Services - Brainerd
 Carnell Land Surveying, LLC
 Arro of Park Rapids, LLC
 Nyberg Surveying
 Festler Land Surveying
 Kramer Leas Deleo, PC
 Widseth Smith Nolting - Baxter

1870 This corner was established by the Government Land Office. A post was set to mark the corner and was witnessed by the following bearing trees:

Aspen	5"	N25°W	192 Links
Pine	4"	N72°E	180 Links
Pine	6"	S41°E	206 Links

The DNR did not find any other records pertaining to this corner.

2011 In May, the DNR survey crew made a search for evidence of the corner and located a north-south field and woods occupation line in the vicinity of the corner location. This is a long term occupation line as supported by 1939 air photos of the area. No other evidence of the corner was recovered. Using the occupation line as evidence of the corner location, the corner was computed on the occupation line and proportionally between the northeast corner of Section 9 and the northeast corner of Section 28. This position was accepted as the corner and a 1" x 48" inside diameter iron pipe with cap stamped "MN DNR LS 47461" was set to mark the corner location.

Northeast Corner Section 9 bears N00°52'32"W 5338.86'
 Northeast Corner Section 15 bears N89°37'46"E 5200.47'
 Northeast Corner Section 28 bears S00°20'47"E 10677.62'
 East Quarter Corner Section 16 bears S00°06'19"E 2669.43'
 North Quarter Corner Section 16 bears S89°37'07"W 2680.73'

For more information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

