

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/4 Corner of Section 7, Township 139, Range 31, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 09-03-09 placed a 5/8 rebar at the corner with a yellow plastic cap stamped "MN LS 40035" in a gravel road surface.

SKETCH OF REFERENCE TIES

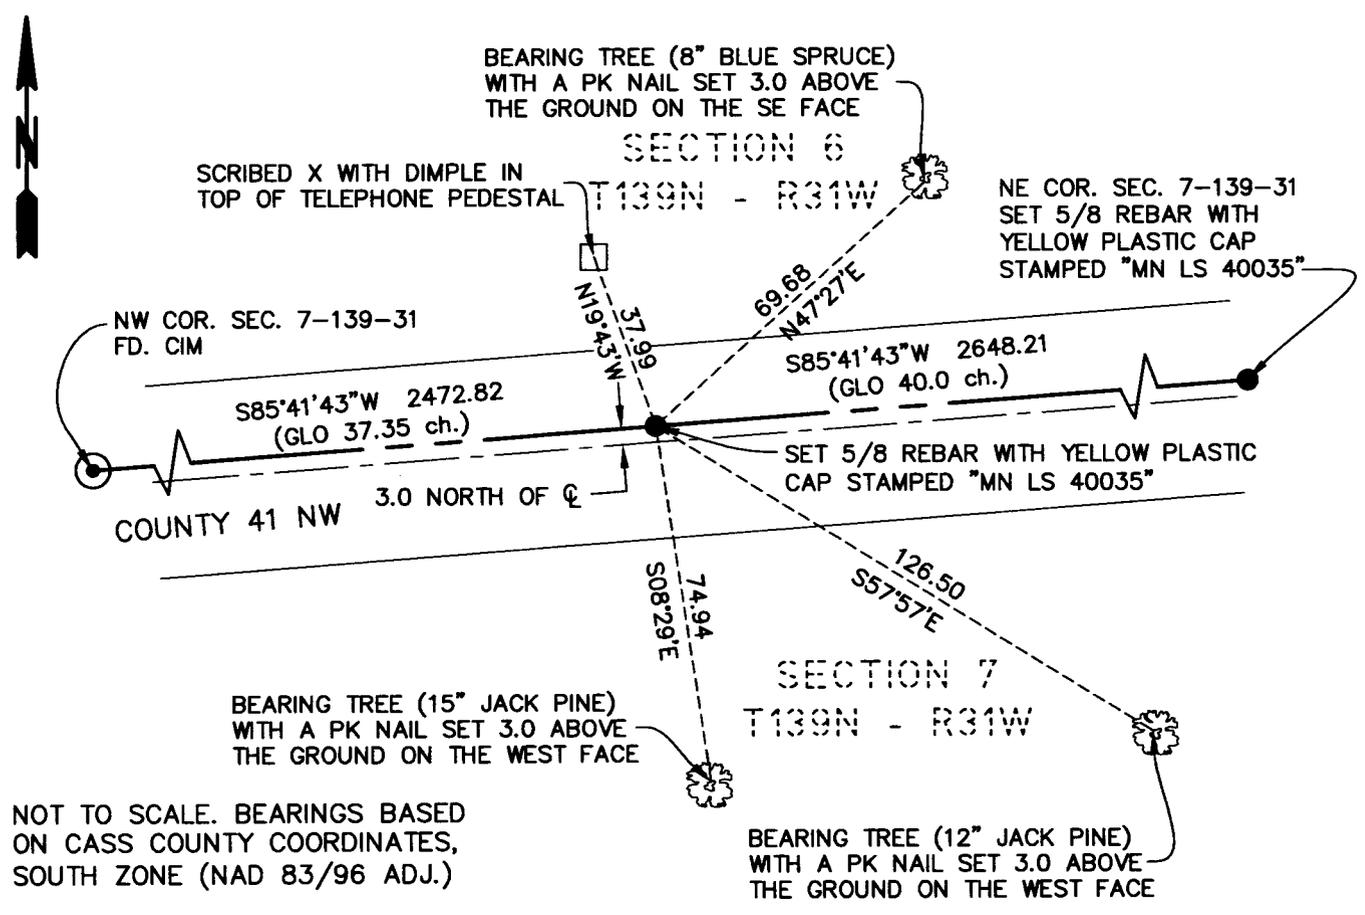

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Meredith E. Carr 11-6-09
SIGNATURE DATE

Registration No. 40035

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

A000592263

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/7/2013 10:39:25 AM

AS DOC #: A000592263
PAGES: 2
REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000592263

STATEMENT OF EVIDENCE

The North Quarter Corner of Section 7, Township 139 North, Range 31 West of the 5th Principal Meridian.

This corner was originally a wood post set by the Government Land Office in 1870.

In 1911, Mr. John Curo, Cass County Surveyor, found evidence at the Northeast corner of Section 7 and place a 2" iron pipe at its location. He also went $\frac{1}{4}$ mile west of the Northeast corner and set a 2" pipe at the sixteenth corner. It appears he set only a temporary quarter corner. (Book A of Surveys page 314)

In September 2009, a survey crew from Ulteig Engineers searched for original evidence and found none. This corner was computed using the GLO proportionate distances from the Northeast and Northwest corners. We set a rebar with plastic cap marked "MN LS 40035".

