

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 18, Township 136N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
Date

left monument as found      lowered monument      removed monument (explain)

On 04/30/2012 placed a 3/8" RE-ROD WITH RLS CAP NO. 17774  
Date

### SKETCH OF REFERENCE TIES

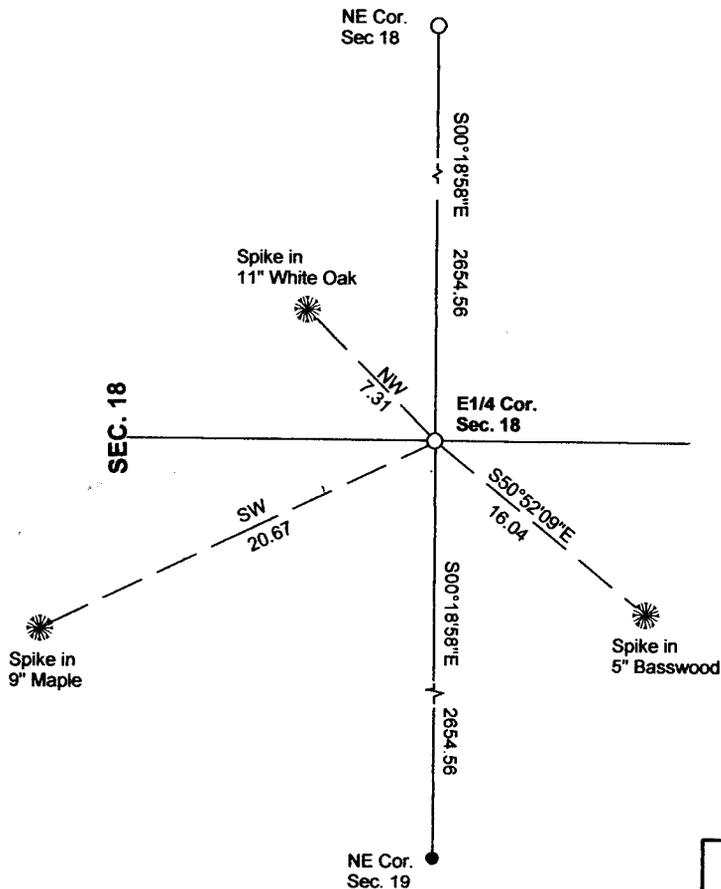

Tie Distances are measured to the spikes

Cass County Coordinate System (South Zone)  
N= 259594.3995 E= 460148.7930

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



SEC. 18

SEC. 17

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 20 Oct 2012  
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000598679

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/5/2013 9:30:46 AM

AS DOC #: A000598679

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep



**INDEX NO. L.0 – 5.0**  
**STATEMENT OF EVIDENCE:**

**EAST QUARTER CORNER OF SECTION 18, TOWNSHIP 136 N., RANGE 31 W., 5<sup>TH</sup> P.M.**

1870        DEPUTY SURVEYOR RICHARD CRONK, IN THE ORIGINAL  
GOVERNMENT SURVEY, SET A POST AND MARKED BEARING  
TREES.

2012 APRIL DOUG STILLE AND MARVIN KOHOUT, LS NO. 17774, OF KOHOUT  
LAND SURVEYING, SEARCHED FOR EVIDENCE OF THIS  
CORNER. A MONUMENT WAS SET AT A PRORATED  
DISTANCE AND ON LINE BETWEEN THE NORTHEAST  
AND SOUTHEAST CORNERS OF SECTION 18.

7107 1500  
7107 1500  
7107 1500