

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 32  
Township 145 N, Range 26 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000599554

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/9/2014 1:30:04 PM

AS DOC #: A000599554

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep

On \_\_\_\_\_, found a(n): \_\_\_\_\_  
DATE



- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 3/8/2012, set a(n): 3.5" Aluminum Cap on 3/4" x 4' Rebar. Flush with Ground  
DATE


See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: Clear Cut Area  
Approx. 25 Years Ago

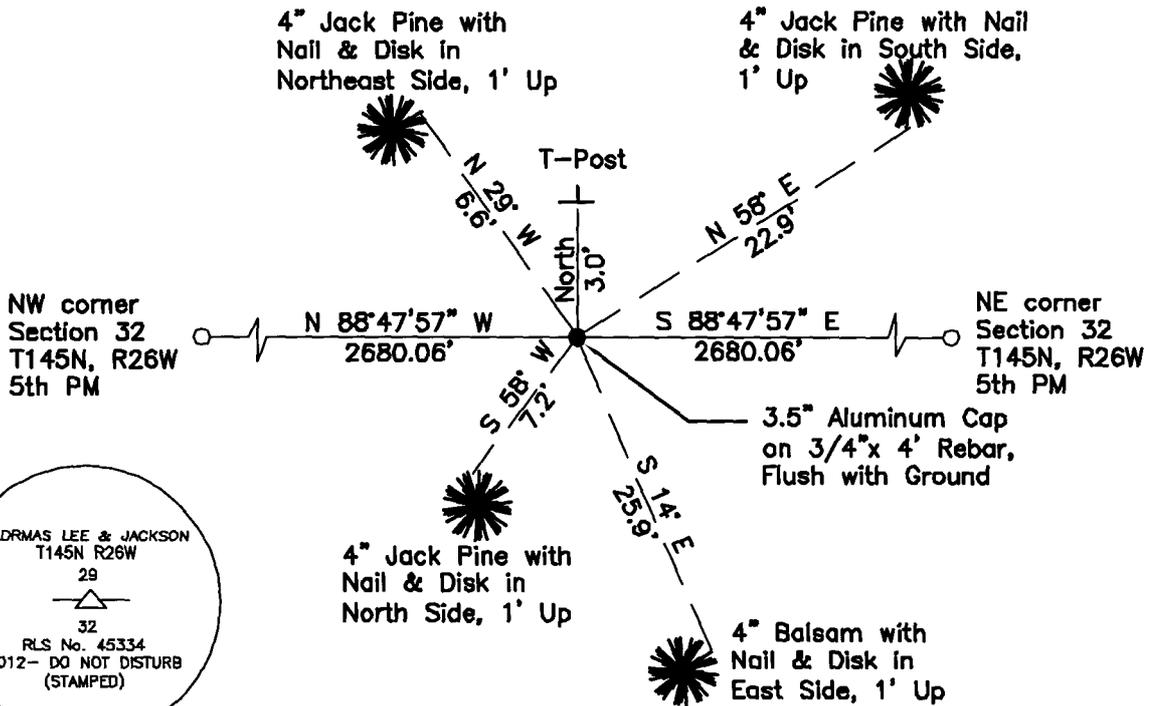

## "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17202788.747  
Easting: 1392686.498

NAD 83/1996 Adjustment.  
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/6/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2  
A000599554



**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 29 and 32 of Township 145 North,  
Range 26 West of the 5<sup>th</sup> Principal Meridian

**1876;** Benjamin C. Baldwin, for the Government Land Office established this corner and set a wooden post and witnessed by:

Norway Pine 12" North 50° West, 20 Links  
Jack Pine 8" South 61° West, 11 Links

**1900;** US Army Corps of Engineers Map of the Pokegama Reservoir shows this corner as found. Map is on file with the USFS.

**1960;** USFS 874 form, on file at the USFS office in Cass Lake, MN, indicates that S.M. Morrison, USFS Forestry Aid, found a squared 4" Jack Pine post 7.7 chains West of a road witnessed by:

Set FSLP East Face of Jack Pine 6"

**2010;** A Kadrmas, Lee & Jackson survey crew found no evidence in a search of this corner location.

**2012;** Ross Wamre, RLS #45334, set a 3.5" stamped Aluminum Cap on ¾" x 4' rebar, flush at a lost single proportionate measurement location. As measured from the Northeast & Northwest Corners of Section 32-145-26. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office