

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 36

Township 139 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF Cass



A000600177

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

2/4/2014 11:48:07 AM

AS DOC #: A000600177

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep



On 1/4/2013, found a(n): 2" Iron Pipe up 2.5'
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

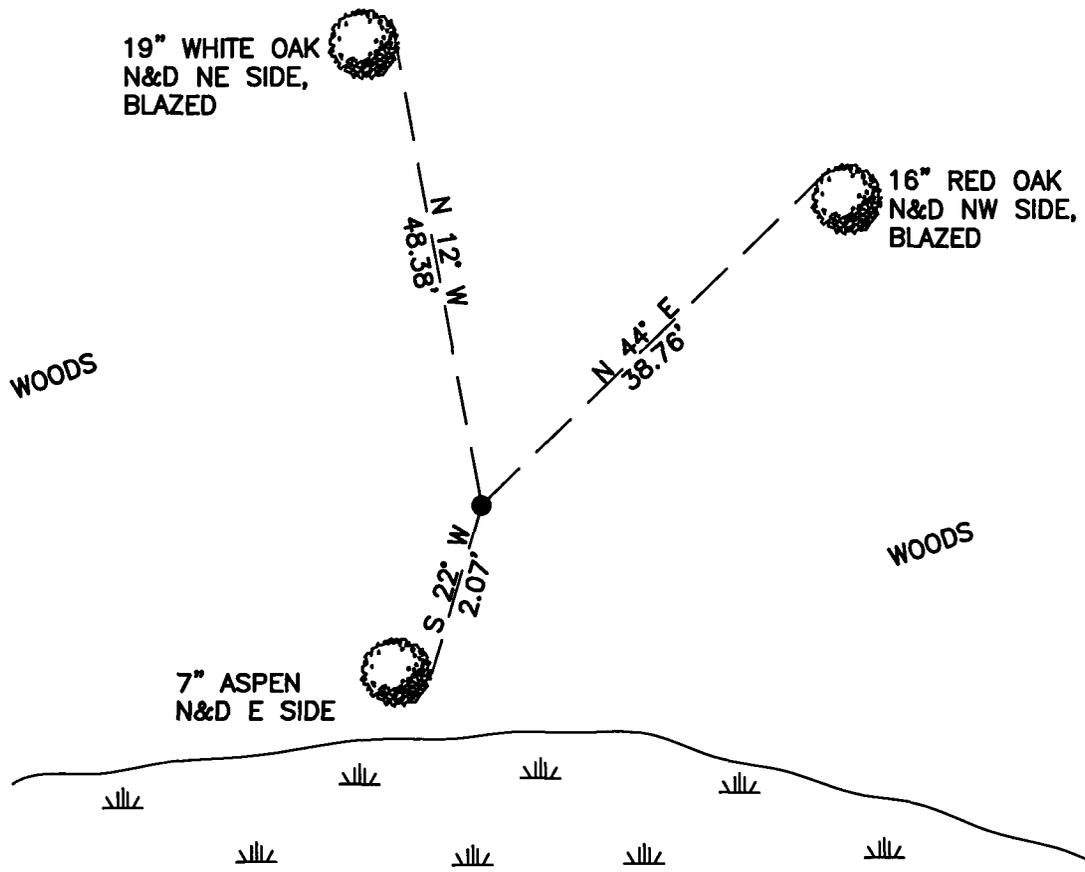

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 339172.328

Easting: 578272.845

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature
Jarrett M. Leas, Minnesota License No. 42619

1-28-14
date

Page 1 of 2 A000600177



Statement of Evidence

East Quarter corner of Section 36, Township 139 North, Range 28 West, 5th Principal Meridian.

- 1863 The US General Land Office, in notes of running the east line of Township 139 North, Range 28 West, set a post for the original corner and referenced it as follows:
8" Aspen S 56° E 14 links 6" W. Birch N 53° W 10 links
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

- 1919 B. Clark, LS 231, CCSO, Survey Record Number 434, Book C, page 308, on file in the CCSO, states "Then set ¼ S. corner bet Sec. 31-36 on true line and East on true line." Page 314 states, "Then set ¼ S. bet. Sec. 36-31 an iron pipe 4 ft. long 2 in. diam. without cap. Stamp the same ¼ S. and drove 2 ft. in ground." Witnessed by the following:
6" Poplar N 22° W 28.0 feet

- 1922 B. Clark, LS 231, County Resurvey, on file in the Cass County Recorders Office, as Document Number 69794, indicates Iron Monument.

- 1939 CCC Washburn Lake field book 1, page 4, on file at the DNR office in Brainerd show CCC personnel found a 2" iron pipe and also set a 3" square stake with tag.

- 1940 CCC Washburn Lake field book 16, Page 3, on file at the DNR office in Brainerd show CCC personnel recovered an iron pipe at 2590' from the south and 37' west of random line.

- 2013 A KLJ survey crew found a 2" iron pipe, and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.