

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 32
Township 145 N, Range 27 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600930

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/13/2014 11:37:33 AM

AS DOC #: A000600930

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

On _____, found a(n): _____




- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 6/27/2012, set a(n): 2.5"x 4' Iron Pipe With 3.5" Brass Cap 0.5' Above Ground With Steel Fence Post On North Face

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: All Trees Double Blazed

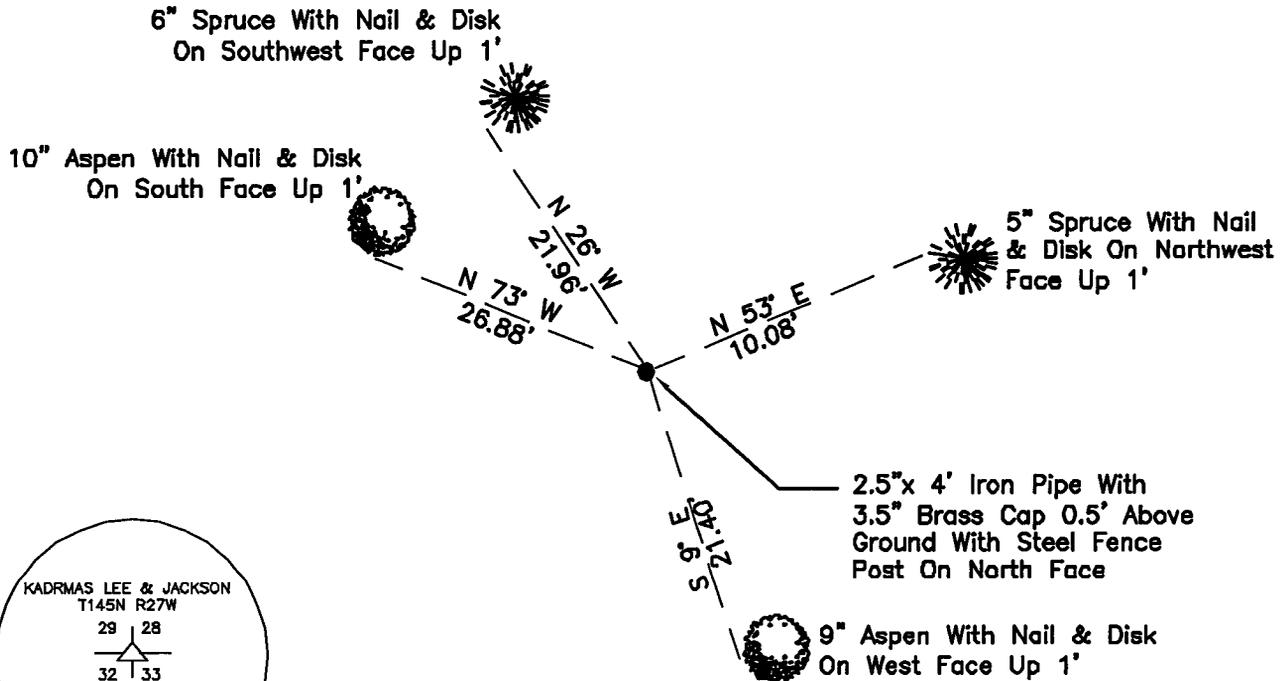

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17203253.979
Easting: 1363856.190

NAD 83/1996 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/27/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000600930



STATEMENT OF EVIDENCE: Corner common to Sections 28, 29, 32 and 33 of Township 145 North,
Range 27 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

White Pine 24" South 52° West, 26 links
White Pine 26" South 35° East, 45 links
Norway Pine 20" North 65° East, 25 links
Norway Pine 22" North 43° West, 100 links

1898; Great Northern Railroad Right-of Way Plat 1804CS7 shows a distance tie to this corner location. Information is on file with the Minnesota Department of Transportation.

1929; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that Edward Iverson, Estimator, found a rotten squared stake 2" x 2" x 24" witnessed by:

FSLP Aspen 5" North 64° West, 0.2 chains

1934; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that Earl M. Handy, Chief of Party, found a squared stake in good condition 24" above ground. With no B.T.'s and no iron stake witnessed by:

Found FSLP Aspen 8" SE, 0.21 chains (1929 Tie)
Set FSLP on Highway No. 8 13.5 chains south of corner

1946; State of Minnesota Department of Highways Right-of-Way Map Index file 13-12 shows an angle and distance tie to a squared wood post in place at this corner location. Information is on file with the Minnesota Department of Transportation.

1996; USFS notes Book 1 of Township 145 North, Range 27 West, page 34, show that Rob Main and Curtis Krause searched for this corner and found many burned and badly rotted pine stumps in area. Some were very large and probably white pine. Most of outer sides were completely burned away. Nothing could be found on any stumps.

2010; A Kadrmas, Lee & Jackson Survey crew completed a field search for this corner position and found no evidence.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information set a 2.5" x 4' iron pipe with 3.5" brass cap 0.5' above ground, at a calculated position from the field recovered alignment of U.S. Highway No. 2 using stationing, angle and distance according to State of Minnesota Department of Highways Right-of-Way Map Index file 13-12. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office



Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office