

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 31
Township 145 N, Range 27 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600933

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/13/2014 11:37:36 AM

AS DOC #: A000600933

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER
BY SR Dep


On _____, found a(n): _____

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On 2/27/2012, set a(n): 3.5" Aluminum Cap On 3/4" x 4' Rebar, Flush With Ground

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

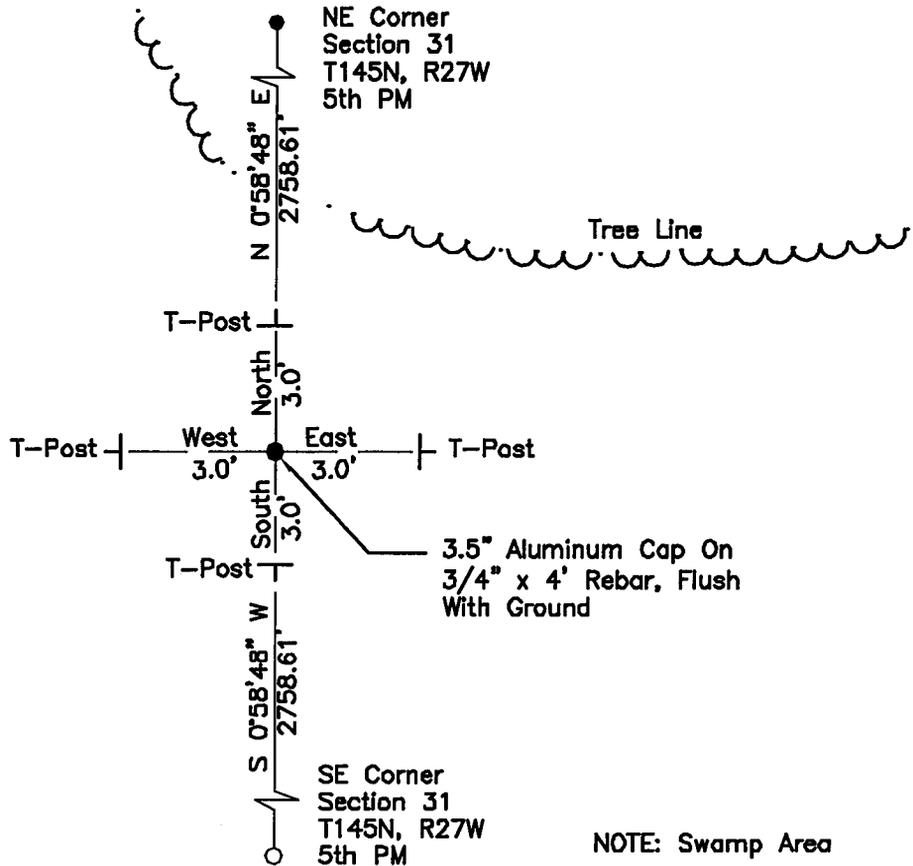

NOTE: Swamp Area



"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17200722.930

Easting: 1358468.329

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/27/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000600933



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 31 and 32 of Township 145 North,
Range 27 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

Jack Pine 8" North 5° East, 520 Links

1929; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that H.E. Johnson, USFS Estimator, searched for this corner and found nothing. He stated that the area had been burned over some time ago.

2010; A Kadrmas, Lee & Jackson Survey crew completed a field search for this corner position and found no evidence.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information set a 3 ½" Aluminum Cap on a 3/4" x 4' rebar flush at a lost single proportionate measurement location. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office