

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 19, Township 138N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
Date _____

left monument as found lowered monument removed monument (explain)

On 12/03/2012 placed a 3/8" REROD WITH RLS CAP NO. 17774
Date _____

SKETCH OF REFERENCE TIES

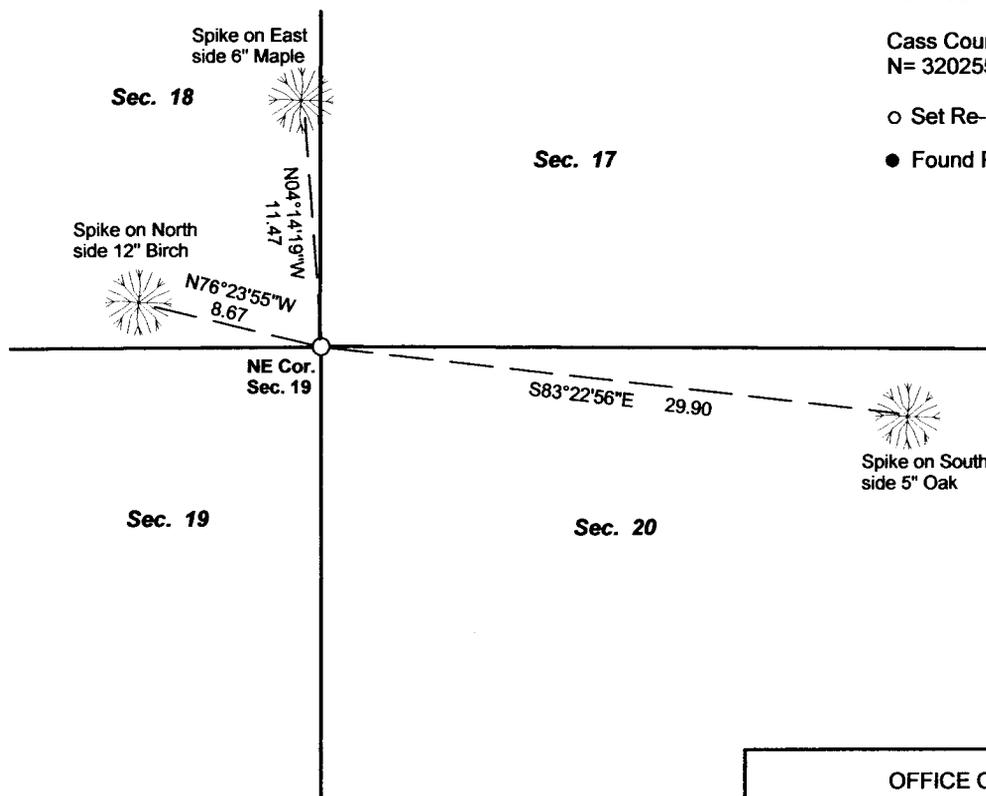


Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)
N= 320255.2756 E= 456545.5150

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 28 Dec 2012
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000603789

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

7/10/2014 11:20:20 AM

AS DOC #: A000603789

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep

Page 1 of 2 A000603789



INDEX NO. N.0 – 5.0

STATEMENT OF EVIDENCE

NORTHEAST CORNER SECTION 19, TOWNSHIP 138N, RANGE 31W, 5TH P.M.

1870 T.B. WALKER GENERAL LAND OFFICE (GLO) DEPUTY SURVEYOR, IN THE ORIGINAL GOVERNMENT SURVEY, SET A POST AND MARKED B.T.'S.

REFERENCES ARE:

8" BIRCH	8" ASPEN	10" ASPEN	7" ASPEN
N53E	S56E	S19-15W	N18W
10 LKS	21 LKS	23 LKS	12 LKS

1912 A TOWNSHIP ROAD INDICATES A SURVEY BY M. A. KEMP

DEC. 2012 MARVIN KOHOUT, LS NO. 17774, AND DOUG STILLE, TECHNICIAN, OF KOHOUT LAND SURVEYING, SEARCHED FOR EVIDENCE OF THIS CORNER, NOTHING FOUND. A 3/8" DIA REROD WITH RLS CAP NO. 17774, WAS SET AT DISTANCES IN HARMONY WITH HISTORICAL FEATURES CALLED FOR IN THE ORIGINAL GOVERNMENT SURVEY.