



A000607792

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/1/2014 11:44:18 AM

AS DOC #: A000607792

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Page 1 of 2 A000607792

Twp 142 Rge 25 Index No. X.0-13.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter of Section 33, Township 142 N., Range 25 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 28 Sept 2006 found a 1.5 inch outside diameter Iron Pipe, down 0.9 foot,
in old grade.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES NOT TO SCALE

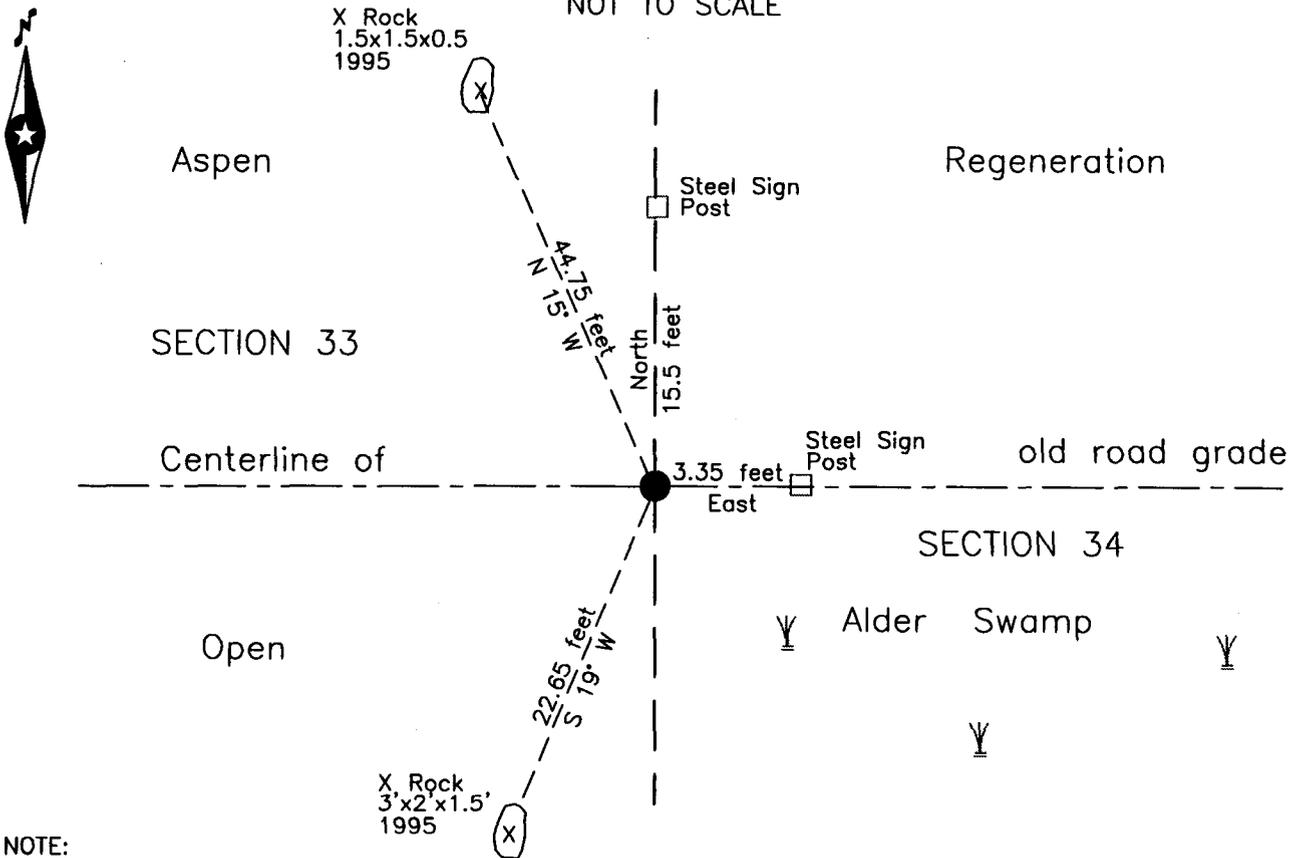

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.


Terry L. Freeman, Cass County Surveyor
Date 11/26/14 MN License No. 21367

Statement of Evidence**East Quarter corner of Section 33, Township 142 North, Range 25 West, 5th Principal Meridian.**

- April 1871 W.P. Allen and E.P. Putnam, General Land Office (GLO) Deputy Surveyors, in the notes of the subdivision of Township 142 North, Range 25 West, set a post for the original corner and referenced it as follows:
 10" Birch N 30° E 9 links (5.94 feet) 6" Maple N 63° W 14 links (9.24 feet)
 The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- Aug 1922 J.H. Flynn, Cass County Surveyor, Survey Record 509, Book D, page 72 Curo Book 152, page 41, on file in the CCHD/SO, survey of County Road. Notes state "made exhaustive search for ¼" lists GLO witnesses, "now is obliterated by fires." Later "return to temp. stake 2640 ft. and at a point 15 ft. North and 9 ft. east put down a flue pipe 1 ½" x 44" for ¼ post. No objects near for new bearings." A portion of the notes have been omitted, however the pictorial shows the distance to the Northeast and Southeast corners of Section 33 is 2624.6'.
- April 1926 A.R. Taubman, Cass County Assistant Engineer, Ditch Shelf 5, Book 155, page 1, on file in the CCHD/SO, survey of "East & West ¼ Line thru Sec. 34". Notes indicate "Appro. ¼ Cor Bet. Secs. 33 & 34". Also lists the following references:
 12" Cedar S. E. 46.0 feet 8" Cedar stump S. W. 41.5 feet
- March 1995 R. Main and C. Krause, United States Forest Service (USFS), Township Book #1, page 39, on file at the USFS Cass Lake Office, states "Fd Flynn monument bent over but in place +,- 2ft. below Road surface. Remove and straighten, monument now 6" below Road surface surrounded by many large rock. Monument falls +,- 4ft. South of CL FR 2495. Off Northwest corner of Alder Swamp." Also lists the following references:
 X Rock 3'x2'x1.5' S 19° W 22.65 feet X Rock 1.5'x1.5'x6" N 15° W 44.75 feet
 Steel Sign Post North 15.5 feet Steel Sign Post East 3.35 feet
- Sept. 2006 B. Hippen, technician, records of the CCHD/SO, found a 1.5 inch outside diameter iron pipe, down 0.9 foot in old grade and all 1995 references in good condition. There are no trees in this area.
- Nov. 2014 B. Hippen, technician, records of the CCHD/SO, found monument and witnesses from 1995. The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered in 2006 by CCHD/SO is the accepted location of this corner.

County Coordinates (Cass County North)

Northing 197659.43

Easting 594291.49