



A000608282

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/18/2014 10:49:06 AM

AS DOC #: A000608282

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Twp 140 Rge 26 Index No. X.0-05.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 31, Township 140 N., Range 26 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 10 Sept 2008 found remains of two pine stumps, at bearing and distance
from GLO feature calls.

left monument as found lowered monument removed monument (explain)

On 12 Dec 2014 placed an 1 inch by 30 inch aluminum tube with aluminum cap,
up 0.7 foot, at bearing and distance from stump remains.

SKETCH OF REFERENCE TIES NOT TO SCALE

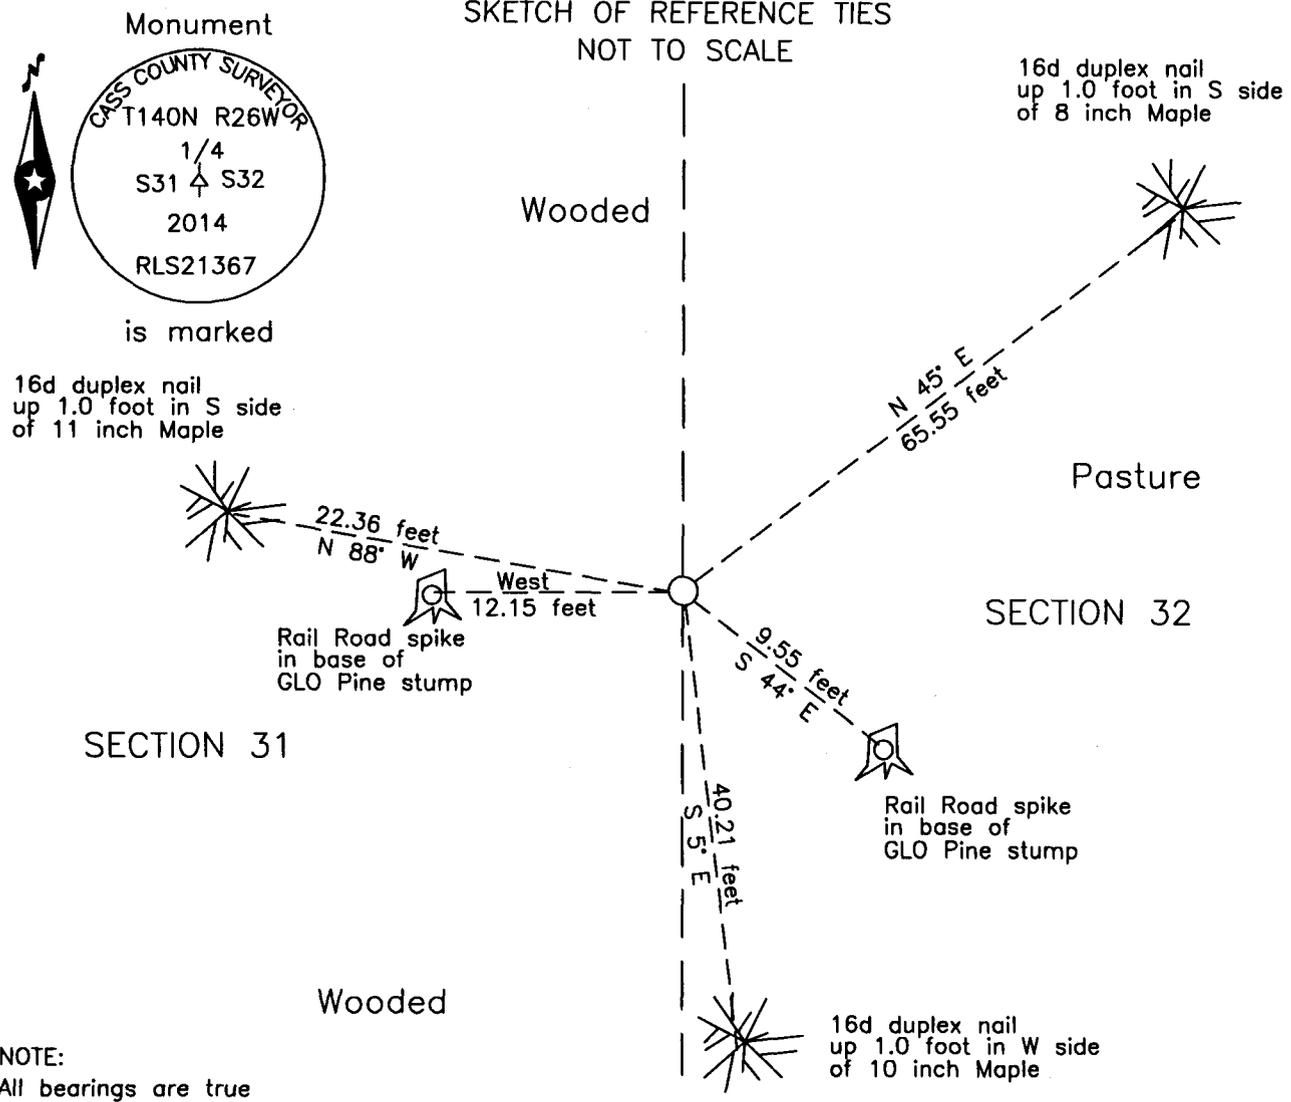

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 12/17/14 MN License No. 21367





Statement of Evidence

East Quarter corner of Section 31, Township 140 North, Range 26 West, 5th Principal Meridian.

May 1871 Allen and Putnam, General Land Office (GLO) Deputy Surveyors, notes for the subdivision of Township 140 North, Range 26 West, set a post for the original corner and referenced it as follows:
8" N. Pine S 44° E 14 links (9.24 feet) 16" W. Pine West 18 links (11.88 feet)
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

Sept. 2008 B. Hippen, technician, records of the CCHD/SO, found remains of 2 pine stumps and charred wood at the GLO bearing and distances from the stumps.

Dec. 2014 B. Hippen, technician, records of the CCHD/SO, set 1 inch by 30 inch aluminum tube with aluminum cap, up 0.7 foot, on the north slope of an island, at the intersection of bearings and distances from the remains of the recovered GLO stumps which agrees with GLO feature calls and witnessed as follows:

RR spike in GLO Pine stump remains	West	12.15 feet			
RR spike in GLO Pine stump remains	S 44° E	9.55 feet			
11" Maple	N 88° W	22.36 feet	8" Maple	N 45° E	65.55 feet
10" Maple	S 5° E	40.21 feet			

The recovered and established witnesses for this corner position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set in 2014 by the CCHD/SO, is the correct perpetuation of this corner.

County Coordinates (Cass County North)

Northing 134390.58

Easting 552193.15