



A000608446

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/26/2014 9:17:53 AM

AS DOC #: A000608446

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep TX#: 120142

Page 1 of 2 A000608446

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Prothier*

Date: 12-16-14 License No: 41002

North Quarter Corner of Section 33, Township 136 N, Range 31 W, 5<sup>th</sup> P.M.

On 5-15-14 found a 2" iron pipe with 3" cap, 0<sup>5</sup> above grade


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

Corner Index: V-11

Not to Scale

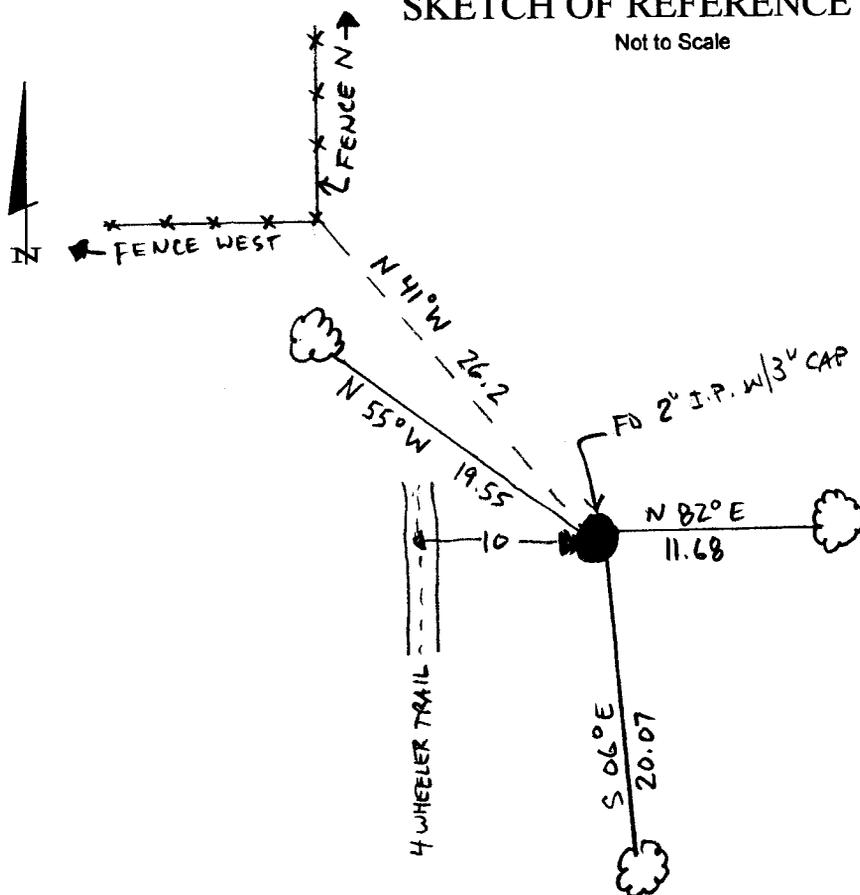

Statement of evidence for this corner position is on the back of this page



**Statement of Evidence**

**North quarter corner, Section 33, Township 136 North, Range  
31 West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1870 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

20" N. Pine.	S 1° E	18 links
6" W. Birch	N 60° E	23 links

1905 – N.W. Hicks, in township road order, finds stumps of original bearing trees and sets a stake at corner.

1910-11 – A.W. Moulster in County Survey Record Book A, pages 456-464, found stumps and stake set by Hicks replaces with 2x48" capped galvanized iron pipe in concrete. Also found in Curo Book 50, p. 129.

2014 – Patrick Trottier, PLS 41002, found and accepted a 2" pipe with 3" cap and established witnesses as shown on the face of this survey.

County Coordinates (Cass County South)

Northing 246407.87

Easting 468183.73