



A000608521

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/26/2014 12:47:29 PM

AS DOC #: A000608521

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep TX#: 120163

Twp 142 Rge 27 Index No. G.0-05.0

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 7, Township 142 N., Range 27 W., 5th P.M.  
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 29 July 2009 found \_\_\_\_\_ remains of GLO 1 inch iron pipe monument,  
down 4.5 feet in Boy Lake Drive.

left monument as found     lowered monument     removed monument (explain)

On 29 July 2009 placed a 1 inch by 30 inch Aluminum tube with aluminum cap  
down 0.6 foot 7 feet± west of centerline of Boy Lake Drive.

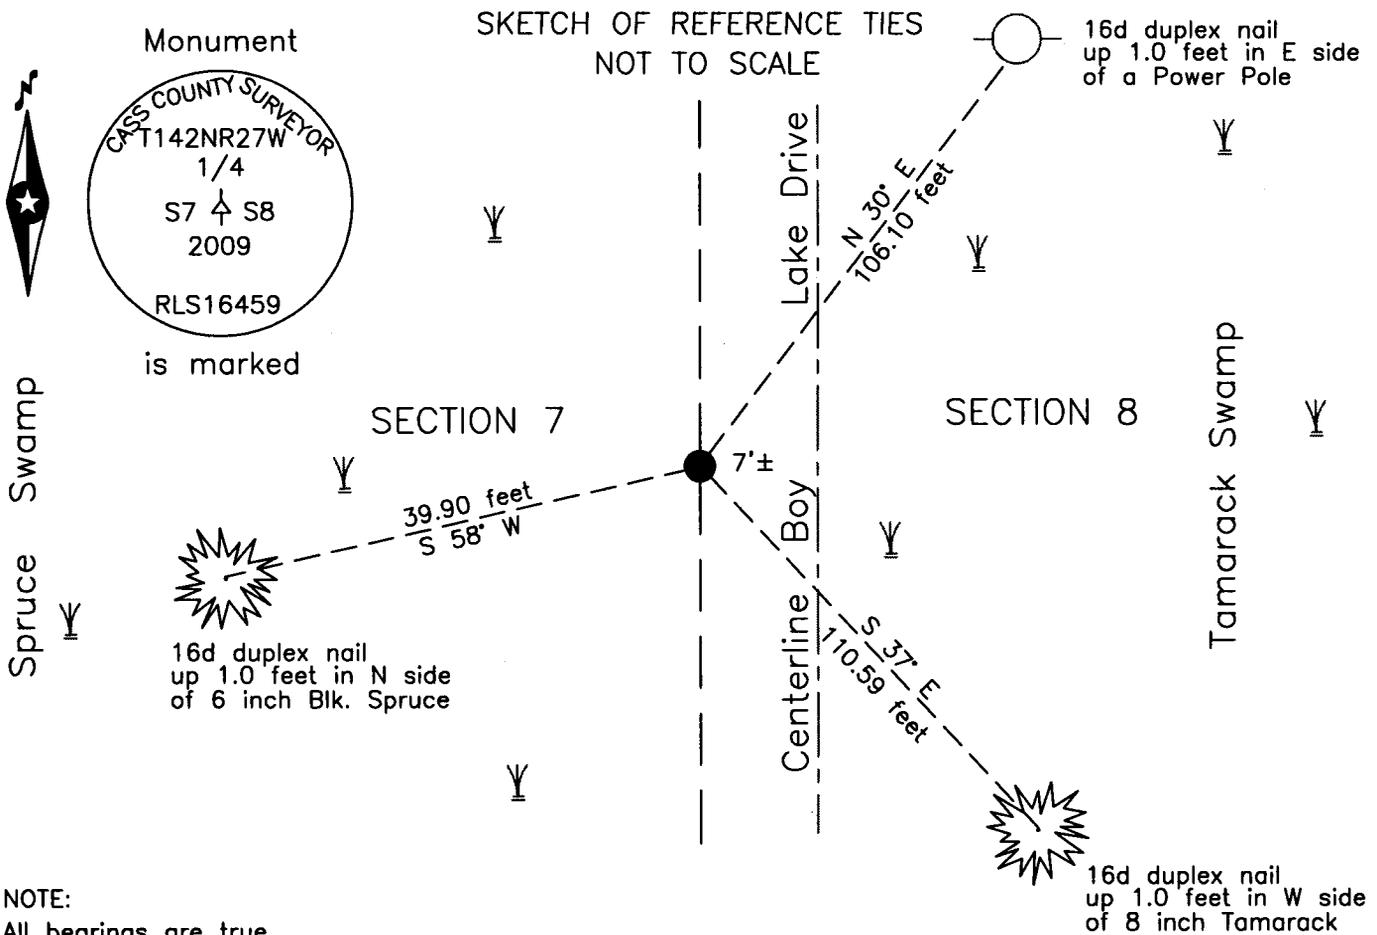

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor

Date 12/24/14 MN License No. 21367

Statement of Evidence**East Quarter corner Section 7, Township 142 North, Range 27 West, 5th Principal Meridian.**

- Nov. 1873 P.H. Conger, GLO Deputy Surveyors, in the notes of the subdivision Townships 142 North, Range 27 West, set a post for the original corner and referenced it as follows:  
 4" Balsam N 40° E 6 links (3.96 feet) 9" Tam S 20° W 4 links (2.64 feet)  
 The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- April, 1915 Final Road Order of Township Board, on file at the Cass County Highway Department, describes a road on the East line of Sections 6, 7 and 18.
- 1920 E.G. Harrington, U.S. Cadastral Engineer, assisted by D.B. Clement, U.S. Surveyor, GLO, Reestablishment of a portion of the Exteriors and Subdivisional Lines Township 142 North, Range 27 West, on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the CCHD/SO, states "The point for the original ¼ sec. cor., which point is mkd. by an oak stake. North, and alongside of which, I set an iron post, 3 ft. long, 1 ins. diam., 26 ins. in the ground, for the ¼ sec. cor. with brass cap". Also "The original bearing trees were cut out at the time the right of way for the road cleared." The following new witnesses are listed:  
 6" Spruce S 87 1/4° E 55 links (36.30 feet) 6" Spruce S 67 1/2° W 59 links (38.94 feet)
- Aug. 1921 Survey Record No. 462, Book C, page 434, on file in the CCHD/SO, pictorial indicates I.M. set by U.S.G.L.O. Survey.
- June 1993 C. Krause and R. Main, technicians, United States Department of Agriculture Forest Service(USFS), T 142 N R 27 W, Book 3, page 24, on file in the USFS Cass Lake Office, states "No evidence of Monument found. Fd stump to West with spk and lath nearby, stump is possible but unsure."
- July 2009 B. Hippen, technician and P. Swentkofske, Cass County Highway Department equipment operator, records of the CCHD/SO, in excavating this search area recovered one side of the flared base of the 1 inch GLO monument, 4.5 feet below road surface, 1 foot, more or less, below corduroy. Set a 1 inch outside diameter by 30 inch long aluminum tube with aluminum cap, down 0.6 foot, 7 feet, more or less, West of centerline of Boy Lake Drive and witnessed as follows:  
 6" Blk. Spruce S 58° W 39.90 feet Power Pole N 30° E 106.10 feet  
 8" Tamfarack S 37° E 110.59 feet
- Dec. 2014 B. Hippen, technician, records of the CCHD/SO, set a mag nail over the aluminum cap monument, 7 feet, more or less, West of the new centerline of Boy Lake Drive, the 2009 witnesses are all good.  
 The monument, recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the CCHD/SO in 2009 is the correct perpetuation of this corner.**

**County Coordinates (Cass County North)**

**Northing 219991.53**

**Easting 519638.61**