



A000609641

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

2/18/2015 10:17:42 AM

AS DOC #: A000609641

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 121093

Twp 135 Rge 30 Index No. J.0-05.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 18, Township 135 N., Range 30 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On Dec.24, 2014 placed 1/2" Capped iron pipe with RLS 40827 flush with ground surface

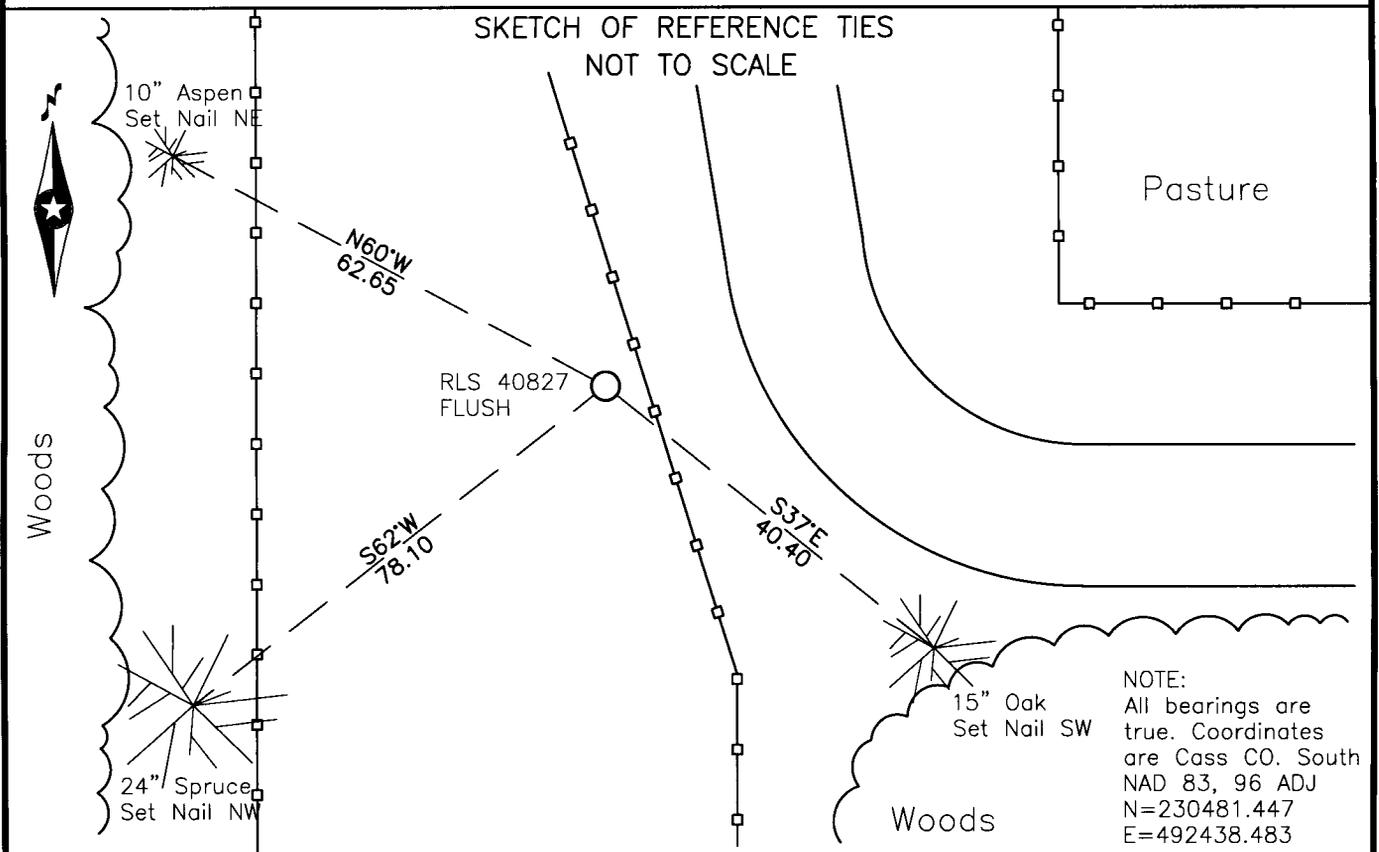

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.


Daniel W. Skinner, Land Surveyor

Date 2-15 MN License No. 40827





Index No. J.0-05.0

Statement of Evidence

Northeast Corner Section 18, Township 135 North, Range 30 West

1869 Original US General Land Office Survey by T. B. Walker, set a wood post and bearing trees as noted:

14"	Balsam Fir	S 10° W	7 links
5"	Spruce	S 78° E	18 links
7"	White Pine	N 70° E	8 links
12"	Norway Pine	N 46° W	29 links

Information on file with the Minnesota Historical Society in St. Paul, MN and copies are filed with the CCHD/SO.

1914 County Survey Record Book "B" P. 57-61 shows a survey by John Curo. He found a stake. Also in Curo Book 94, P. 125. Information on file with CCHD/SO.

2014 Karvakko Engineering completed a search of the area, no evidence of corner was recovered. Corner was set lost by double proportion. Northing was established using found certified corners at the Northeast corner of Section 7 T.135, R.30 and Northeast corner of Section 19 T.135, R.30. Easting was established using found certified corners at the Northeast corner of Section 13, T.135,R.31 and the Northeast corner of Section 17, T.135, R.30. Set a ½ in capped iron pipe with RLS # 40827 flush with ground surface and accepted it as the corner.

Reference ties:

10"	Aspen	N 60° W	62.65 feet
24"	Spruce	S 62° W	78.10 feet
15"	Oak	S 37° E	40.40 feet