



A000610425

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/26/2015 10:42:22 AM

AS DOC #: A000610425

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep TX#: 121714

Page 1 of 2 A000610425

Twp 139 Rge 26 Index No. N.0-18.6

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander corner #38 of Section 23, Township 139 N., Range 26 W., 5th P.M.
North line State of Minnesota, County of Cass, west shore of Lake Roosevelt.


At the corner location shown on the sketch:

On 25 July 2014 found 2 inch iron pipe, up 1.0 feet, leaning,
located the base of pipe.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES
NOT TO SCALE

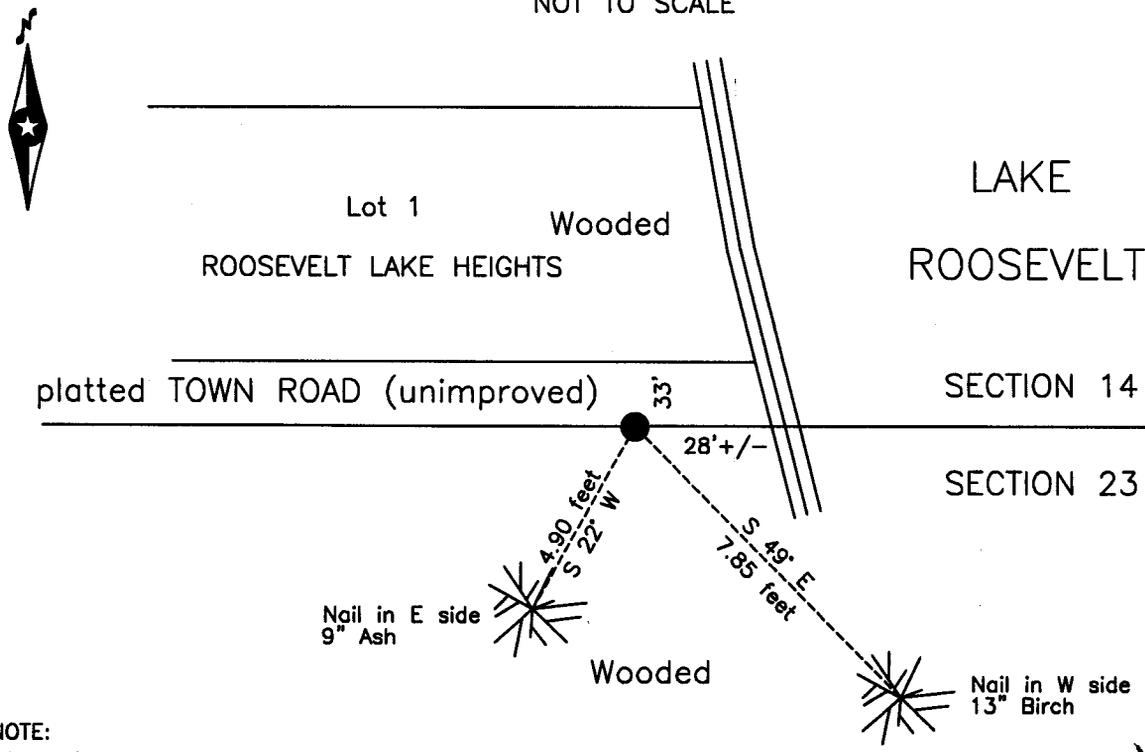

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.
I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen
Date 3/16/15 MN License No. 16459



Index No. N.0-18.6

Statement of Evidence

Meander Corner No. 38, on the line between Sections 14 and 23, Township 139 North, Range 26 West, 5th Principal Meridian, west shore of Lake Roosevelt.

Nov.30 G. Johnson and A. Thornton, General Land Office (GLO) Deputy Surveyors, in the subdivision of this
1863 township, measured across Crooked Lake on the ice, and set a post for the original meander corner on the west shore. The post was referenced as follows:

6" W. Birch N 50° W 52 links (34.32 feet) 9" Elm S 30° E 20 links (13.20 feet)

The original plat and above record are archived with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with Cass County Highway Department/Surveyor's Office.

July 1, J.W. Curo, LS 1428, Cass County Surveyor, Survey Record 173, Book A, page 394, on file with Cass
1909 County Highway Department/Surveyor's Office, states "...@ Meander Cor. No. 38 of Twp. 139, Rge 26, Gov't notes call for...the Birch is gone but the Elm stands plainly marked, from which we set a post for the M.C. with new Bearing Trees as follows:"

12" Birch N 82°08' W 12.98 feet Old Elm B.T. S 30° E 13.20 feet to tack head

Sep. 3, M.A. Kemp, Deputy County Surveyor, Survey Record 281, Book B, page 185, on file with Cass County
1912 Highway Department/Surveyor's Office states "...@ 5582.68 West Meander Corner No. 38 set by Curo in 1909 stands 74.80 North, the bottom of Curo's stake still remains but the top is burnt off so we set a new stake being oak 4x4x24 inch with tack for true M.C. As the Birch bearing tree marked by Curo is down, we mark a new one, being Elm 12 inch N 30° W, 29.10 feet..."

May J.M. Greene, surveyor, prepared the plat of ROOSEVELT LAKE HEIGHTS ADDITION in Government Lot
1927 2, Section 14. The subject corner is shown by symbol and label on said plat. The plat was recorded with the Cass County Register of Deeds as Document Number 89667. Also in Curo Book 103, page 43 on file in Cass County Highway Department/Surveyor's Office.

1937 Civilian Conservation Corps, Washburn Lake Book 3, page 63, on file with the Minnesota Department of Natural Resources in Brainerd, MN. The Cass County Land Corner Record states "I.P. at 32 Ch. E of NE 22".

Aug. L. Huhn, LS 24332, prepared the plat of RASK ADDITION in Government Lot 2, Section 14. The subject
2012 corner is shown and dimensioned on said plat. The plat was recorded with the Cass County Register of Deeds as Document Number A000586037 on November 2, 2012.

July Northwestern Surveying and Engineering, Inc., crew of Kadelbach and Sarkela recovered, located and
2014 witnessed a slightly leaning 2" inch iron pipe. The monument, together with the recovered and established references for the position is shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by NWSE in 2014 is the accepted location of this corner.