

Page 1 of 2
A000621460

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA CONTAINED HEREIN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

Robert M. Murray SIGNATURE 4-25-16 DATE

LICENSE NO. 15483

- LAND SURVEYOR PROFESSIONAL ENGINEER
- COUNTY SURVEYOR COUNTY ENGINEER



A000621460

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/19/2016 11:39:01 AM

AS DOC #: A000621460

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 130668

MAD 83 (1996) CASS COUNTY NORTH ZONE COORDINATES
N = 300303.46 E = 403048.07
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. R-13, SOUTHEAST CORNER OF SECTION 21, TOWNSHIP 145, RANGE 31, 5TH P.M.

STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:


- ON 11-25-2015 FOUND A(N) Nothing
DATE
- LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
- ON 01-11-2016 PLACED A(N) 1/2 inch x 14 inch iron pipe with plastic cap L.S. 15483, used existing ties
DATE

SKETCH OF REFERENCE TIES

Magnetic Declination Assumed 0°0'

Sketch Not To Scale

MONUMENT MARKED:

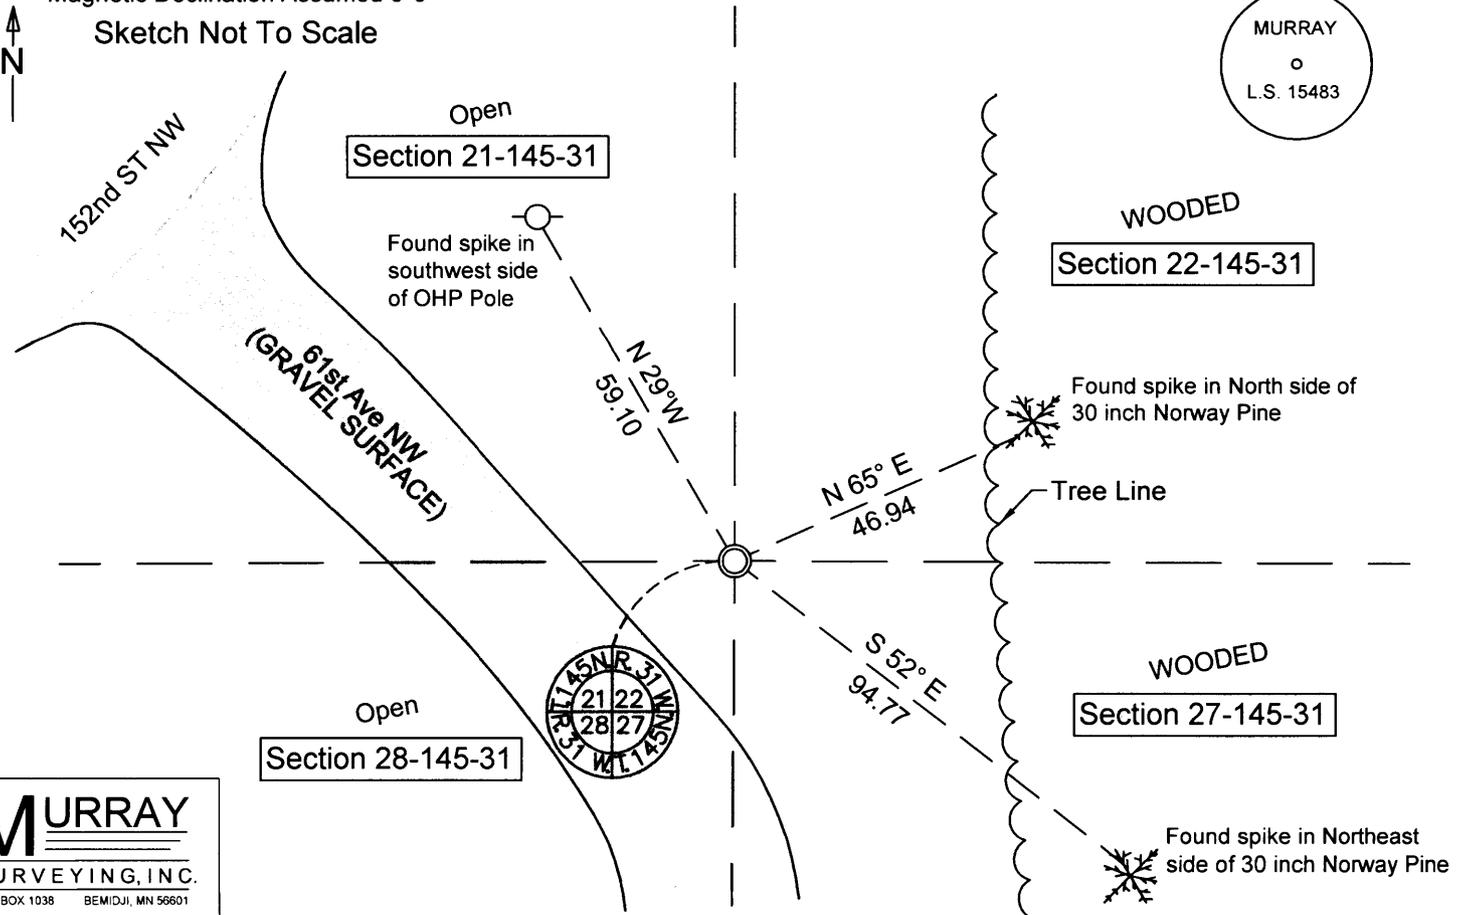

MURRAY
SURVEYING, INC.
P O BOX 1038 BEMIDJI, MN 56601
218-751-5898

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

Statement of Evidence

SOUTHEAST CORNER SECTION 21, TOWNSHIP 145 NORTH,
RANGE 31 WEST OF THE 5TH PRINCIPAL MERIDIAN

The Original Public Land Survey was run in 1875 by Benj C. Baldwin. A wood post was set to mark the corner and four bearing trees were recorded as accessories; a 6 inch Jack Pine South 3.5 degrees East 196 links, an 8 inch Jack Pine South 4 degrees West 190 links, a 4 inch Jack Pine North 52 degrees West 78 links, and an 8 inch Jack Pine North 48.5 degrees East 370 links.

In 1913, John Curo, Land Surveyor, found two old bearing trees from the Original Public Land Survey; a 6 inch Jack Pine South 3.5 degrees East 196 links, and an 8 inch Jack Pine South 4 degrees West 190 links. He then set a 2.25 inch by 48 inch capped galvanized iron pipe and recorded two new bearing trees as accessories; an 8 inch Jack Pine North 32 degrees 56 minutes West 49.05 feet, and an 8 inch Jack Pine North 65 degrees 8 minutes East 80.54 feet.

In 1935, J.A. Gjelhaug marked a new bearing tree as an accessory; 8 inch Jack Pine South 85° East 65.5 links.

In 1962, R.H. McDonald, USFS, found 2 inch diameter galvanize pipe with marked cap, he lowed the monument 6 inches as top was exposed by erosion. He also recorded two bearing trees and on accessory; a 5 inch North 55° East 43.6 feet, a 7 inch Norway Pine South 68°30' East 34.8 feet, and a Cedar Post East 35.0 feet.

In 1981, Curt Krause and Gary Brama, USFS, found 2.5 inch by 48 inch iron pipe with cap 4 inches below road. They found bearing trees from 1962. They also recorded 4 bearing trees; a 10 inch Norway Pine North 30°East 106.47 feet, a 19 inch Norway Pine North 52° East 70.03 feet, a 14 inch Norway Pine South 83°East 112.25 feet, and a 10 inch Norway Pine South 50° East 94.78 feet.

In 2000, Cass County Surveyors Office, found in place a 2 inch iron pipe with plumbers cap, down 0.3 feet. It is located 2 feet South of centerline C.R. No. 146 and 7 feet West of centerline north and south C.R. No. 146. They found two bearing trees from the USFS in 1981. They then recorded three bearing trees and one accessory; a 12 inch Norway Pine South 38 degrees West 70.41 feet, a 16 inch Norway Pine North 52 degrees East 70.03 feet with a bearing tree tag, a 13 inch Norway Pine North 30 degrees East 106.47 feet with a bearing tree tag, and an OHP Pole North 25 degrees West 59.11 feet.

On 11/25/2015 Murray Surveying Inc,. was searching for Public Land Survey Corners in this area. They found reference ties recorded in 2000 by the Cass County Surveyor's Office referenced above.

On 01/11/2016 Murray Surveying Inc,. after reviewing corner location with Terry Freeman, used his established position for the Southeast corner of Section 21. They set a 1/2 inch iron pipe with plastic stamped cap "MURRAY LS 15483". They also recorded two bearing trees and one accessory; a 30 inch Norway Pine North 65 degrees East 46.94 feet , a 30 inch Norway Pine South 52 degrees East 94.77 feet, and an OHP Pole North 29 degrees West 59.10 feet.

For additional information contact Murray Surveying Inc, Bemidji, MN.