



A000630641

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/10/2017 2:06:42 PM

AS DOC #: A000630641

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY KF Dep TX#: 138309

Page 1 of 2 A000630641

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. R.0 - 1.0

NW Corner of Section 30, Township 136, Range 32, 5 P.M.
STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On MARCH 13, 2017 found a 1" SOLID IRON PIN IN THE NORTH DITCH, FLUSH WITH THE GROUND AND
10± FEET NORTH OF THE MINIMUM MAINTENANCE ROAD

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
date

SKETCH OF REFERENCE TIES

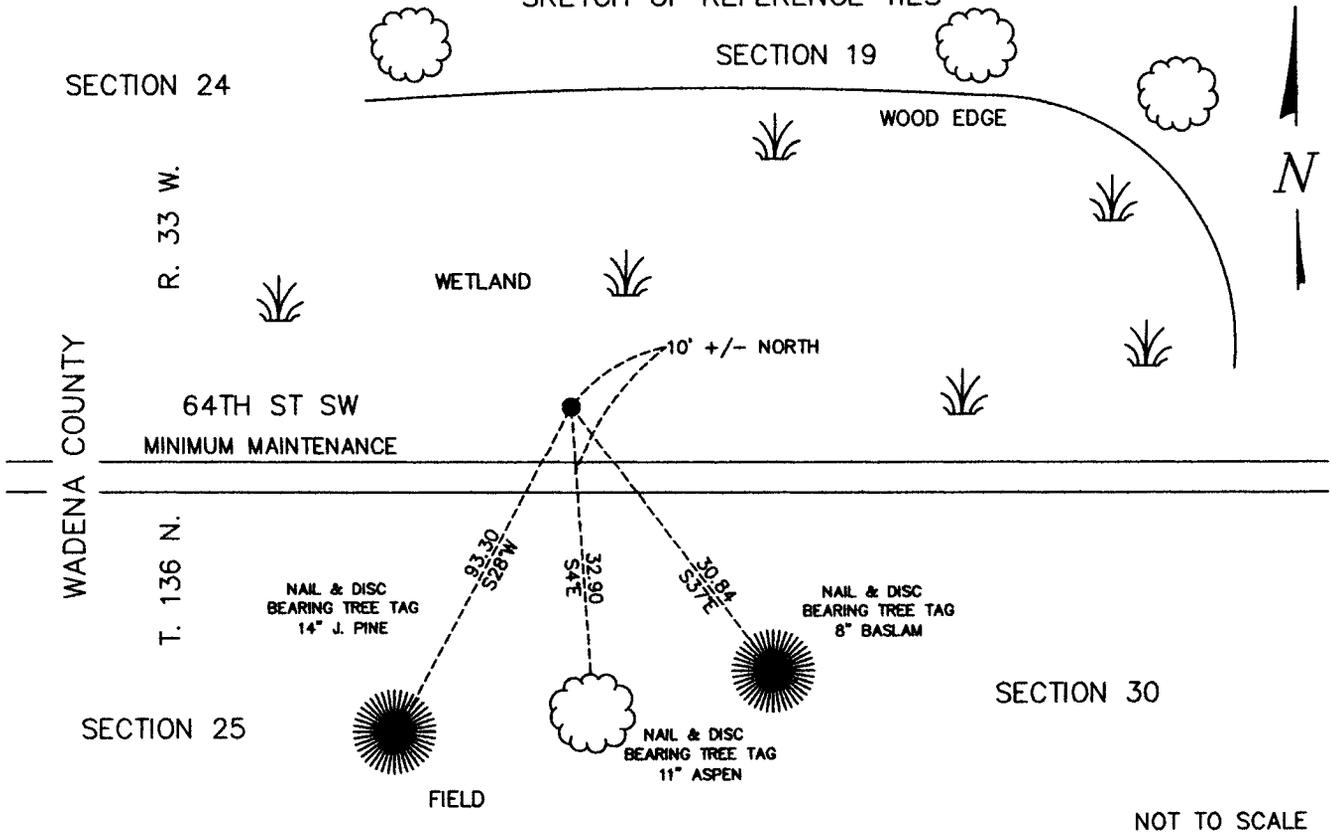

NOT TO SCALE

Statement of evidence relative to this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE Ross M. [Signature]

DATE 3-31-2017 Registration No. 45334

Title: Land Surveyor Professional Engineer County Surveyor County Engineer



R.0 – 1.0

The Northwest Corner of Section 30, Township 136 North, Range 32 West of the Fifth Principal Meridian, Cass County, Minnesota, was established as part of the Original Public Land Survey during 1858. The Original Public Land Survey for the west line of 136-32 was done by H. Mellen, U.S. Deputy Surveyor. The Original monumentation was a set wood post to mark this corner position with bearing tree as follows:

12" Spruce Pine S10°E – 30 links (19.80 feet)
14" Y. Pine S23°W – 51 links (33.66 feet)
5" Tam. N9°E – 52 links (34.32 feet)
5" Spruce Pine N60°W – 26 links (17.16 feet)

Information on file in the MN Historical Society, St. Paul, MN. Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

September 1903, W.M. Hallett, Cass County Engineer, Shows road on the North line of Section 30, on file in the Road Calendar B, page 5.

Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

October 1904, W.M. Hallett, Cass County Engineer, Surveyor's Report shows road on the North line of Section 30, on file in Township Road Orders.

Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

1926, J. M. Greene, County Surveyors Record Book D., page 171 shows found the corner.

Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

October 2004, T. Anderson, CCHD technician, records of the CCHD/SO, found a 1 inch outside diameter iron pipe, capped RLS 13145, flush, 10' +/- north of centerline Minimum Maintenance Road, on remains of barb wire fence running south and witnessed as follows:

4" J. Pine, S37°E – 30.84 feet
10" Aspen, S4°E – 32.90 feet
11" J. Pine, S28°W – 93.30 feet

August 17, 2007, M.H. Nyberg, LS 13145, conduct a survey in Section 24, Township 136, Range 33 where he shows a found 1" solid iron pin monument on the Certificate of Survey for Charles Jasmer.

On March 14, 2017 Survey Mapping Solutions, Inc. (SMS) survey crew located 1" solid iron pin in the ditch, flush with ground and 10' +/- North of the centerline of the East –West Minimum Maintenance Road.

The recovered and established references for the position are shown on the face of this document. Analysis of the recovered record data, field evidence and survey measurements, indicates that the found monument is the correct perpetuation of this corner. Witness corners are as follows:

8" J. Pine, S37°E – 30.84 feet
12" Aspen, S4°E – 32.90 feet
14" J. Pine, S28°W – 93.30 feet
10' +/- North of the centerline of the East –West Minimum Maintenance Road

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Surveyor's Office
Cass County Engineer's Office
MN DNR, Division of Lands and Minerals, Survey Section
MN DOT District Surveys Office in Baxter

Quarter Corner observed by GPS

Datum: Cass County South Coordinates

Geodetic Position NAD 83 (1996 HARN Adj.)

N = 251741.995

E = 421266.050