



A000637923

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/18/2018 11:01:02 AM

AS DOC #: A000637923

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep TX#: 143948

TwP 142 Rge 28 Index No. L.0-15.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Center Quarter corner of Section 15, Township 142 N., Range 28 W., 5th P.M.  
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 29 April 2017 found a 1 inch outside diameter iron pipe with GLO brass cap,  
up 1.6 feet, 145 feet± east of centerline Trail.


left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

Monument

SKETCH OF REFERENCE TIES  
NOT TO SCALE

Wooded

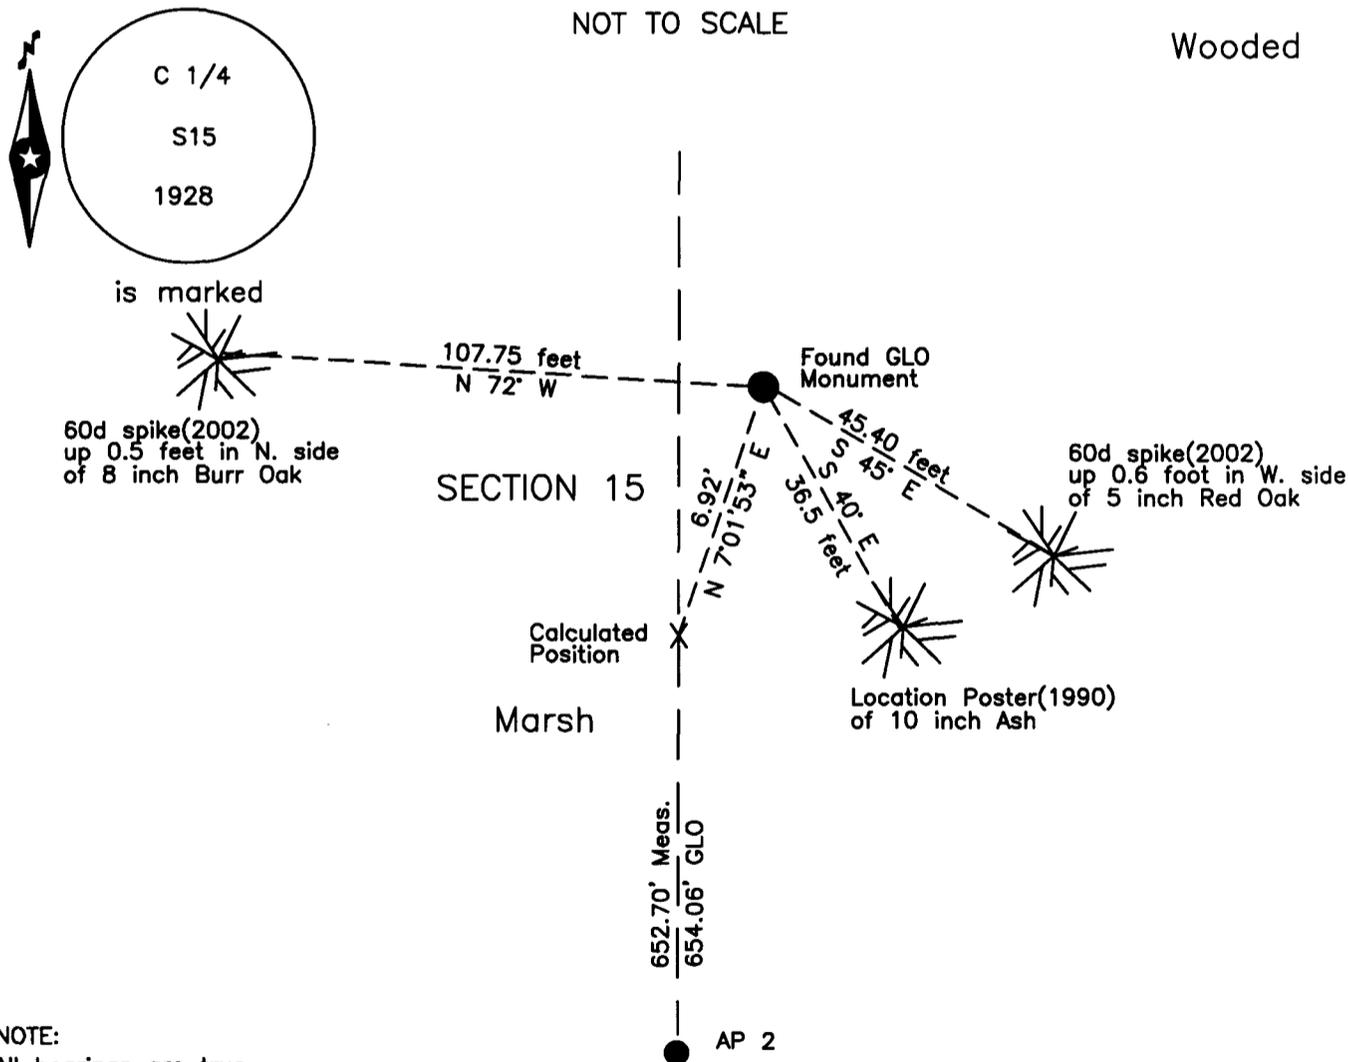

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

  
Terry L. Freeman, Cass County Surveyor  
Date 1/17/18 MN License No. 21367



**Index No. L.0-15.0**Statement of Evidence**Center Quarter corner Section 15, Township 142 North, Range 28 West, 5th Principal Meridian.**

- June 1928 Hal D. Craig, General Land Office U. S. surveyor, states he set the Center quarter section corner, an iron post 3 feet long, 1 inch diameter, 28 inches in ground with brass cap, Referenced as follows:  
 12" Poplar N 30°30' E 174 links (114.84 feet) 14" Poplar S 34°30' E 102 links (67.32 feet)  
 The above records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- Feb. 1990 United States Department of Agriculture, Forest Service (USFS), personnel, Field Book #3, page 38, on file in the Cass Lake Office, indicates found the iron and placed a tag on the following:  
 12" Ash S 40° E 36.5 feet
- April 2002 R. Main, technician, USFS, Field Book #3, page 38, on file in the Cass Lake Office, indicates he found the iron in place leaning in grass and alder slough. He straightens corner and marked new witnesses as follows:  
 3.5" R. Oak S 45° E 45.40 feet 7" W. Oak N 72° W 107.75 feet  
 7" Maple West 130 feet
- April 2017 B. Hippen, technician, records of the CCHD/SO, found a 1 inch outside diameter iron pipe, with GLO brass cap, up 1.6 feet, wired to USFS steel post, in wet marsh and Tag Alder, 145 feet east of Trail and witnessed as follows:  
 10" Ash(1990) S 40° E 36.5 feet 5" R. Oak(2002) S 45° E 45.40 feet  
 8" W. Oak(2002) N 72° W 107.75 feet 7" Maple West 130 feet  
 Subdivision of Section 15, indicates this monument is N 7°01'53" E, 6.92 feet of the correct position for the center quarter.

The monument, recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the position established by the CCHD/SO in 2017 is the accepted location of this corner.**

**Correct Corner Position**

**County Coordinates (Cass County North)**

**Northing 214925.78**

**Easting 500715.60**

**Monumented Corner Position**

**County Coordinates (Cass County North)**

**Northing 214932.64**

**Easting 500716.45**