



A000643871

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:44:43 AM

AS DOC #: A000643871

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF _____ Dep TX#: 148821

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier
PATRICK A TROTTIER

Date: 9-05-18 License No: 41002
RLS 41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ .M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO. _____

NORTHEAST Corner of Section 4, Township 136, Range 32, 5TH P.M.

On _____ found a _____

left monument as found, lowered monument, removed monument (explain)


On 7/25/18 placed a 1/2" x 48" IRON PIPE WITH PLASTIC CAP MARKED RLS 41002

UP .5'

SKETCH OF REFERENCE TIES

Corner Index: **A.0-13.0**

Not to Scale

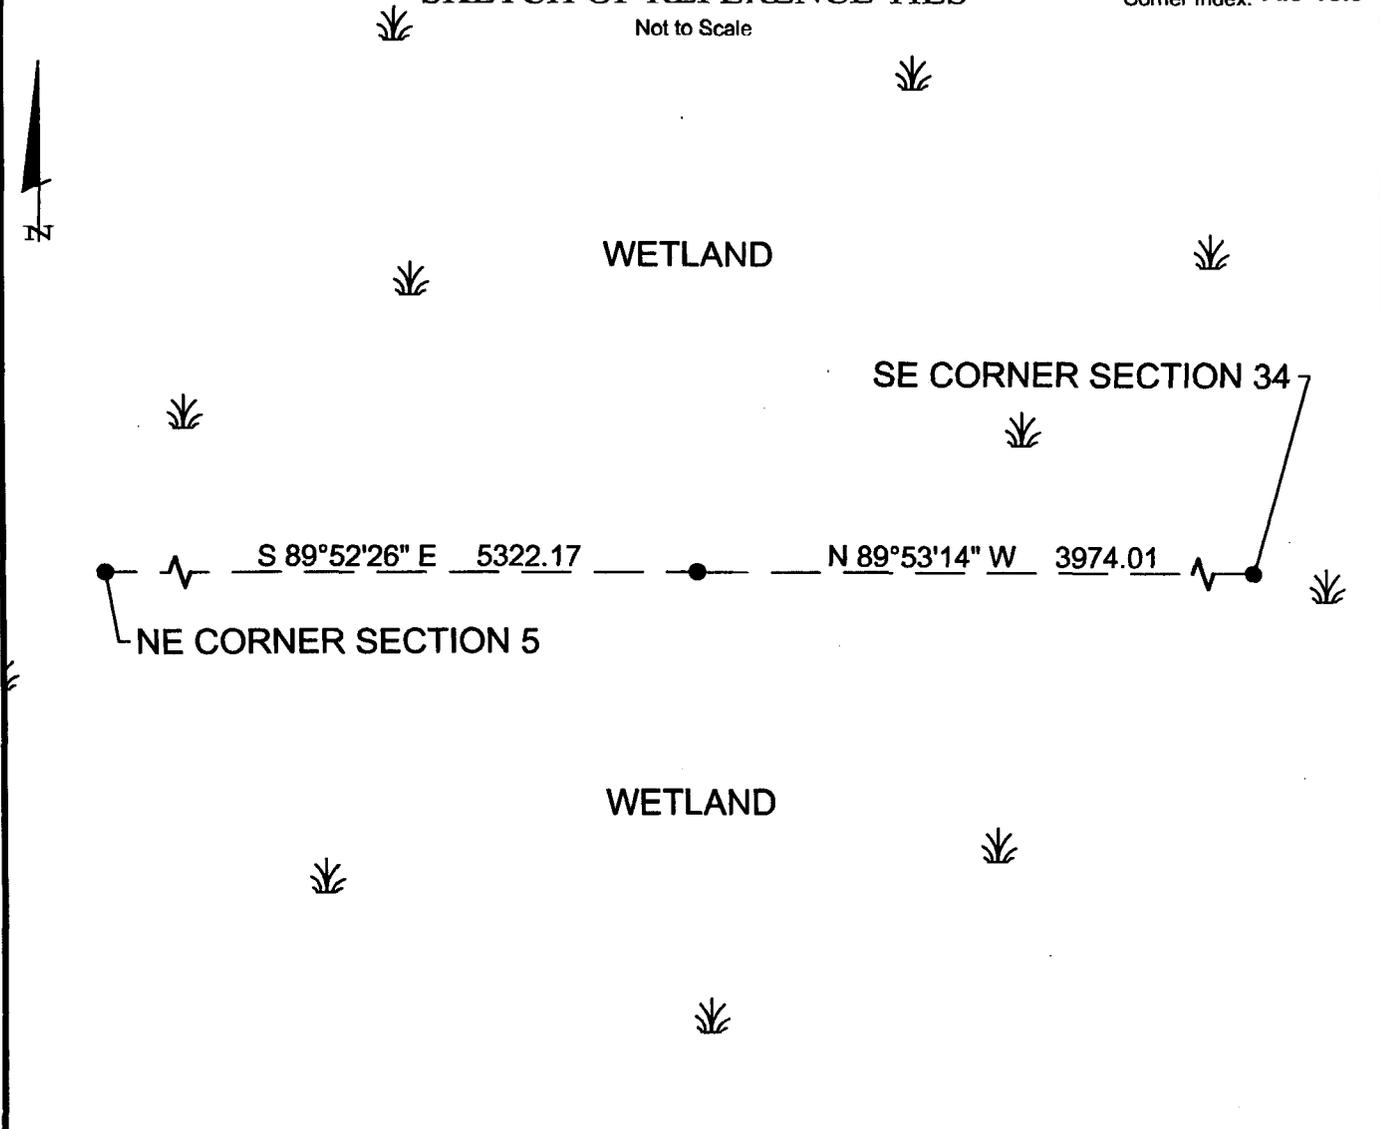

Statement of evidence for this corner position is on the back of this page

**A.0-13.0****Statement of Evidence****Northeast corner, Section 4, Township 136 North, Range 32
West, 5th Principal Meridian, Cass County, Minnesota**

- 1866 – Oscar Garrison, US Deputy Surveyor originally established the closing corner position while surveying the interior subdivision lines of Township 136 North, Range 32 West. A wood post was set to mark the corner position, no ties near to witness. Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).
- 1916 – E.B. Horst, County Surveyors Record Book B pages 542-544, and in Curo Book 65, pages 61, set an iron monument proportionally and established the following witness:
W. Post S45°E 46.67 feet and W. Post S45°W 46.67 feet.
Information on file in the (CCHD/SO).
- 2018 –A Stonemark survey crew searched for and found no evidence of the corner. Set ½”x 18” iron pipe with plastic cap marked RLS 41002 by single proration utilizing monuments as shown on front of this certificate and established ties also as shown as perpetuation of this corner.

County Coordinates (Cass County North)

Northing 272854.2440

Easting 436786.9200