



A000643887

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:49:29 AM

AS DOC #: A000643887

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 148823

Page 1 of 2 A000643887

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 8-30-2018 License No: 41002
41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ .M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO.

NORTH QUARTER Corner of Section 32, Township 139, Range 26, 5th P.M.

On 5/9/2018 found a 1.5" IRON PIPE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: V.0-7.0

Not to Scale

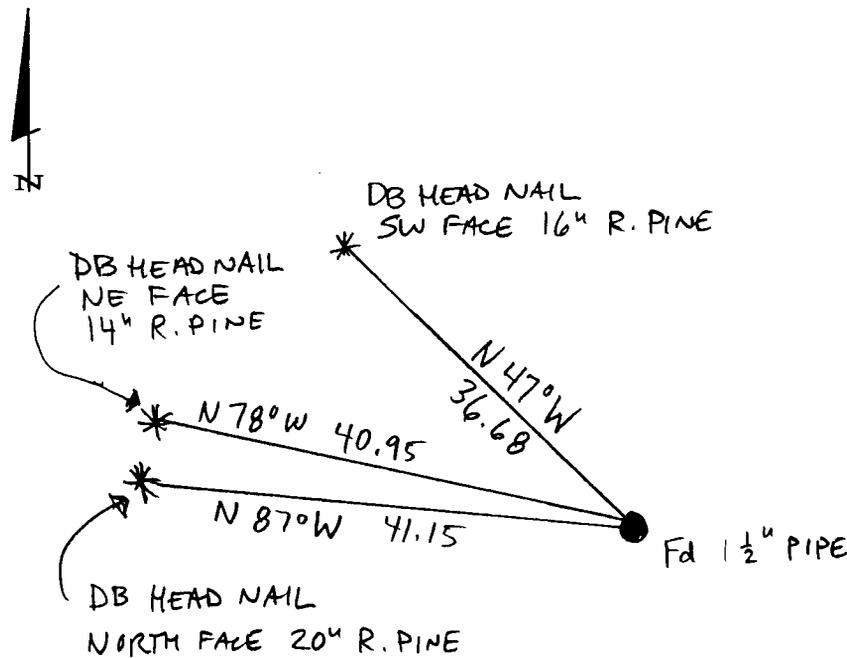

29
32

Statement of evidence for this corner position is on the back of this page



V.0-7.0

Statement of Evidence

**North Quarter corner, Section 32, Township 139 North, Range 26
West, 5th Principal Meridian, Cass County, Minnesota**

1863 – Johnson and Thornton, US Deputy Surveyors originally established this corner position while surveying the interior subdivision lines of Township 139 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses:

6” W. Birch N 34° W 16 links
5” W. Birch S 73° W 28 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1916 – John Curo, County Book B, P187-190, set 4x4x48” N. Pine post proportionally. Returned later and set a 2x48” iron boiler tube with the following witnesses:

10” N. Pine S 62° 20’ W 40.60 feet

Information on file in the (CCHD/SO).

1936 – CCC, Washburn Lake Book 3, P34, at 40 chains from East, found old blazed trees and set stake.

Information on file in the Washburn Lake Forestry Station.

1986 – Wallace Buckler, LS 9672, map shows monument in place.

2018 – A Stonemark survey crew found a 1.5 inch iron pipe 1.4 feet above ground, and is witnessed with the ties shown on the front of this certificate. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

County Coordinates (Cass County North NAD83/96)

Northing 105310.570

Easting 554717.220