



A000650933

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

6/27/2019 10:32:57 AM

AS DOC #: A000650933

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY NG Dep TX#: 154500

Page 1 of 2  
A000650933


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to the Meander Corner on the south shore of Cass Lake in Section 13,  
Township 145 N., Range 31 W., 5th P.M. County of Cass, State of Minnesota

At the corner location shown on the sketch :

- On \_\_\_\_\_ found \_\_\_\_\_
- left monument as found     lowered monument     removed monument (explain)
- On May 7, 2019 set 2"x48" iron pipe with 3 1/4" bronze cap, stamped as shown, top 8" above ground, behind ice heave on south shore of Cass Lake

#### SKETCH OF REFERENCE TIES (NOT TO SCALE)

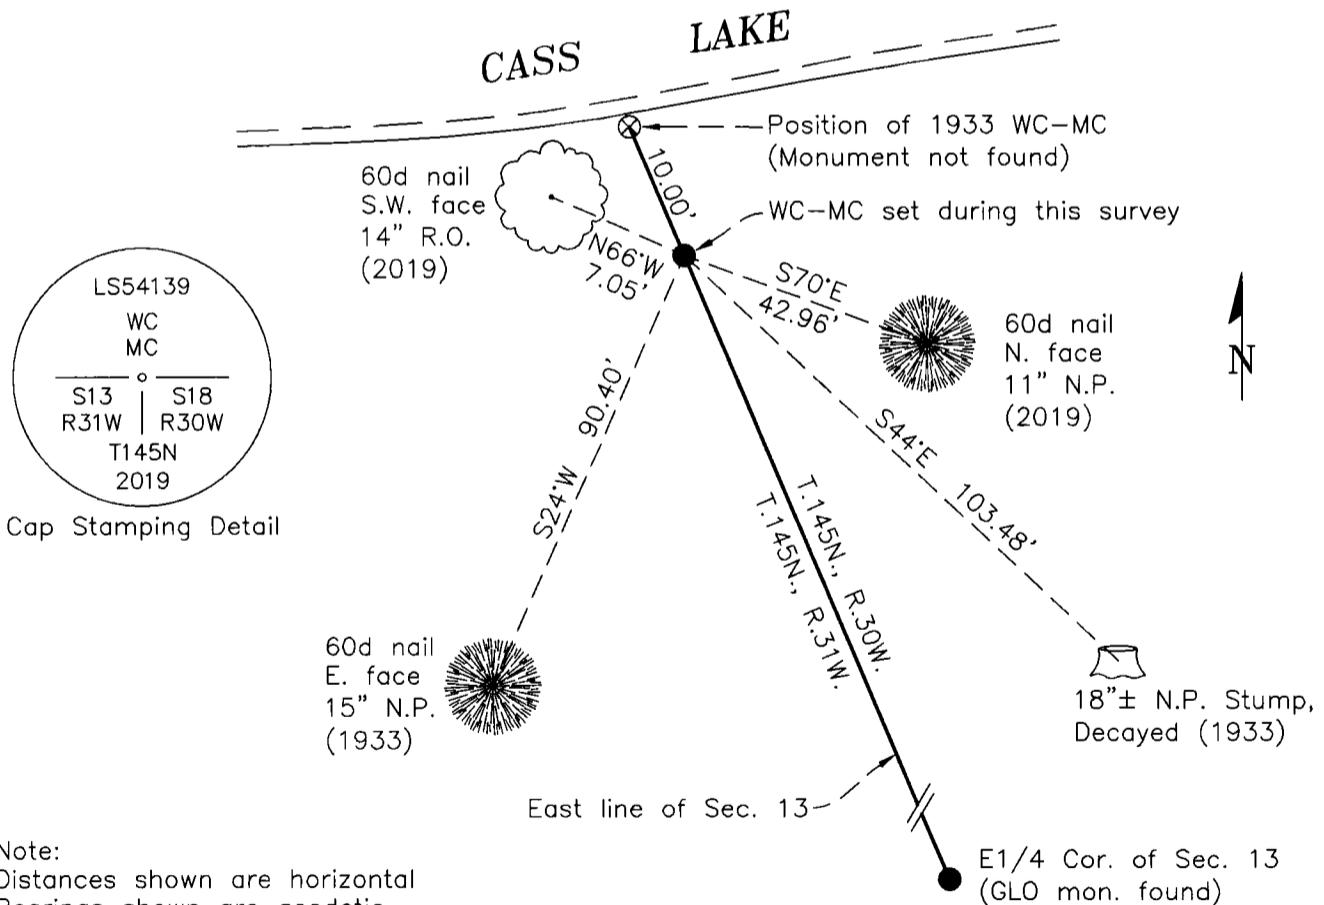

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota.

*Aaron J. Skattum*  
Aaron J. Skattum  
MN License No. 54139

5/30/2019  
Date

Cass County Coordinates  
(North Zone, 2011 Adj.)  
N: 309,471.039  
E: 418,571.745

GCDB ID No. 700456  
Corner Index No. K.1-25.0



Corner Index No. K.1-25.0

**STATEMENT OF EVIDENCE**

**Witness Corner to the Meander Corner on the south shore of Cass Lake  
Sec. 13, T.145N., R.31W., 5th P.M., Cass County, MN**

1873 P.H. Conger, U.S. General Land Office, originally established the meander corner on the south shore of Cass Lake, on the east line of Section 13 while surveying the exterior lines of T.145N., R.30W., and set wood post to mark the meander corner position with the following witnesses:

8" White Oak	S63°E	8.58'	new BT
3" Poplar	S37°W	50.16'	new BT

1900 T.M. Fowble, of U.S. Engineers, indicates original corner recovered and shown on map of Lake Winnibigoshish Reservoirs Map

1933 W.W. Bandy, U.S. General Land Office, during a dependent resurvey of the west boundary of T.145N., R.30W., does not note finding any original corner evidence. On the S. shore of Cass Lake, Mr. Bandy set a 6"x24" cylindrical concrete monument with a 3 1/2" brass tablet as a witness corner to the meander corner and established the following bearing trees:

25" Norway Pine	S43°E	112.86'	new BT
12" Norway Pine	S20.5°W	97.02'	new BT

1934 J.A. Gjelhaug, C.C.C. engineer (Form 874-9, Chippewa N.F. records) found brass capped cement monument, up 5" at south shore of Cass Lake and noted the following witnesses:

20" Norway Pine	S42.5°E	113.85'	1933 BT found
10" Norway Pine	S20.5°E	96.36'	1933 BT found

2019 A. Skattum, U.S. Forest Service, (per Land Line Book 30, page 67, Chippewa N.F. records) found no evidence of the 1933 corner monument (computed WCMC position falls on shore area badly disturbed by ice & wave action), but was able to positively identify both GLO bearing trees which were used to re-establish the 1933 WCMC corner position, and set the monument as described on the face of this document. The monument set during this survey is located on the section line, at a position 10.00 feet southerly of the 1933 WCMC to protect it from further shoreline erosion. The following ties were made:

25" Norway Pine	S44°E	103.48	1933 BT, now 18"± decayed stump, scribing visible (tie to 2019 monument)
15" Norway Pine	S24°W	90.40'	1933 BT, now standing, live, scribing visible (tie to 2019 monument)
11" Norway Pine	S70°E	42.96'	new BT
14" Red Oak	N66°W	7.05'	new BT