



A000668742

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/28/2021 10:33:23 AM

AS DOC #: A000668742

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

By SF Dep TX#: 168663


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/16 Corner of Section 4/33, Township 145 N., Range 29 W., 5th P.M.
County of Cass, State of Minnesota

At the corner location shown on the sketch :

- On 05/04/2020 found 1" iron post with brass cap, marked as described in
1934 GLO field notes, its top flush with the ground and in good condition.
- left monument as found lowered monument removed monument (explain)
- On _____ set _____

SKETCH OF REFERENCE TIES (NOT TO SCALE)

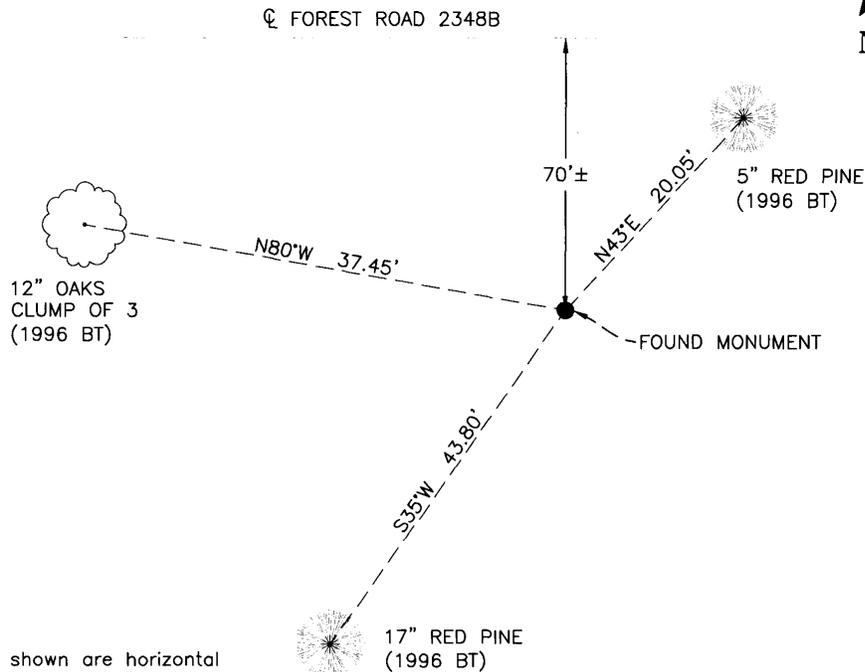

Note:
Distances shown are horizontal
Bearings shown are geodetic

Sheet 1 of 2

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota.

Aaron J. Skattum
Aaron J. Skattum
MN License No. 54139

12-28-2020
Date

Corner Index No. A.0-12.0
GCDB ID No. 360700

Cass County Coordinates
North Zone, NAD83(2011)
N: 322,574.048
E: 465,271.271





Corner Index No. A.0-12.0

STATEMENT OF EVIDENCE

East 1/16 Corner on the North line of Sec. 4, T.145N., R.29W., 5th P.M., Cass County, MN

- 1873 P.H. Conger, US General Land Office did not set this corner during his original survey of this line.
- 1934 H.D. Craig, US General Land Office, during a dependent resurvey of the north line of this township, set a 1"x36" iron post with brass cap at proportionate distance and noted the following ties:

12" Pine snag S39.5°W 62 links (40.92')
 No other trees available for marking

Information on file at the MN Historical Society, St. Paul, MN. Copies filed with the Cass County Highway Department/Surveyor's Office (CCHD/SO).

- 1996 R. Main, US Forest Service, (Corner Book 1, page 9, USFS Records) found the GLO iron monument and noted the following ties:

12" Pine snag	S39.5°W	40.92'	1934 BT, found snag with scribe
5" Red pine	N43°E	20.05'	New BT
17" Red pine	S35°W	43.80'	New BT
8" White oak	N80°W	37.45'	New BT
Signpost	West	1.1'	New 8' long steel signpost set

- 2020 A. Skattum, US Forest Service, (Land Lines Book 30, page 77, USFS Records) found the GLO iron monument, 2" below ground, leaning slightly north. The monument's movement may have been intentional or by natural causes. The center of the brass cap was used as the corner position, from which the following ties were measured:

12" Pine snag	S39.5°W	40.92'	1934 BT, now burnt stump
14" Red pine	N43°E	20.05'	1996 BT, good condition
23" Red pine	S35°W	43.80'	1996 BT, good condition
12" White oak	N80°W	37.45'	1996 BT, good condition, tie is to middle of a clump of 3 oaks
Steel signpost	West	1.1'	1996 steel signpost in place

US Forest Service records cited above are on file at the Chippewa National Forest Supervisor's Office, Cass Lake, MN.