



A000670646

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/26/2021 12:32:59 PM

AS DOC #: A000670646

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 170246

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA
CONTAINED HEREIN WAS PREPARED BY ME OR UNDER
MY DIRECT SUPERVISION.

Kary T. Carlson 3/25/2021
KARY T CARLSON DATE

LICENSE NO. 40991

- LAND SURVEYOR PROFESSIONAL ENGINEER
- COUNTY SURVEYOR COUNTY ENGINEER

NAD 1983 (1996 HARN) CASS COUNTY NORTH ZONE COORDINATES
N= 333292.836 E= 450652.302 US SURVEY FT
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. R-1,2, MEANDER CORNER OF SECTIONS 19 & 30, TOWNSHIP 146, RANGE 29, 5TH P.M.
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 1/14/2021 FOUND A(N) GLO Brass capped monument in a concrete cylinder.
- LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
- ON _____ DATE PLACED A(N) _____

SKETCH OF REFERENCE TIES

DECLINATION 0°
SKETCH NOT TO SCALE




MONUMENT MARKED:



A 60d spike and washer in the base of a 13" Oak.

BELTRAMI COUNTY

The GLO survey of 146-29 and the Dependent Re-surveys of 146-29 and 146-30 refer to this position as being .75 chains easterly of the northeast corner of Section 25, 146-30.

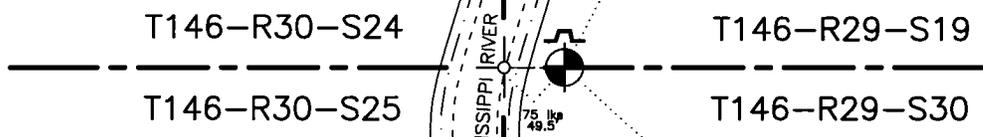

CASS COUNTY

Page 1 of 2

A000670646



STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

STATEMENT OF EVIDENCE: Meander Corner of Sections 19 & 30, East shore, Township 146 North, Range 29 West, of the 5th Principal Meridian.

1875; This corner was originally established by B.C. Baldwin, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are available on the BLM website. These Field notes indicate a wood post was set to mark this corner position, which was witnessed by:

Norway Pine,	18", North 84° East,	31 links,	20.46 feet;
Norway Pine,	18", South 51° East,	27 links,	17.82 feet:

1933; (May) A Dependent Resurvey of a portion of T146N-R30W was performed by Cadastral Surveyor Hal D. Craig of the BLM. Mr. Craig set a brass tablet embedded in a cylindrical concrete monument from the remains of the GLO witness trees. The notes are quite confusing here. The notes for the re-survey of 146-30 says to refer to the re-survey of 146-29 performed in 1934. However, the notes for the re-survey of 146-29 says to refer to the notes for the re-survey of 146-30. Therefore, I don't know what was recovered or if any additional witnesses were established.

2021; (January) Itasca County Department of Surveying and Mapping personnel C. Hendershott and T. Lasecki recovered the 1933 monument leaning on the slope of the bank of the Mississippi River. The monument was excavated to its base and then plumbed. Geodetic coordinates were established on the monument using a Fast Static observation. This information is found in the Itasca County 146-29 Field Book 2, page 35. The established witnesses are as shown on the face of this certificate.

The chain of history indicates that this position is a direct perpetuation of the corner as established in 1873.