

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/16th Corner of Section 8&17, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 6/19/80 found a GLO brass cap monument in place as set in 1918.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

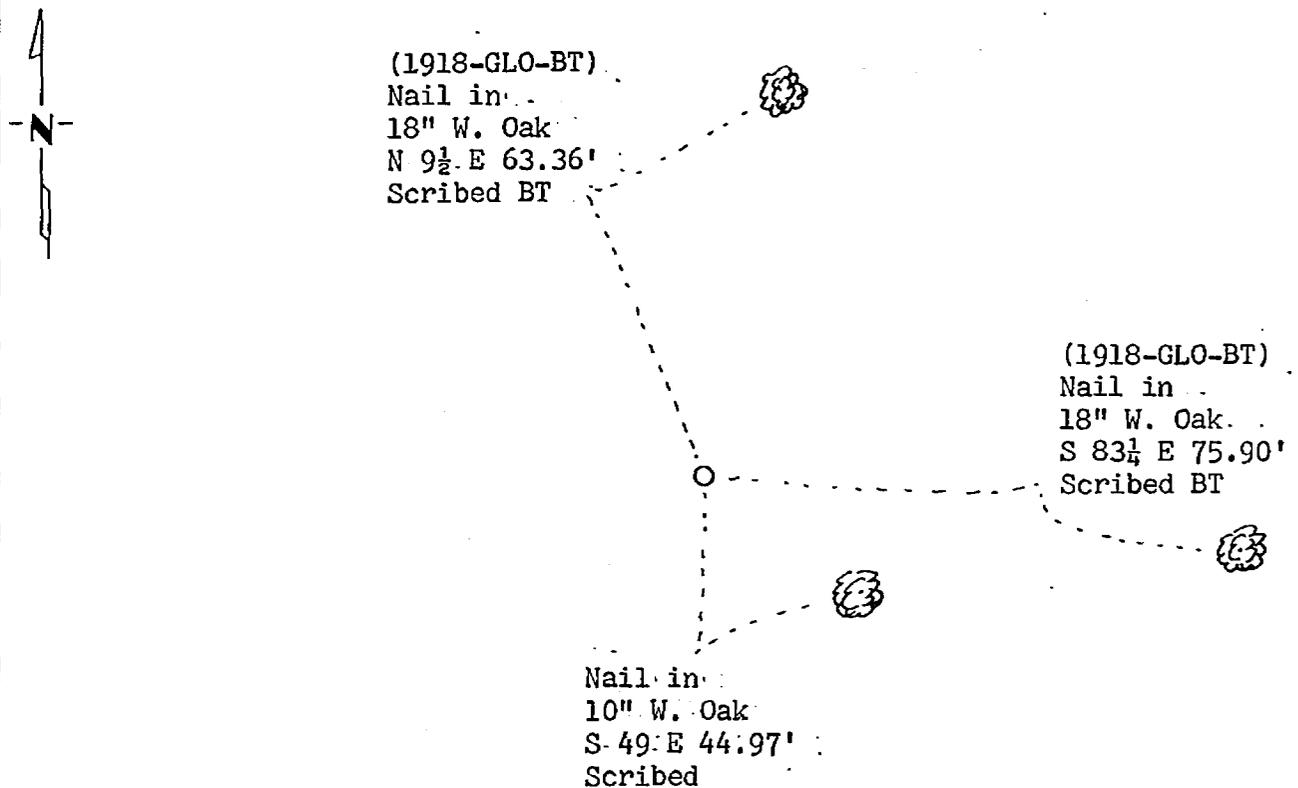

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 260987

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay H. Steenman 12-15-81
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:21 A.M. on the 31 day of Dec. A.D., 1981

County Recorder Benedict Herdicks

By MS, Deputy

DOCUMENT NO. 260987

Statement of Evidence:

- 1918 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 12" W. Oak N $9\frac{1}{2}$ E 96 links and 10" W. Oak S 83-15 E 115 links.
- 1966 USFS technician L. Witthoeft found a GLO brass cap monument in place.
- 1980 USFS technician Gary Brama found the GLO brass cap monument in place and both bearing trees alive. One new bearing tree was marked and the two GLO bearing trees were rescribed with "BT". Steel sign posts were set east, west, and north of the corner.
- 1981 On Dec. 8, I visited corner and found items as per 1980 USFS report. Neither of the GLO bearing trees had been cut open and there were no visible scars.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.