

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 15, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 12/16/80 found a GLO brass cap monument in place as set in 1918.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

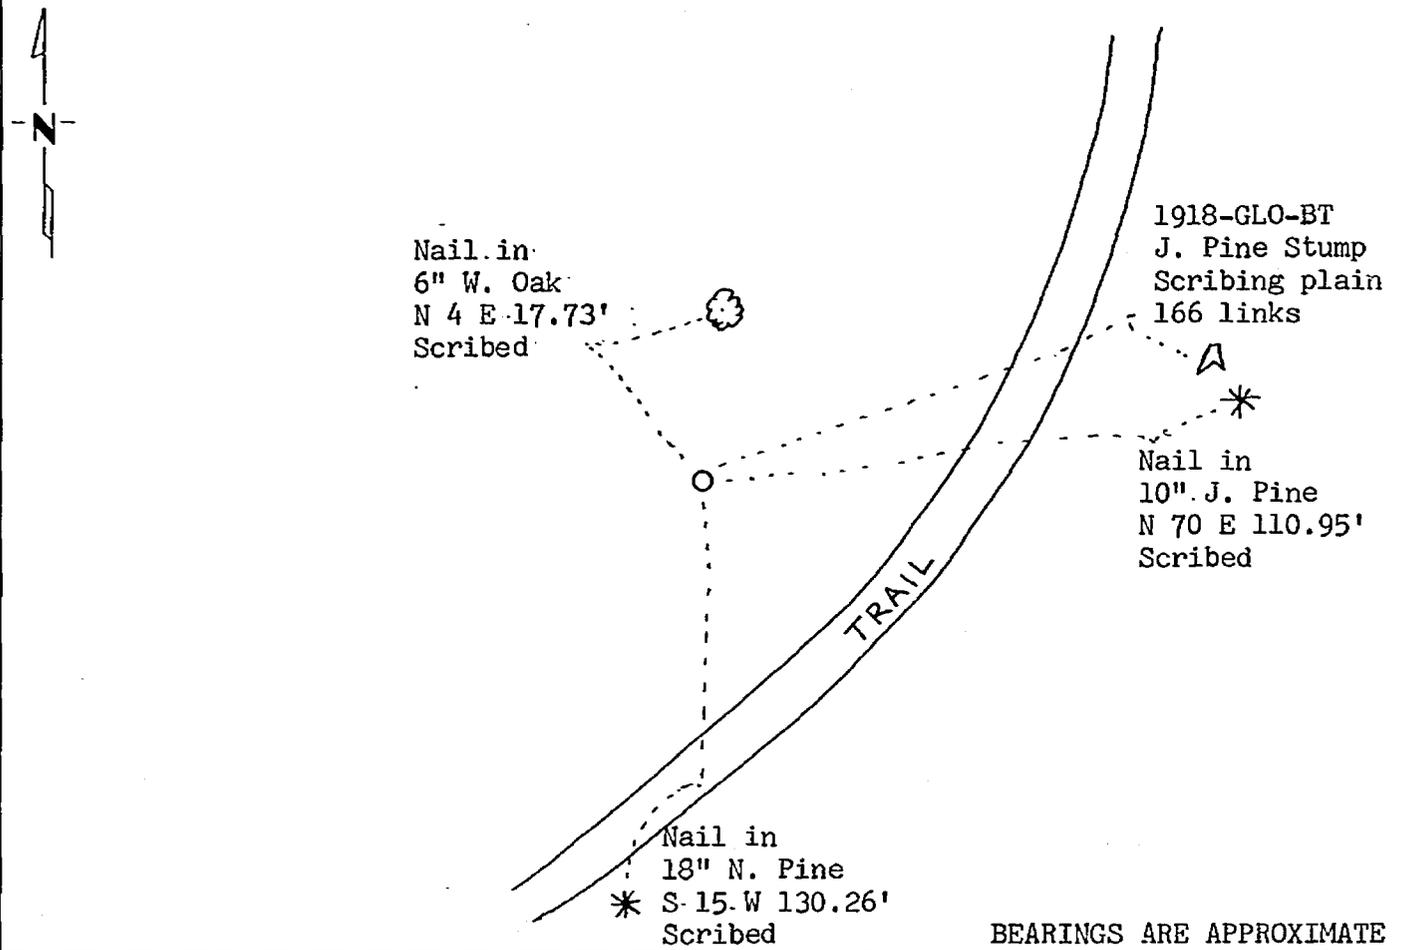

Statement of evidence relative to this corner location is on back of page.

260996

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary A. Stevenson
SIGNATURE

12-15-81
DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:34 A.M. on the 31 day of Dec, A.D., 1981

County Recorder Burdah Hendricks

By MS, Deputy

DOCUMENT NO. 260996

Statement of Evidence:

- 1918 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 8" J. Pine N 68-30 E 166 links and 6" J. Pine S 61-30 W 53 links.
- 1970 USFS technician L. Witthoef found GLO brass cap in place and stump of NE bearing tree.
- 1980 USFS technician W. Olson again found GLO brass cap in place and took 3 new bearing trees (marked) and are shown on this certificate.
- 1981 On Dec. 8, I visited corner and found items as per 1970 and 1980 USFS reports. Stump of NE-GLO bearing tree has scribe marks plain.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.