

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N ¼ Corner of Section 2, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 10-20-81 found a 1"x36" iron pipe monument with brass cap standing in good condition

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

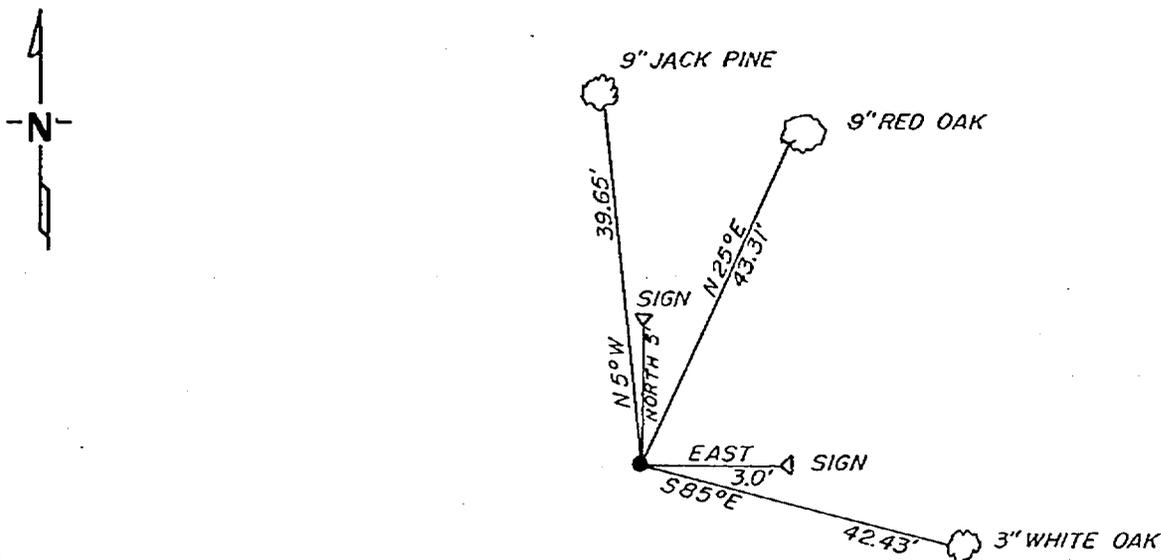

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Coia 12-8-81  
SIGNATURE DATE

Registration No. 11395

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

262603  
OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:41 A.M. on the 7 day of May A.D., 1982

Register of Deeds Brenda Hendrichs  
By MS, Deputy

DOCUMENT NO. 262603

In 1917, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the N  $\frac{1}{4}$  corner.

On October 20, 1981, Walter Curo and Paul Johnson find the brass cap monument standing in good condition. A dead and fallen pine with a BT tag on it sets N 17 E 18.10. We don't find any other BT's. We make new BT's as shown on the front.