

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SW 1/16 Corner of Section 2, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-23-81 found a 1"x36" brass cap monument tipped over in swamp, stand it up straight, find scribed stumps of both original monuments
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

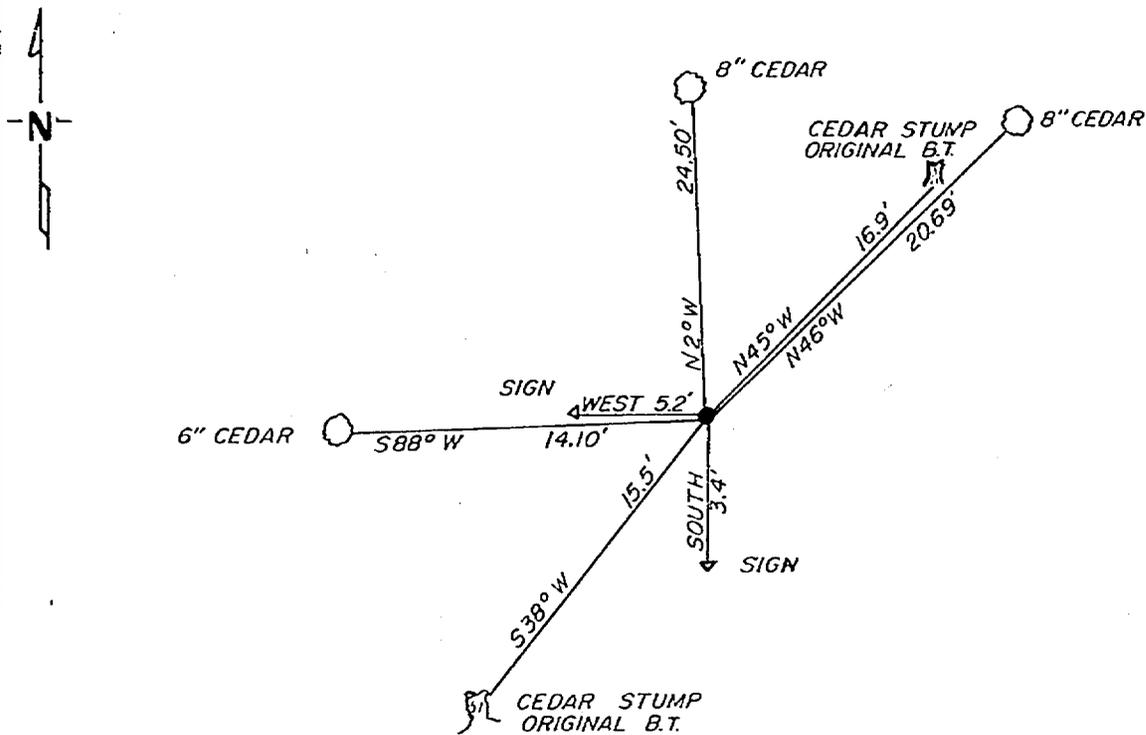

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cross 12-8-81
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

262610
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:00 A.M. on the 1 day of May A.D., 1982

Register of Deeds Beneah Handrich

By MS, Deputy

DOCUMENT NO. 262610

In 1917, Earl G. Harrington, a US surveyor, set a 1"x36" iron pipe with brass cap for the SW 1/16 corner from which he made the following BT's: A 12" cedar N 44 3/4 E 25 LKS and a 6" cedar S 38 W 23 LKS.

On October 23, 1981, Walter Curo and Paul Johnson find the brass cap monument lying down in the bog. Stand it up and reset it from the scribed stumps and make new BT's as shown on front.