

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

AP 2 TR 1702 Corner of Section 2, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9-14-81 found a 1"x36" iron pipe with brass cap standing in good condition.

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

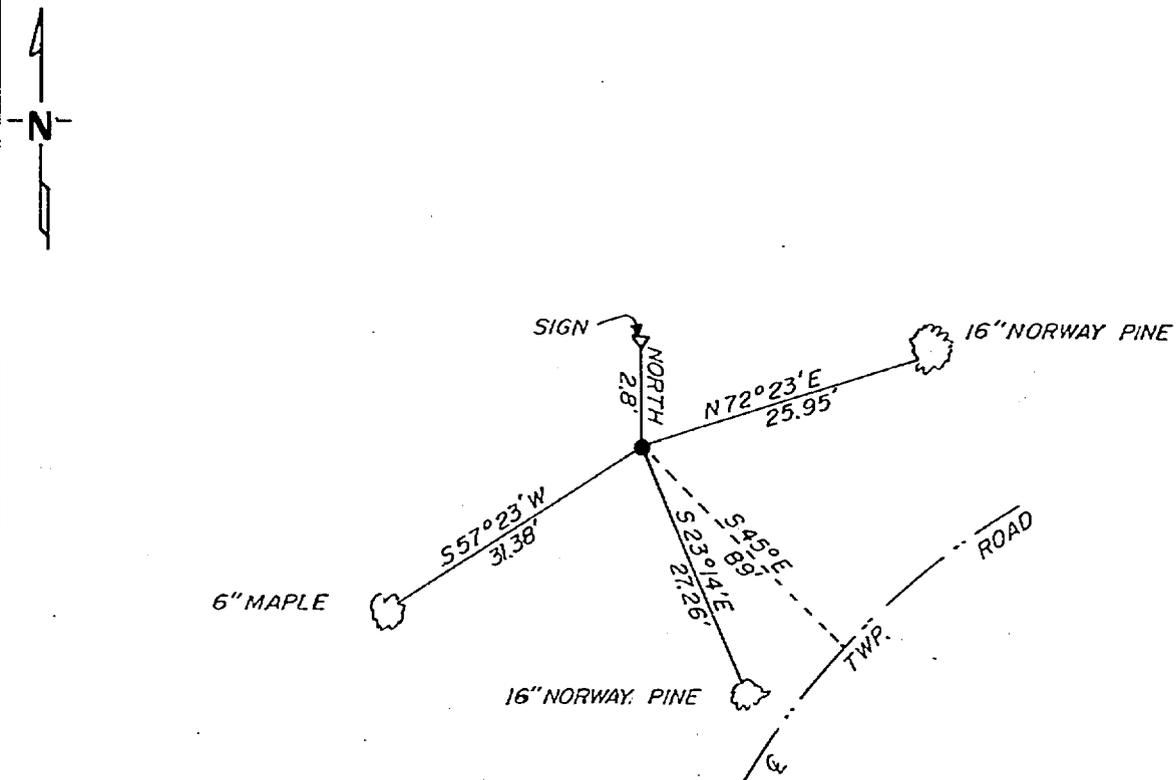

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. [Signature] 12-8-81
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

262630
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 1:40 P. M. on the 7 day of May A.D., 1982

Register of Deeds Bonnie Hardin

By M S, Deputy

DOCUMENT NO. 262630

In 1917, Earl G. Harrington a US Surveyor set a 1"x36" iron pipe with brass cap for AP 2 TR 1702 and AP 3 TR 1275. No BT's were made.

On September 14, 1981, Walter E. Curo and Paul Johnson find the brass cap monument standing in good condition from which we made BT's as shown on front.