

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER EAST SIXTEENTH Corner of Section 20, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/24/80 found a GLO brass cap monument as set in 1919.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

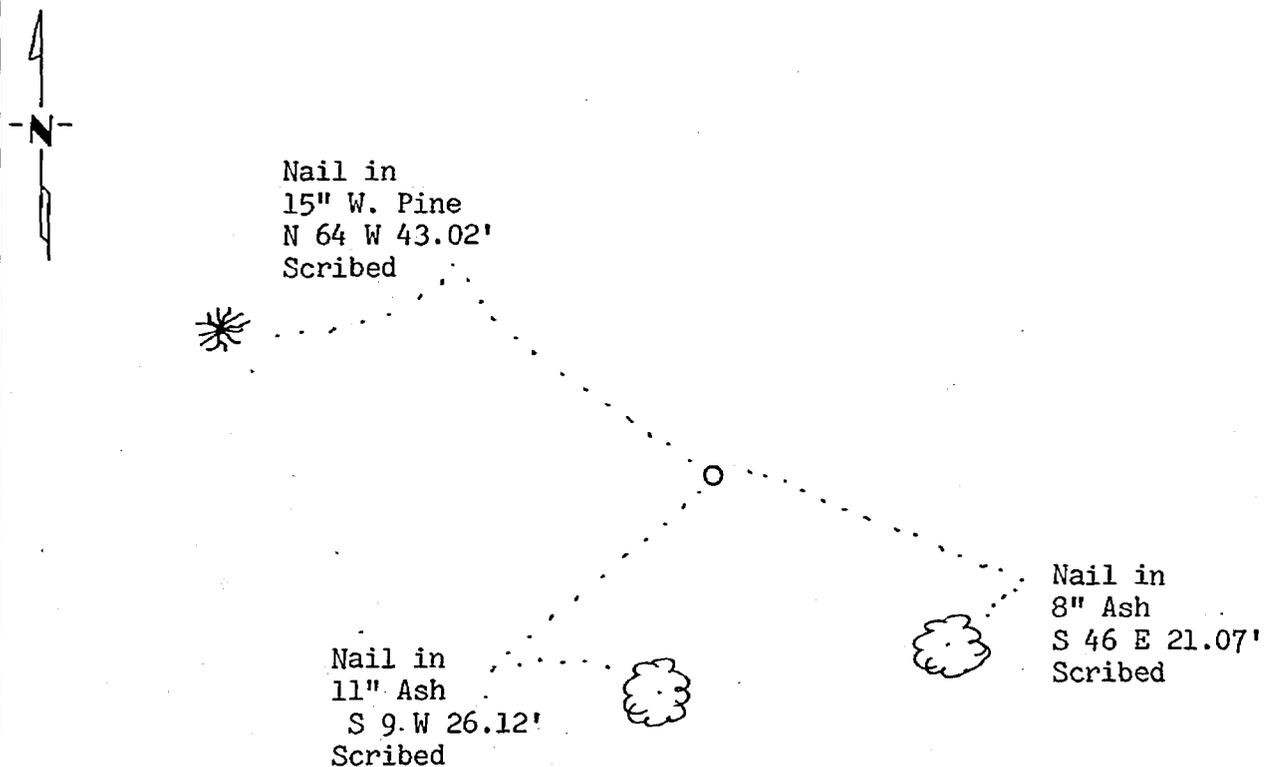

BEARINGS ARE APPROXIMATE:

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dary H. Stevenson 9-15-82  
SIGNATURE DATE

Registration No. 12684

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

265253  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:50 A.M. on the 29 day of Sept. A.D., 1982

County Recorder Bertha Hendrichs

By MS Deputy Recorder

DOCUMENT NO. 265253

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 15" Poplar S 3 W 58 links and 6" Balsam S. 89-30 W 127 links.
- 1980 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 14". The following bearing trees were found: Rotten Balsam stump West 83.8' and Rotten Poplar stump S 3 W 38.9'. Three new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.