

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SE 1/16 Corner of Section 7, Township 143, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 2-23-1983 found a 1" iron pipe with brass cap
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

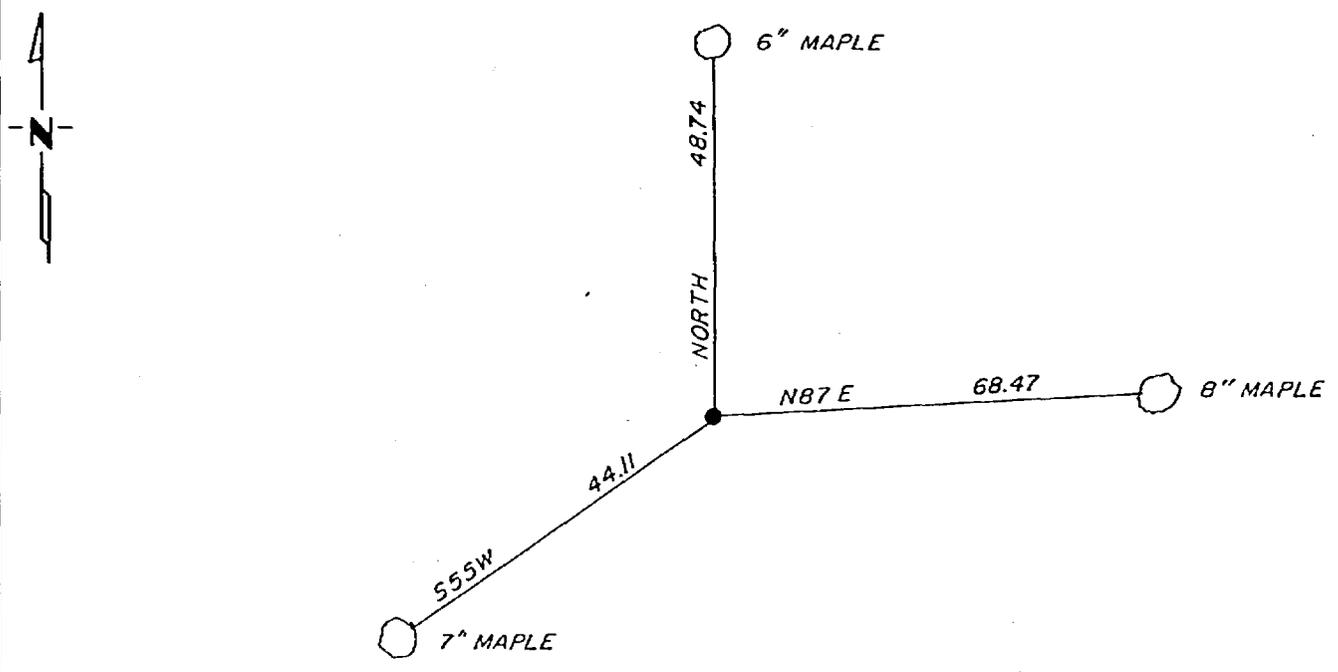

Statement of evidence relative to this corner location is on back of page. 268846

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

W. H. E. Cass 3-18-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:15 P .M. on the 18 day of May A.D., 19 83

Register of Deeds Clouline Koyler
By MS, Deputy

DOCUMENT NO. 268846

Statement of Evidence:

In 1921, Earl Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the SE 1/16 corner from which he marked the following bearing trees, a 12" basswood N 77-1/2 E 12 links and a 12" maple S 66-45 E 51 links.

On 2-23-1983, Walter E. Curo, a registered land surveyor and Ken Metcalf found the pipe with brass cap standing in good condition. The 12" basswood is now a 16" dead snag and the 12" maple is a 16" tree. We mark new bt's as shown on the front.