

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North
 Witness, Quarter Corner of Section 3, Township 139, Range 29, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 7/17/81 found a 2" iron pipe 1.5' above ground
DATE

left monument as found, lowered monument; removed monument (explain)

On 7/27/84 placed a 36"x2"x2" square metal post with 2-3/4" aluminium cap stamped W.P. 0.50 feet above ground
DATE

SKETCH OF REFERENCE TIES

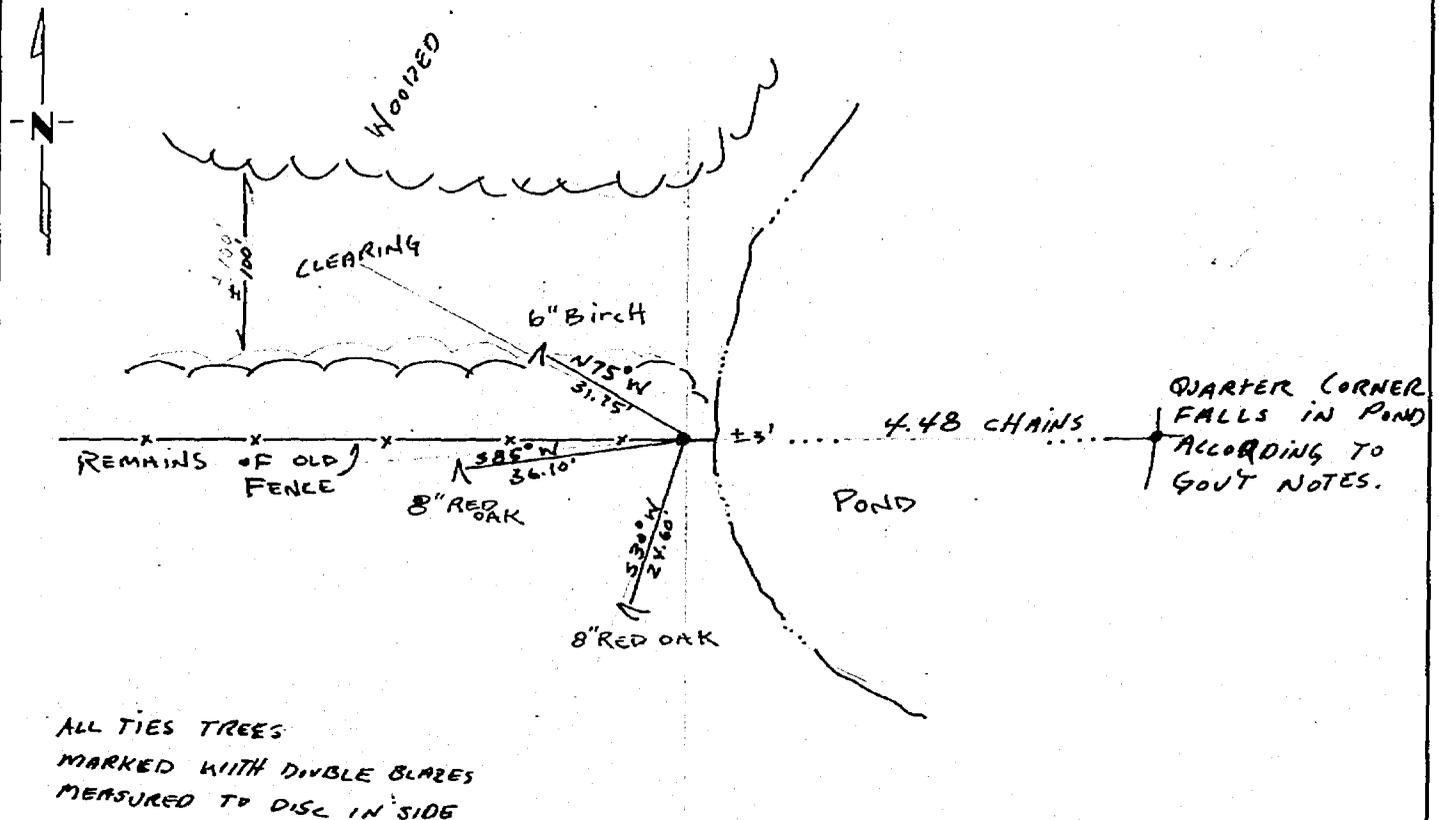

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Myron L. Sandaker 7/30/84
SIGNATURE DATE

Registration No. 7452

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

276687
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 31 day of July A.D., 1984

County Recorder Claudia Kaylon
 By MS, Deputy

DOCUMENT NO. 276687

Statement of Evidence:

Original Government Survey

Corner set in 1865 by Walker & Wright

in 1969 R.F. Schneider, Registered Land Surveyor #5740, used 2" iron pipe as WC in survey of Section 34, Township 140, Range 29.

In 1973 Myron Landecker, Registered Land Surveyor #7452, used same 2" I.P. corner in survey of Section 3, Township 139, Range 29

In 1976 R.F. Schneider reused same corner

On 3/26/79 Myron Landecker reused same corner to establish North line of Section 3, Township 139, Range 29

On 11/25/80 Landecker again used corner in Plat of Trednuck Sand Lake Addition

On 7/17/81 Landecker again used corner to provide evidence for position of Northwest corner of Section 3, Township 139, Range 29

In 1920 J. Flynn located corner from original BT's 295.7' West of true corner, Book C, page 359.

Myron Landecker believes this corner to be a perpetuation of the original Government corner as established from previous surveys.