

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


CW 1/16 Corner of Section 12, Township 143, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8-8-83 found a 1" x 36" IRON PIPE MONUMENT WITH BRASS CAP
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

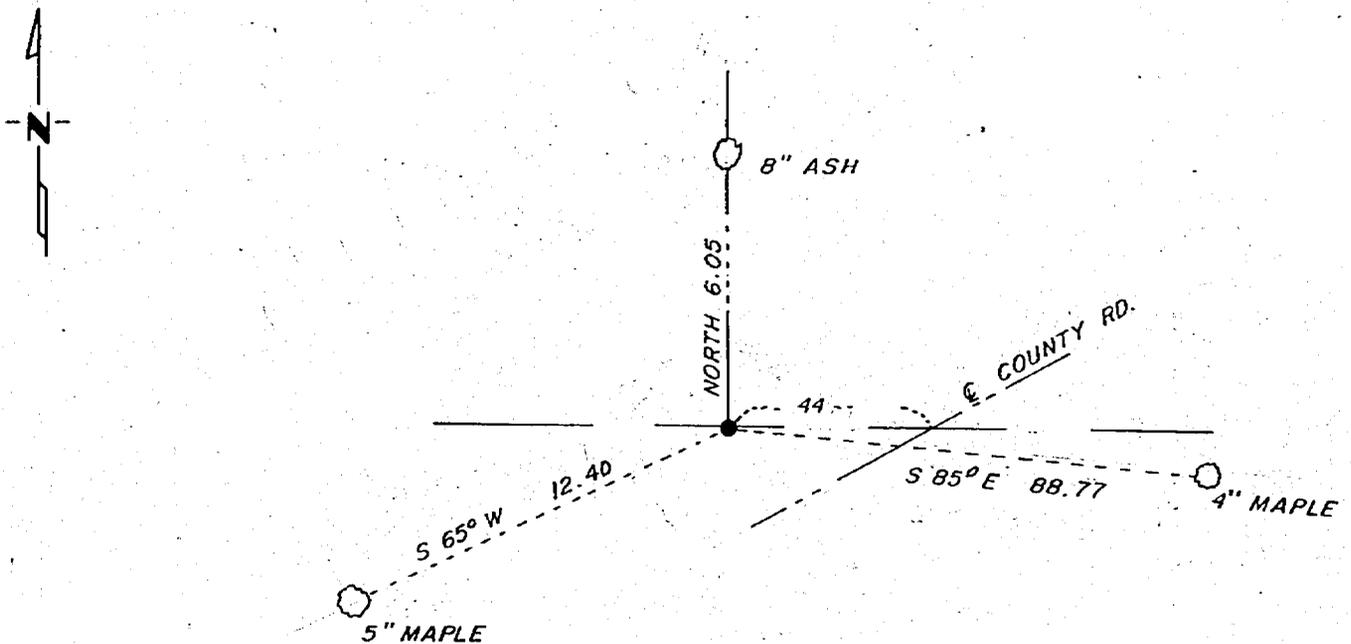

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Curo 8-16-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279161

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:45 A.M. on the 3 day of Dec. A.D., 19 84

Register of Deeds Chandler Kayler

By Ms, Deputy

DOCUMENT NO. 279161

Statement of Evidence:

IN 1924, EARL G. HARRINGTON, A U.S. CADAstral ENGINEER, SET A 1" x 36" IRON PIPE WITH BRASS CAP FOR THE CW 1/16 CORNER OF SECTION 12 FROM WHICH HE MARKED THE FOLLOWING BEARING TREES: ELM 8 NORTH 75 DEGREES WEST 76 LKS AND A POPLAR 3" SOUTH 19 DEGREES 30 MINUTES WEST 51 LKS.

ON 8-8-83, WALTER E. CURO, KEN METCALF, AND GREG CURO FOUND THE 1" x 36" IRON PIPE WITH BRASS CAP STANDING IN GOOD CONDITION WE FIND NO TRACE OF ORIGINAL BEARING TREES. WE MARK NEW BEARING TREES AS SNOWN ON FRONT.