

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southwest Corner of Section 8, Township 141N, Range 31W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 9-30-84 found a 2½ inch capped monument in good condition,  
DATE  
 stamped as shown up 0.8 foot.
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Declination: 6° East

SKETCH OF REFERENCE TIES  
NOT TO SCALE

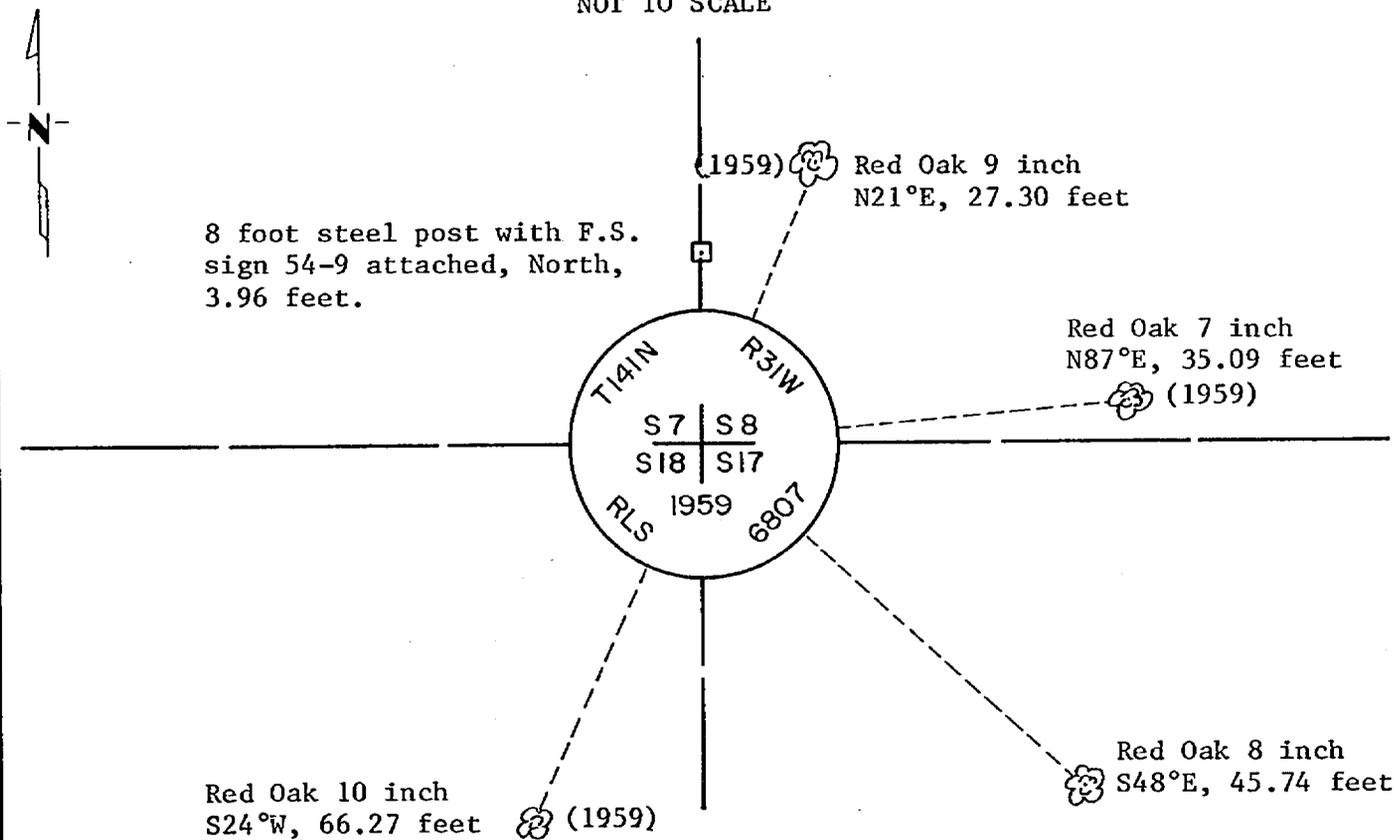

NOTE: All bearing trees are painted red and marked with F.S. sign No. 54-3 with a nail in base, double blazed and scribed.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. O'Hara 2-1-85  
SIGNATURE DATE

Registration No. 6807

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

280563  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:55 A.M. on the 27 day of February A.D., 1985

County Recorder Claudia Kayler  
 By MS, Deputy

DOCUMENT NO. 280563

Statement of Evidence:

Southwest Corner Section 8, Township 141 North, Range 31 West, 5th Principal Meridian.

- 1873 P.H. Conger, U.S. Deputy Surveyor, set a post for this Section Corner in his subdivision of the Township between August 5, 1873 and August 30, 1873. As references he scribed:
- |       |        |       |                       |
|-------|--------|-------|-----------------------|
| Oak   | 4 inch | N50°E | 41 links (27.06 feet) |
| Aspen | 4 inch | N64°W | 34 links (22.44 feet) |
| Aspen | 3 inch | S40°W | 32 links (21.12 feet) |
| Aspen | 3 inch | S61°E | 20 links (13.20 feet) |
- 1915 J. Curo, Cass County Surveyor, in his survey of Section 7, said corner was in and set a 2½ inch by 48 inch galvanized iron pipe with cap. No ties metioned on County Resurvey Plat "E-51".
- 1929 MN/DOT right of way map indicates a 2 inch iron pipe with cap 314.5 feet west of center line and 240.2 feet north of center line.
- 1942 John Curo, County Book "D", page 296-297, recorded the following ties:
- |         |         |       |             |
|---------|---------|-------|-------------|
| J. Pine | 16 inch | N69°E | 74.50 feet  |
| J. Pine | 10 inch | S29°E | 134.30 feet |
| R. Oak  | 12 inch | S53°W | 72.80 feet  |
| Poplar  | 12 inch | N 2°W | 50.80 feet  |
- 1959 H. Curo, Cass County Surveyor, found monument set in 1915. He stamped cap and marked the following BT's, and filed a Corner Certificate.
- |        |         |          |            |
|--------|---------|----------|------------|
| R. Oak | 5 inch  | N3°01'E  | 27.25 feet |
| R. Oak | 4 inch  | N77°14'E | 35.10 feet |
| R. Oak | 10 inch | S26°W    | 66.50 feet |
- 1962 U.S.F.S. Corner Restoration notes indicate the monument and 1959 BT's found in good condition.
- 1984 Kelly M. Booge, under F.S. contract No. 53-6392-4-00994, made a through search for physical evidence of this corner on August 30 and found a 2½ inch stamped capped monument in good condition and three 1959 BT's. He returned January 4, 1985 and added additional references as shown on the sketch. This Certificate was made to update the 1960 Certificate, Document No. 16, in book of Corner Certificates in Cass County Recorder's Office.

Kelly M. Booge is an employee of Okerman Surveying, Inc.