

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 26, Township 144 N., Range 25 W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1-29-1985 placed a 5/8" by 8 feet long Aluminum Rod with 3" Aluminum Cap
DATE
stamped as shown up 1.00 foot

5° EAST Declination

SKETCH OF REFERENCE TIES
NOT TO SCALE

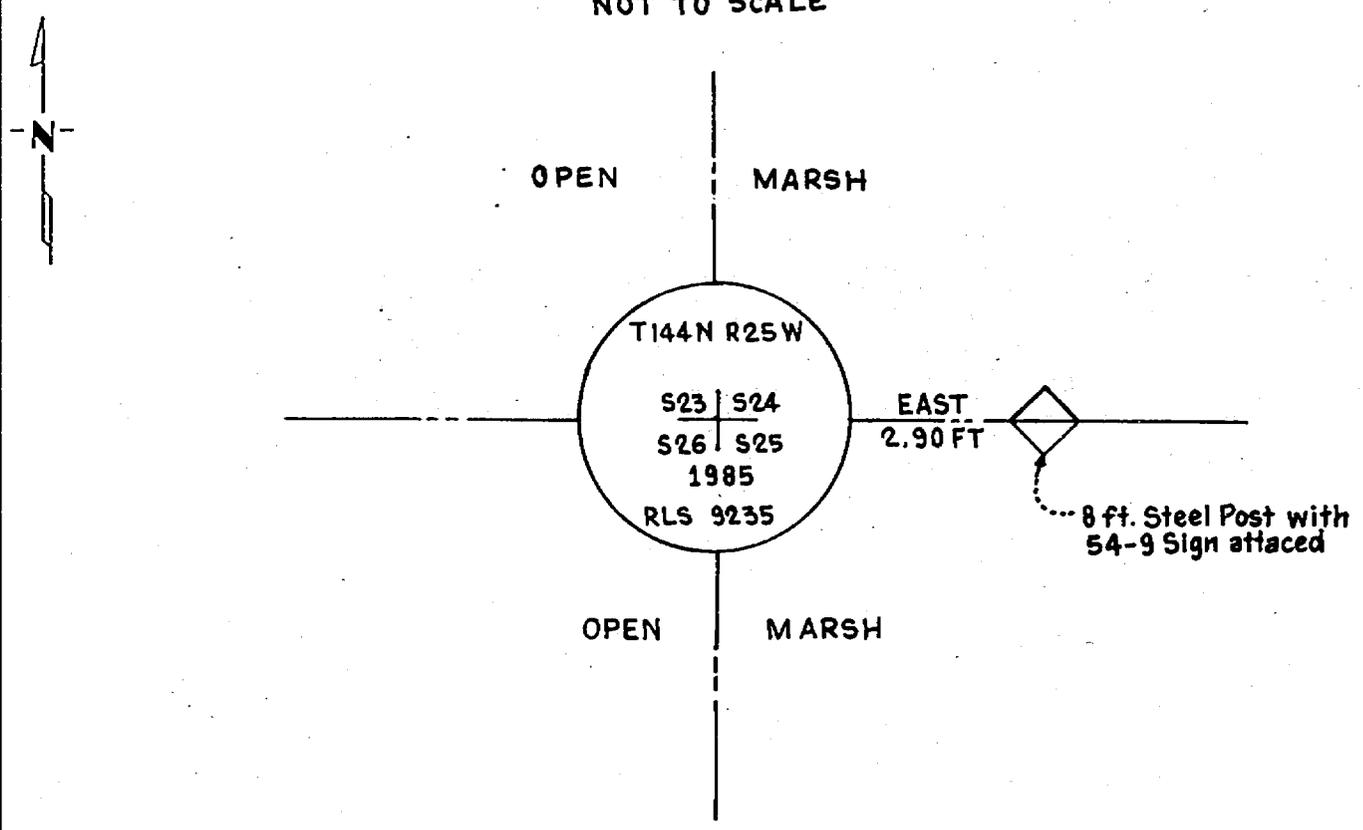

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parks 3/29/85
SIGNATURE DATE

Registration No. 9235

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

281964
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:40 A.M. on the 15 day of May A.D., 19 85

County Recorder Clairine Kaylor
By MS, Deputy

DOCUMENT NO. 281964

Statement of Evidence:

R21

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

- A 4" Tamarack that bears N70°E a distance of 50 links [33.00 feet]
- A 5" Tamarack that bears S18°E a distance of 39 links [25.74 feet]
- A 5" Tamarack that bears S21°W a distance of 69 links [45.54 feet]
- A 5" Tamarack that bears N84°W a distance of 8 links [5.28 feet]

In 1900, A Map of survey by the Corps of Engineers shows that they found the corner.

On July 31, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail. There are a few small Tamarack stubs in this area. This search area is now an open Marsh.

On January 29, 1984, an additional search was made by Advance prior to reestablishing this corner by Obliterated methods by using coordinate position determined from Corps of Engineers Survey done in 1900.