

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southwest Corner of Section 30, Township 144N, Range 25W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 5-4-1984 found a Bridge spike with washer down 3.6 feet at
E E DATE roads
 - left monument as found, lowered monument, removed monument (explain)
- On 9-4-1984 placed a 5/8" x 36" aluminum rod with 3" aluminum
cap DATE stamped as shown. Down .60"

5° East declination

SKETCH OF REFERENCE TIES
Not to Scale

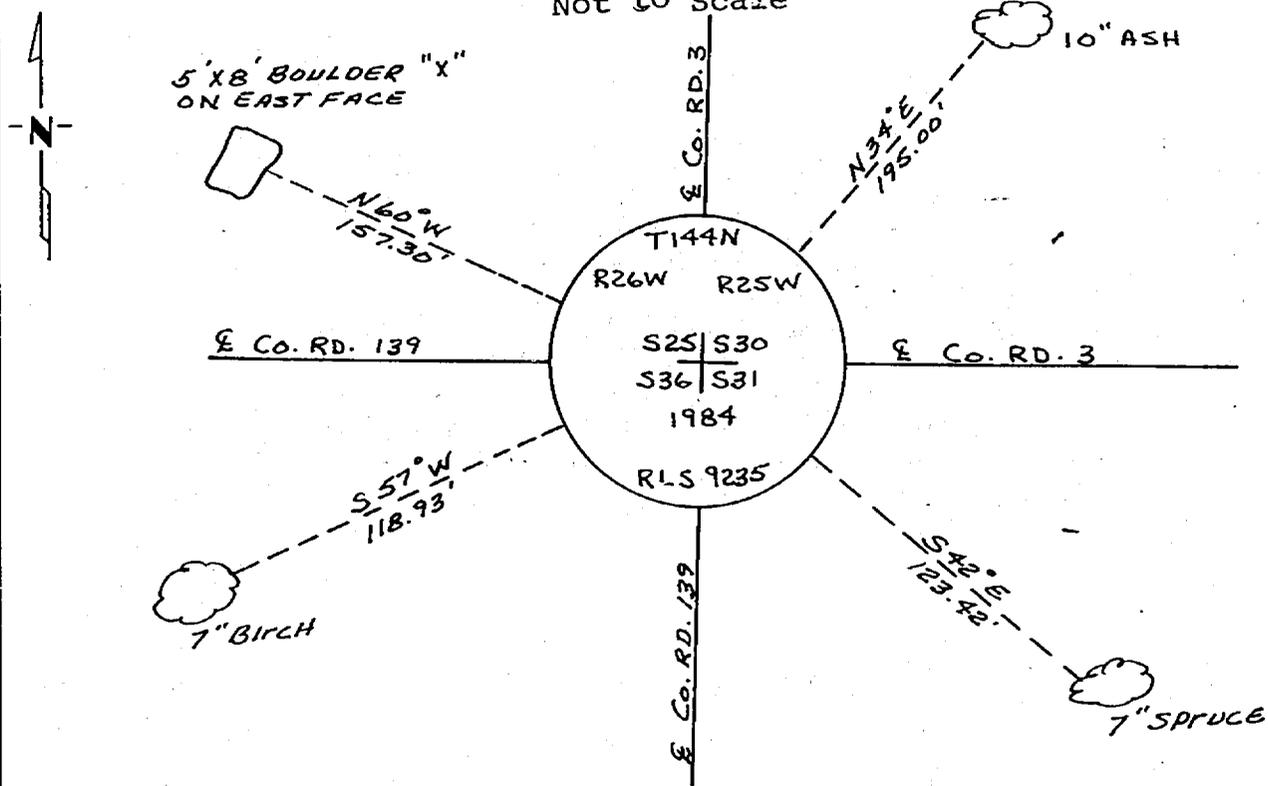

NOTE:

Trees are blazed and scribed with B.T. tags. Distances shown are to a 20d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 4/24/85
SIGNATURE DATE

Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281970
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:10 A.M. on the 15 day of May A.D., 1985

County Recorder Clairline Kaylor
 By MS, Deputy

DOCUMENT NO. 281970

Statement of Evidence:

V1

This corner was originally established in July 2, 1873, by P.H. Congar, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Congar's notes state that a post was set to mark the corner and referenced by the following:

- A 12" Cedar that bears N71°E a distance of 45 links [29.70 feet]
- A 14" Cedar that bears S38°E a distance of 16 links [10.56 feet]
- A 10" Tamarck that bears S70°W a distance of 40 links [26.40 feet]
- A 8" Tamarck that bears N38°W a distance of 18 links [11.88 feet]

In March, 1912, John W. Curo notes state that he found a stake but did not accept it as the corner. He set a new stake for the corner and new references as follows:

- A 12" Cedar that bears N60°W a distance of 18.65 feet
 - A 8" Cedar that bears N85°E a distance of 22.50 feet
- From County Survey Record Book " A ", pages 516 to 518.

On January 31, 1914, John W. Curo's notes state, corner in place and flagged up. This corner is on the centerline of new State Road No. 6. From County Survey Record Book " B ", pages 413 to 417.

In 1919, James Flynn, Deputy Surveyor, finds Cedar stump of Gov't B.T. N71°E a distance of 29.7 feet. From County Survey Record Book " C ", page 175.

On May 3, 1984, personnel from Advance Surveying & Engineering Company, U.S.F.S. and the Cass County Surveyors Office search for this corner position which we determine from our field traverse. With the use of Backhoe we dig a 14' by 8' by 6' deep area in roadbed which is approximately the centerline-centerline position of County Roads. Down 3.6 feet we find a bridge spike with washer, at this depth soil changes from blue clay to darker material, also find a 50d spike .50 feet farther South, down 3.75 feet. We feel Bridge spike is best evidence for corner position and was set during road survey

On September 4, 1984, personnel from Advance Surveying & Engineering Company set a monument as shown on the sketch at the centerline - centerline position and being determined as obliterated.