


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

For the North One-sixteenth Corner on the East Line of Section 8, Township 141 North, Range 29 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.

On November 18, 1981, to mark this corner position, we set a 2.5 inch (outside diameter) by 24 inch long galvanized iron pipe topped with a 3 inch diameter brass tablet, 18 inches below the road surface and stamped as shown in the sketch.

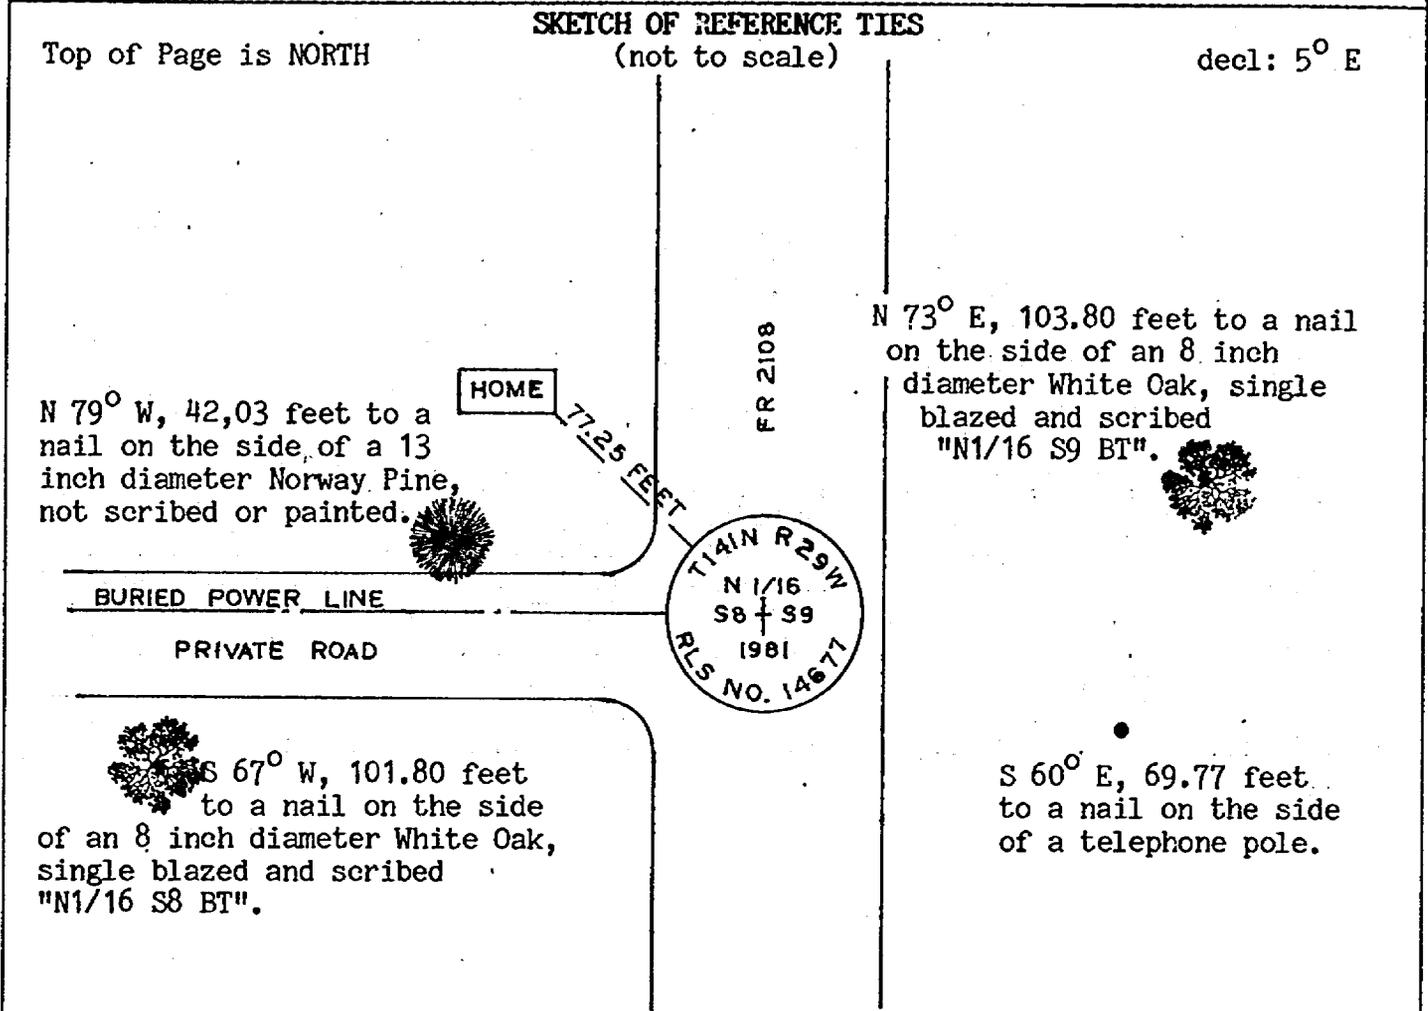

All bearing trees are marked with red enamel, and a USFS 54-3 "BEARING TREE TAG".

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Kenneth L. Whitehorn
Kenneth L. Whitehorn

Date *July 2, 1986* Registration No. 14677

290144

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 16 day of July, 19 86, at 9:00 A.M. and assigned DOCUMENT NUMBER 290144.

Claudine Kaylor
Claudine Kaylor, County Recorder
ms

STATEMENT OF EVIDENCE: The North One-sixteenth Corner on the East Line of Section 8, Township 141 North, Range 29 West of the 5th Principal Meridian.

This corner position was not monumented in the original Township survey by P. H. Conger, Deputy Surveyor, under contract to the General Land Office in 1873. The notes for this survey are on file in the Office of the Secretary of State, St. Paul, Minnesota.

In 1918, Earl B. Harrington, U.S. Surveyor of the General Land Office, executed a dependent resurvey and subdivision of Sections in this township under instructions in Group No. 2, Minnesota, issued September 11, 1917. He set a 1" diameter by 36" long iron monument with a brass cap and marked it to identify the corner and witnessed by: a 15 inch diameter Red Oak that bears SOUTH 16 degrees 45 minutes EAST, a distance of 203 links (133.98 feet); and a 10 inch diameter Poplar that bears SOUTH 86 degrees 30 minutes WEST a distance of 47 links (31.02 feet).

In 1949, Harold Curo, Cass County Surveyor, filed "Auditors Plat No. 11" which is recorded in Book D, Page 361, Survey Record No. 627, in the Office of the Cass County Recorder, Walker, MN. Mr. Curo states he found this General Land Office monument in place in the road but no evidence of the bearing trees remain. He marked the following new accessories: a 6 inch diameter Birch that bears SOUTH 35 degrees WEST a distance of 65.80 feet; and a 5 inch diameter Birch that bears SOUTH 54 degrees EAST a distance of 52.73 feet.

On June 19, 1981, Curt Krause, Gary Brama, USDA-Forest Service determined a search area for this corner position using single proportionate methods based on coordinates determined from an EDM/Levelling traverse between the East Quarter Corner of Section 8 and Meander Corner on the south side of Leech Lake between Sections 8 and 9. After searching this location a GLO monument was found broken in three pieces. The brass cap was damaged but readable. A power cable found to be under the corner search area was the probable cause of the damage to the monument. There was no evidence found of the 1917 GLO bearing trees or the 1949 Curo bearing trees. This proportionate position was monumented and referenced as shown on the front of this document.