


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 24, Township 143 N, Range 28 W, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7/29/86 placed a 2"x60" galv. iron pipe with brass cap. 18"
DATE
above surface, on the north edge of field.

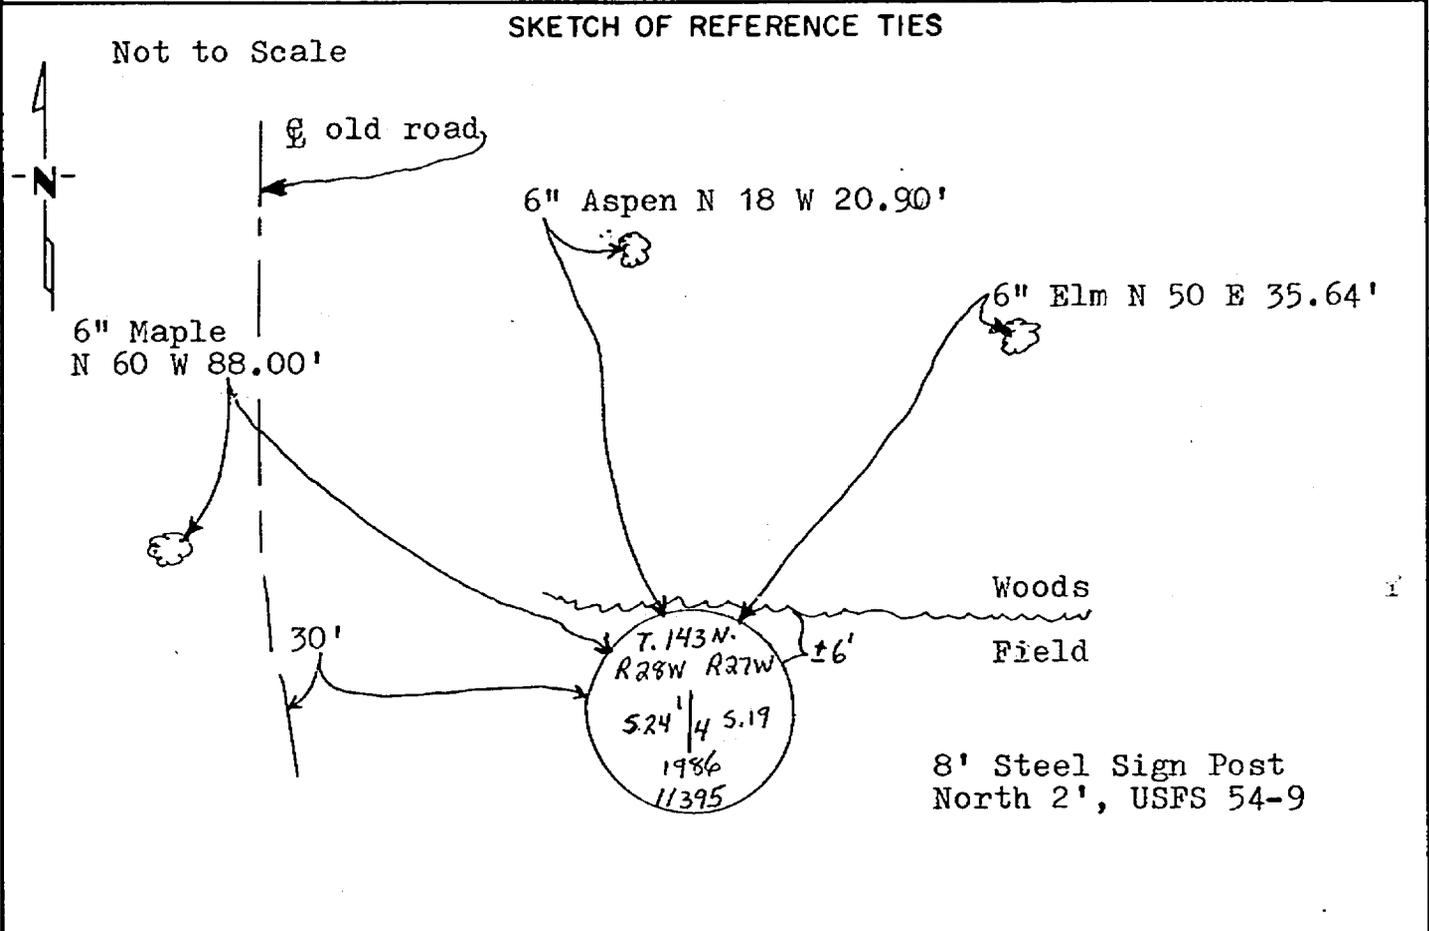

All measurements are to nails in side of trees, trees are double blazed scribed and painted red with USFS 54-3 bearing tree tags attached

Statement of evidence relative to this corner location is on back of page. 291482

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 9-4-86
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:42 P.M. on the 5 day of Sept. A.D., 1986

Register of Deeds Clouline Kayler
 By MS, Deputy

DOCUMENT NO. 291482

Statement of Evidence: East Quarter Corner Section 24, T. 143 N., R. 28 W.,
5th P.M.

- 1873 U.S. General Land Office survey set a wood post for this corner and marked the following bearings: 10" Birch S 40 E 9 lks; 6" Birch S 50 E 9 lks.
- 1920 County Survey Record Book "C", page 394-396, shows a survey by Ben Clark. He found a point of a cedar post and set 3"x30" iron post with cap.
- 1920 County Resurvey Plat "E-7", by E.B. Horst, shows a corner.
- 1986 On July 29, Walt Curo set a 2x60" galv. I.P. with brass cap by single proportion between the Northeast and Southeast corners of Section 24