

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

On 9/30/86 found a 1 1/2" x 2' iron pipe flush with ground


DATE

left monument as found, lowered monument, removed monument (explain)

On 9/30/86 placed a cast iron monument down 0.5' in line with centerlines

E & S

SKETCH OF REFERENCE TIES

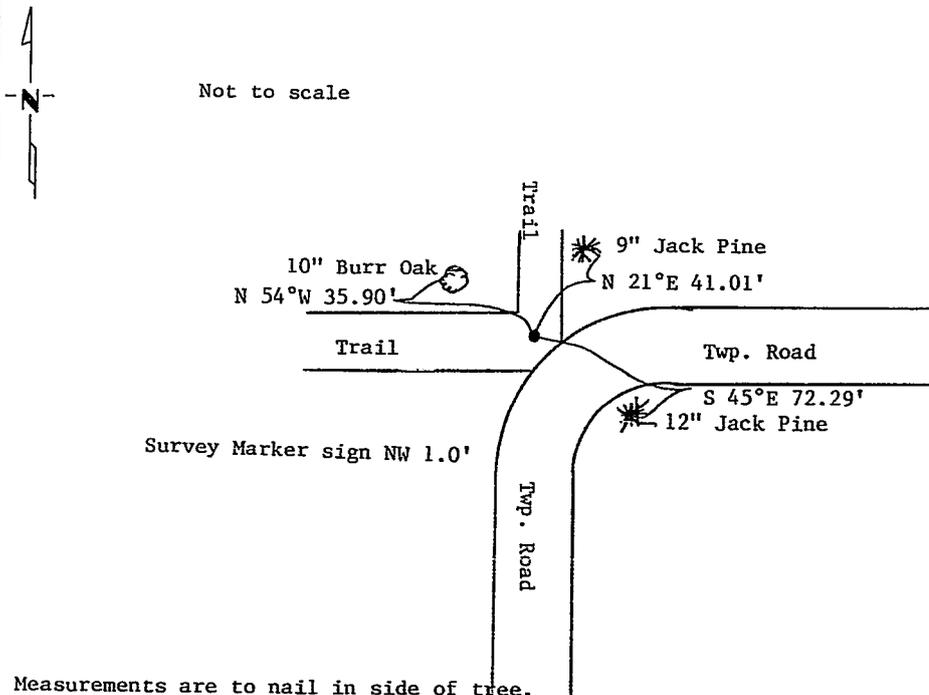

Measurements are to nail in side of tree.
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page.

297505

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Larson
SIGNATURE

1-23-87
DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:50 A.M. on the 12 day of June A.D., 19 87

County Recorder Clairine Kaylor

By MS, Deputy

DOCUMENT NO. 297505

Statement of Evidence: Northeast Corner Section 31, T. 135 N., R. 32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 12" Bl Pine N 16°E 100 lks., 12" Bl. Pine N 20°W 154 lks., 8" Bl. Pine S 22°W 41 lks.
- 1986 On Sept. 30, Terry Freeman, Cass County Surveyors Office and Jim Cripps and Norman Maunu found 1½" x 2' I.P. flush. Replaced with cast iron monument down 6', inline with centerline twp road E & S and trail W.

Although there is not a record of the found iron pipe, the Cass County Surveyors Office accepts the iron as perpetuation of the original corner.