

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


WEST QUARTER Corner of Section 11, Township 139, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1/13/87 found a 2" IRON PIPE lying down on its side in a swamp.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/16/87 placed a 2" x 2" SQUARE IRON with an ALUMINUM CAP
DATE

SKETCH OF REFERENCE TIES

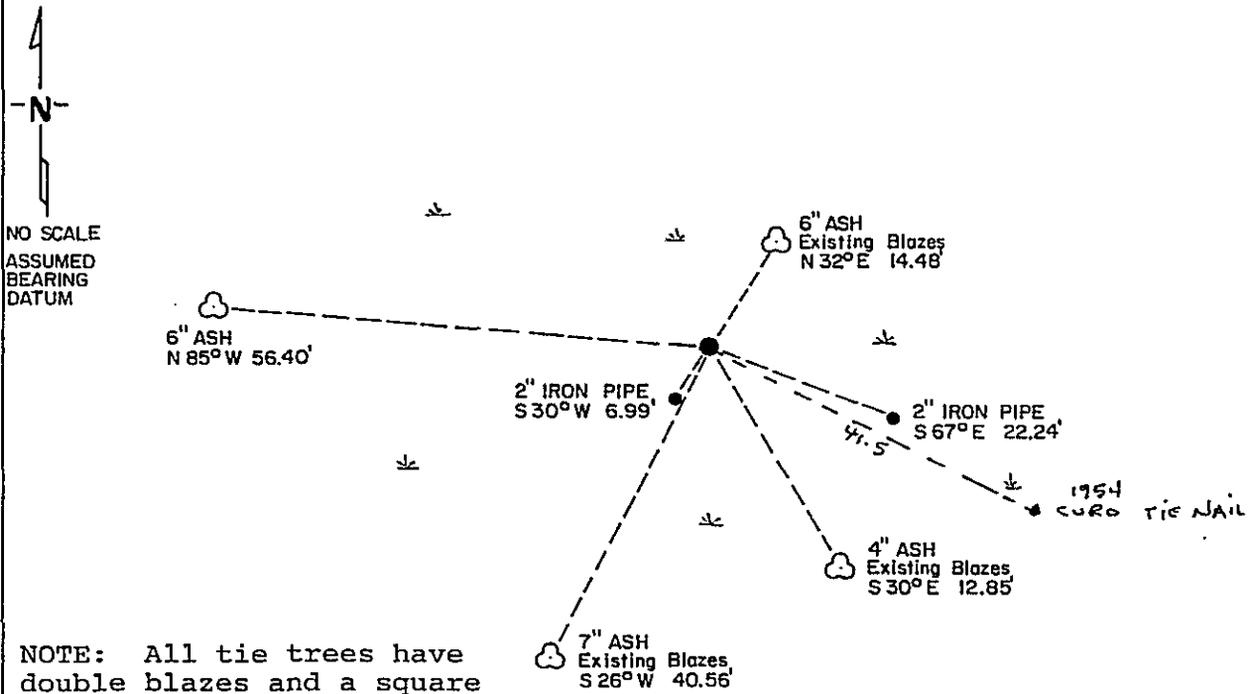

NOTE: All tie trees have double blazes and a square disc in side of tree where distance was taken

Statement of evidence relative to this corner location is on back of page. 298532

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Linderhan 6/24/87
SIGNATURE DATE

Registration No. 17008
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the RECORDER'S office at 3:20 P.M. on the 29 day of July A.D., 1987

COUNTY RECORDER Claudine Kayler
By MS, Deputy
DOCUMENT NO. 298532

STATEMENT OF EVIDENCE

West Quarter corner, Section 11, Township 139 North, Range 30
West, 5th principal meridian, Cass County, Minnesota.

- 1865 - U. S. General Land Office set a wood post for this corner and marked the following bearing trees: 7" w. birch South 15 degrees West 5 lks, 6" tamarak North 23 degrees East 20 lks.
- 1925 - J. M. Greene re-establishes and sets said quarter corner during subdivision and platting work within Section 11, Notes in Book 190, Page 3 & 4 (Curo records) Plat of Luroy Bay.
- 1954 - H. Curo finds corner set by Greene in 1925 and also finds a pipe set by G. Holmstrom, Curo uses Greene's established corner and sets a reference point Southeasterly 41.5 feet from said corner notes in Book 234, Page 115 (Curo records)
- 1957 - G. Holmstrom surveys Plat of Vincents 4 Point Shores using incorrect corner, not being same as established by Greene and confirmed by Curo.
- 1987 - Landecker & Associates, Inc. surveyors while surveying in Section 11 found the Greene and Curo corner in place and also find the Curo reference point in place 41.5 feet to the Southeast of this corner location, and accept this corner to be a perpetuation of the West Quarter corner as established by Greene.